


Slotted Raised Countersunk Head Screw DIN 964 - Steel 4.8, Zinc plated

Slotted Raised Countersunk Head Screw to DIN 964, in the sizes, grades and finishes listed.

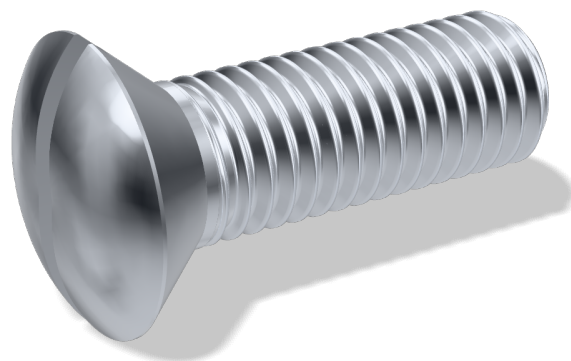

TECHNICAL DATA

General

Standard	DIN 964
----------	---------

Dimensions



Thread form	Metric ISO thread
-------------	-------------------

Materials & Finish

Head type	Raised countersunk
-----------	--------------------

Drive type	Slotted
Property class / grade	4.8
Material	Steel
Surface finish	Zinc plated

DIMENSIONS

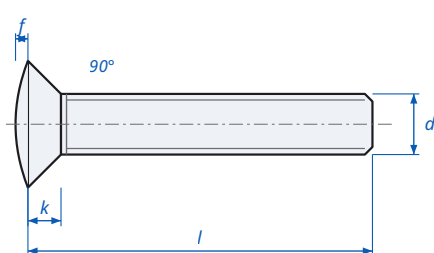

d	Thread diameter
l	Length
k	Head height
dk	Head diameter
f	Raised head height

Slotted Raised Countersunk Head Screw DIN 964 - dimensions

AVAILABLE PART NUMBERS

Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Raised head height (f)	Weight
FBR01H4Z02005	M2	5 mm	0.4 mm	1.2 mm	3.8 mm	0.5 mm	0.156 g
FBR01H4Z02006	M2	6 mm	0.4 mm	1.2 mm	3.8 mm	0.5 mm	0.175 g
FBR01H4Z02008	M2	8 mm	0.4 mm	1.2 mm	3.8 mm	0.5 mm	0.212 g
FBR01H4Z02010	M2	10 mm	0.4 mm	1.2 mm	3.8 mm	0.5 mm	0.25 g
FBR01H4Z02012	M2	12 mm	0.4 mm	1.2 mm	3.8 mm	0.5 mm	0.287 g
FBR01H4Z02014	M2	14 mm	0.4 mm	1.2 mm	3.8 mm	0.5 mm	0.325 g



Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Raised head height (f)	Weight
FBR01H4Z02016	M2	16 mm	0.4 mm	1.2 mm	3.8 mm	0.5 mm	0.362 g
FBR01H4Z02020	M2	20 mm	0.4 mm	1.2 mm	3.8 mm	0.5 mm	0.438 g
FBR01H4ZC3005	M2.3	5 mm	0.4 mm	–	–	–	–
FBR01H4ZC3006	M2.3	6 mm	0.4 mm	–	–	–	–
FBR01H4ZC3008	M2.3	8 mm	0.4 mm	–	–	–	–
FBR01H4ZC3010	M2.3	10 mm	0.4 mm	–	–	–	–
FBR01H4ZC3012	M2.3	12 mm	0.4 mm	–	–	–	–
FBR01H4ZC3016	M2.3	16 mm	0.4 mm	–	–	–	–
FBR01H4ZC3020	M2.3	20 mm	0.4 mm	–	–	–	–
FBR01H4ZC5005	M2.5	5 mm	0.45 mm	1.5 mm	4.7 mm	0.6 mm	0.272 g
FBR01H4ZC5006	M2.5	6 mm	0.45 mm	1.5 mm	4.7 mm	0.6 mm	0.302 g
FBR01H4ZC5008	M2.5	8 mm	0.45 mm	1.5 mm	4.7 mm	0.6 mm	0.362 g
FBR01H4ZC5010	M2.5	10 mm	0.45 mm	1.5 mm	4.7 mm	0.6 mm	0.422 g
FBR01H4ZC5012	M2.5	12 mm	0.45 mm	1.5 mm	4.7 mm	0.6 mm	0.482 g
FBR01H4ZC5014	M2.5	14 mm	0.45 mm	1.5 mm	4.7 mm	0.6 mm	0.543 g
FBR01H4ZC5016	M2.5	16 mm	0.45 mm	1.5 mm	4.7 mm	0.6 mm	0.603 g
FBR01H4ZC5018	M2.5	18 mm	0.45 mm	1.5 mm	4.7 mm	0.6 mm	0.663 g
FBR01H4ZC5020	M2.5	20 mm	0.45 mm	1.5 mm	4.7 mm	0.6 mm	0.723 g
FBR01H4ZC5022	M2.5	22 mm	0.45 mm	1.5 mm	4.7 mm	0.6 mm	0.783 g
FBR01H4ZC5025	M2.5	25 mm	0.45 mm	1.5 mm	4.7 mm	0.6 mm	0.874 g
FBR01H4ZC5030	M2.5	30 mm	0.45 mm	1.5 mm	4.7 mm	0.6 mm	1.026 g
FBR01H4ZC6005	M2.6	5 mm	0.45 mm	–	–	–	–
FBR01H4ZC6006	M2.6	6 mm	0.45 mm	–	–	–	–
FBR01H4ZC6008	M2.6	8 mm	0.45 mm	–	–	–	–
FBR01H4ZC6010	M2.6	10 mm	0.45 mm	–	–	–	–
FBR01H4ZC6012	M2.6	12 mm	0.45 mm	–	–	–	–
FBR01H4ZC6014	M2.6	14 mm	0.45 mm	–	–	–	–
FBR01H4ZC6016	M2.6	16 mm	0.45 mm	–	–	–	–
FBR01H4ZC6018	M2.6	18 mm	0.45 mm	–	–	–	–
FBR01H4ZC6020	M2.6	20 mm	0.45 mm	–	–	–	–
FBR01H4ZC6025	M2.6	25 mm	0.45 mm	–	–	–	–
FBR01H4Z03004	M3	4 mm	0.5 mm	1.65 mm	5.6 mm	0.75 mm	0.351 g
FBR01H4Z03005	M3	5 mm	0.5 mm	1.65 mm	5.6 mm	0.75 mm	0.395 g
FBR01H4Z03006	M3	6 mm	0.5 mm	1.65 mm	5.6 mm	0.75 mm	0.439 g
FBR01H4Z03008	M3	8 mm	0.5 mm	1.65 mm	5.6 mm	0.75 mm	0.527 g
FBR01H4Z03010	M3	10 mm	0.5 mm	1.65 mm	5.6 mm	0.75 mm	0.615 g
FBR01H4Z03012	M3	12 mm	0.5 mm	1.65 mm	5.6 mm	0.75 mm	0.703 g



Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Raised head height (f)	Weight
FBR01H4Z03014	M3	14 mm	0.5 mm	1.65 mm	5.6 mm	0.75 mm	0.791 g
FBR01H4Z03016	M3	16 mm	0.5 mm	1.65 mm	5.6 mm	0.75 mm	0.88 g
FBR01H4Z03018	M3	18 mm	0.5 mm	1.65 mm	5.6 mm	0.75 mm	0.968 g
FBR01H4Z03020	M3	20 mm	0.5 mm	1.65 mm	5.6 mm	0.75 mm	1.06 g
FBR01H4Z03022	M3	22 mm	0.5 mm	1.65 mm	5.6 mm	0.75 mm	1.14 g
FBR01H4Z03025	M3	25 mm	0.5 mm	1.65 mm	5.6 mm	0.75 mm	1.28 g
FBR01H4Z03030	M3	30 mm	0.5 mm	1.65 mm	5.6 mm	0.75 mm	1.5 g
FBR01H4Z03035	M3	35 mm	0.5 mm	1.65 mm	5.6 mm	0.75 mm	1.725 g
FBR01H4Z03040	M3	40 mm	0.5 mm	1.65 mm	5.6 mm	0.75 mm	1.95 g
FBR01H4ZD5005	M3.5	5 mm	0.6 mm	1.93 mm	6.5 mm	0.9 mm	0.596 g
FBR01H4ZD5006	M3.5	6 mm	0.6 mm	1.93 mm	6.5 mm	0.9 mm	0.656 g
FBR01H4ZD5008	M3.5	8 mm	0.6 mm	1.93 mm	6.5 mm	0.9 mm	0.775 g
FBR01H4ZD5010	M3.5	10 mm	0.6 mm	1.93 mm	6.5 mm	0.9 mm	0.894 g
FBR01H4ZD5012	M3.5	12 mm	0.6 mm	1.93 mm	6.5 mm	0.9 mm	1.01 g
FBR01H4ZD5014	M3.5	14 mm	0.6 mm	1.93 mm	6.5 mm	0.9 mm	1.13 g
FBR01H4ZD5016	M3.5	16 mm	0.6 mm	1.93 mm	6.5 mm	0.9 mm	1.25 g
FBR01H4ZD5018	M3.5	18 mm	0.6 mm	1.93 mm	6.5 mm	0.9 mm	1.37 g
FBR01H4ZD5020	M3.5	20 mm	0.6 mm	1.93 mm	6.5 mm	0.9 mm	1.49 g
FBR01H4ZD5022	M3.5	22 mm	0.6 mm	1.93 mm	6.5 mm	0.9 mm	1.61 g
FBR01H4ZD5025	M3.5	25 mm	0.6 mm	1.93 mm	6.5 mm	0.9 mm	1.79 g
FBR01H4ZD5030	M3.5	30 mm	0.6 mm	1.93 mm	6.5 mm	0.9 mm	2.09 g
FBR01H4ZD5040	M3.5	40 mm	0.6 mm	1.93 mm	6.5 mm	0.9 mm	2.69 g
FBR01H4Z04005	M4	5 mm	0.7 mm	2.2 mm	7.5 mm	1 mm	0.824 g
FBR01H4Z04006	M4	6 mm	0.7 mm	2.2 mm	7.5 mm	1 mm	0.902 g
FBR01H4Z04008	M4	8 mm	0.7 mm	2.2 mm	7.5 mm	1 mm	1.06 g
FBR01H4Z04010	M4	10 mm	0.7 mm	2.2 mm	7.5 mm	1 mm	1.21 g
FBR01H4Z04012	M4	12 mm	0.7 mm	2.2 mm	7.5 mm	1 mm	1.37 g
FBR01H4Z04014	M4	14 mm	0.7 mm	2.2 mm	7.5 mm	1 mm	1.52 g
FBR01H4Z04016	M4	16 mm	0.7 mm	2.2 mm	7.5 mm	1 mm	1.68 g
FBR01H4Z04018	M4	18 mm	0.7 mm	2.2 mm	7.5 mm	1 mm	1.83 g
FBR01H4Z04020	M4	20 mm	0.7 mm	2.2 mm	7.5 mm	1 mm	1.99 g
FBR01H4Z04022	M4	22 mm	0.7 mm	2.2 mm	7.5 mm	1 mm	2.14 g
FBR01H4Z04025	M4	25 mm	0.7 mm	2.2 mm	7.5 mm	1 mm	2.37 g
FBR01H4Z04030	M4	30 mm	0.7 mm	2.2 mm	7.5 mm	1 mm	2.76 g
FBR01H4Z04035	M4	35 mm	0.7 mm	2.2 mm	7.5 mm	1 mm	3.15 g
FBR01H4Z04040	M4	40 mm	0.7 mm	2.2 mm	7.5 mm	1 mm	3.53 g
FBR01H4Z04045	M4	45 mm	0.7 mm	2.2 mm	7.5 mm	1 mm	3.91 g



Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Raised head height (f)	Weight
FBR01H4Z04050	M4	50 mm	0.7 mm	2.2 mm	7.5 mm	1 mm	4.29 g
FBR01H4Z05006	M5	6 mm	0.8 mm	2.5 mm	9.2 mm	1.25 mm	1.483 g
FBR01H4Z05008	M5	8 mm	0.8 mm	2.5 mm	9.2 mm	1.25 mm	1.732 g
FBR01H4Z05010	M5	10 mm	0.8 mm	2.5 mm	9.2 mm	1.25 mm	1.98 g
FBR01H4Z05012	M5	12 mm	0.8 mm	2.5 mm	9.2 mm	1.25 mm	2.23 g
FBR01H4Z05014	M5	14 mm	0.8 mm	2.5 mm	9.2 mm	1.25 mm	2.47 g
FBR01H4Z05016	M5	16 mm	0.8 mm	2.5 mm	9.2 mm	1.25 mm	2.72 g
FBR01H4Z05018	M5	18 mm	0.8 mm	2.5 mm	9.2 mm	1.25 mm	2.97 g
FBR01H4Z05020	M5	20 mm	0.8 mm	2.5 mm	9.2 mm	1.25 mm	3.22 g
FBR01H4Z05022	M5	22 mm	0.8 mm	2.5 mm	9.2 mm	1.25 mm	3.46 g
FBR01H4Z05025	M5	25 mm	0.8 mm	2.5 mm	9.2 mm	1.25 mm	3.83 g
FBR01H4Z05030	M5	30 mm	0.8 mm	2.5 mm	9.2 mm	1.25 mm	4.44 g
FBR01H4Z05035	M5	35 mm	0.8 mm	2.5 mm	9.2 mm	1.25 mm	4.93 g
FBR01H4Z05040	M5	40 mm	0.8 mm	2.5 mm	9.2 mm	1.25 mm	5.68 g
FBR01H4Z05045	M5	45 mm	0.8 mm	2.5 mm	9.2 mm	1.25 mm	6.3 g
FBR01H4Z05050	M5	50 mm	0.8 mm	2.5 mm	9.2 mm	1.25 mm	6.93 g
FBR01H4Z05060	M5	60 mm	0.8 mm	2.5 mm	9.2 mm	1.25 mm	8.19 g
FBR01H4Z06008	M6	8 mm	1 mm	3 mm	11 mm	1.5 mm	2.66 g
FBR01H4Z06010	M6	10 mm	1 mm	3 mm	11 mm	1.5 mm	3.01 g
FBR01H4Z06012	M6	12 mm	1 mm	3 mm	11 mm	1.5 mm	3.36 g
FBR01H4Z06014	M6	14 mm	1 mm	3 mm	11 mm	1.5 mm	3.72 g
FBR01H4Z06016	M6	16 mm	1 mm	3 mm	11 mm	1.5 mm	4.07 g
FBR01H4Z06018	M6	18 mm	1 mm	3 mm	11 mm	1.5 mm	4.42 g
FBR01H4Z06020	M6	20 mm	1 mm	3 mm	11 mm	1.5 mm	4.78 g
FBR01H4Z06022	M6	22 mm	1 mm	3 mm	11 mm	1.5 mm	5.13 g
FBR01H4Z06025	M6	25 mm	1 mm	3 mm	11 mm	1.5 mm	5.66 g
FBR01H4Z06030	M6	30 mm	1 mm	3 mm	11 mm	1.5 mm	6.55 g
FBR01H4Z06035	M6	35 mm	1 mm	3 mm	11 mm	1.5 mm	7.43 g
FBR01H4Z06040	M6	40 mm	1 mm	3 mm	11 mm	1.5 mm	8.31 g
FBR01H4Z06045	M6	45 mm	1 mm	3 mm	11 mm	1.5 mm	9.2 g
FBR01H4Z06050	M6	50 mm	1 mm	3 mm	11 mm	1.5 mm	10.1 g
FBR01H4Z06060	M6	60 mm	1 mm	3 mm	11 mm	1.5 mm	11.9 g
FBR01H4Z06070	M6	70 mm	1 mm	3 mm	11 mm	1.5 mm	13.7 g
FBR01H4Z08016	M8	16 mm	1.25 mm	4 mm	14.5 mm	2 mm	8.05 g
FBR01H4Z08018	M8	18 mm	1.25 mm	4 mm	14.5 mm	2 mm	8.68 g
FBR01H4Z08020	M8	20 mm	1.25 mm	4 mm	14.5 mm	2 mm	9.32 g
FBR01H4Z08022	M8	22 mm	1.25 mm	4 mm	14.5 mm	2 mm	9.95 g



Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Raised head height (f)	Weight
FBR01H4Z08025	M8	25 mm	1.25 mm	4 mm	14.5 mm	2 mm	10.9 g
FBR01H4Z08030	M8	30 mm	1.25 mm	4 mm	14.5 mm	2 mm	12.5 g
FBR01H4Z08035	M8	35 mm	1.25 mm	4 mm	14.5 mm	2 mm	14.1 g
FBR01H4Z08040	M8	40 mm	1.25 mm	4 mm	14.5 mm	2 mm	15.7 g
FBR01H4Z08045	M8	45 mm	1.25 mm	4 mm	14.5 mm	2 mm	17.3 g
FBR01H4Z08050	M8	50 mm	1.25 mm	4 mm	14.5 mm	2 mm	18.9 g
FBR01H4Z08060	M8	60 mm	1.25 mm	4 mm	14.5 mm	2 mm	22.1 g
FBR01H4Z08070	M8	70 mm	1.25 mm	4 mm	14.5 mm	2 mm	25.3 g
FBR01H4Z10020	M10	20 mm	1.5 mm	5 mm	18 mm	2.5 mm	15.7 g
FBR01H4Z10025	M10	25 mm	1.5 mm	5 mm	18 mm	2.5 mm	18.2 g
FBR01H4Z10030	M10	30 mm	1.5 mm	5 mm	18 mm	2.5 mm	20.7 g
FBR01H4Z10035	M10	35 mm	1.5 mm	5 mm	18 mm	2.5 mm	23.7 g
FBR01H4Z10040	M10	40 mm	1.5 mm	5 mm	18 mm	2.5 mm	25.7 g
FBR01H4Z10045	M10	45 mm	1.5 mm	5 mm	18 mm	2.5 mm	28.2 g
FBR01H4Z10050	M10	50 mm	1.5 mm	5 mm	18 mm	2.5 mm	30.7 g
FBR01H4Z10060	M10	60 mm	1.5 mm	5 mm	18 mm	2.5 mm	35.8 g

Part numbers: 133

STANDARDS & CERTIFICATES

Standards

DIN 964 – Slotted Raised Countersunk Head Screw

