


Countersunk Serrated Lock Washer DIN 6798V - Stainless steel A2, Plain

Countersunk Serrated Lock Washer to DIN 6798V, in the sizes, grades and finishes listed.

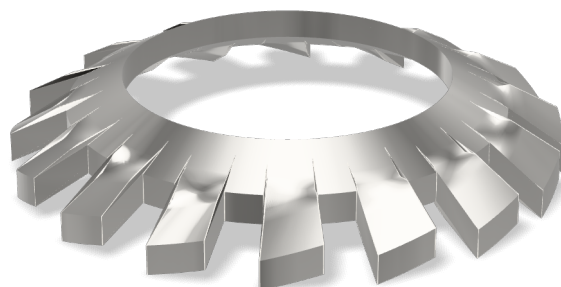

TECHNICAL DATA

General



Standard	DIN 6798V
----------	-----------

Materials & Finish

Property class / grade	A2 stainless
------------------------	--------------

Material	Stainless steel
Surface finish	Plain

DIMENSIONS



s	Thickness
d1	Inner diameter
d2	Outer diameter

Countersunk Serrated Lock Washer DIN 6798V - dimensions

AVAILABLE PART NUMBERS

Part number	Variant	Size	Inner diameter (d1)	Outer diameter (d2)	Thickness (s)	Weight
FWL13A2P03000	M3.2 A2 stainless	M3	3.2 mm	6 mm	0.2 mm	0.0404 g
FWL13A2P04000	M4.3 A2 stainless	M4	4.3 mm	8 mm	0.25 mm	0.101 g
FWL13A2P05000	M5.3 A2 stainless	M5	5.3 mm	9.8 mm	0.3 mm	0.202 g
FWL13A2P06000	M6.4 A2 stainless	M6	6.4 mm	11.8 mm	0.4 mm	0.303 g
FWL13A2P08000	M8.4 A2 stainless	M8	8.4 mm	15.3 mm	0.4 mm	0.505 g
FWL13A2P10000	M11 A2 stainless	M10	11 mm	—	—	—
FWL13A2P12000	M13 A2 stainless	M12	13 mm	23 mm	0.5 mm	1.515 g
FWL13A2P16000	M17 A2 stainless	M16	17 mm	30.2 mm	0.6 mm	2.323 g

Part numbers: 8





STANDARDS & CERTIFICATES

Standards

DIN 6798V – Countersunk Serrated Lock Washer

