


Hex Socket Pipe Plug Tapered DIN 906 - Steel, Zinc plated

Hex Socket Pipe Plug Tapered to DIN 906, in the sizes, grades and finishes listed.

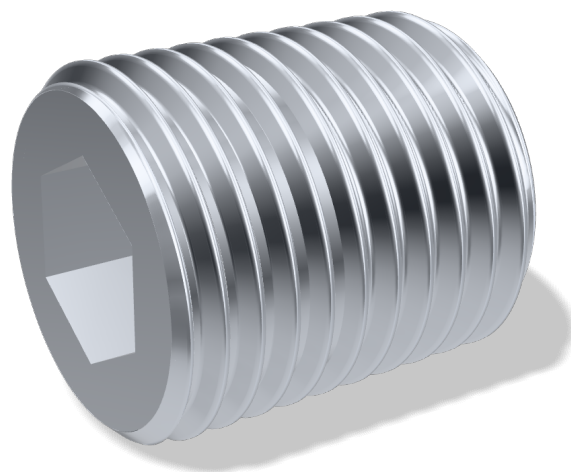

TECHNICAL DATA

General


Standard	DIN 906
----------	---------

Materials & Finish

Drive type	Hexagon socket
------------	----------------

Property class / grade	Steel
Material	Steel
Surface finish	Zinc plated

DIMENSIONS

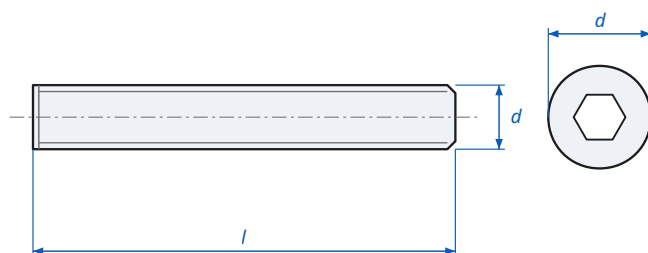

d Thread size

l Length

Hex Socket Pipe Plug Tapered DIN 906 - dimensions

AVAILABLE PART NUMBERS

Part number	Size (d)	Thread pitch	Hex key size	Weight
FXS02STZN2000	M8x1	1 mm	4 mm	2.07 g
FXS02STZN3000	M10x1	1 mm	5 mm	3.38 g
FXS02STZN4000	M12x1.5	1.5 mm	6 mm	6.1 g
FXS02STZN5000	M14x1.5	1.5 mm	7 mm	8.1 g
FXS02STZN6000	M16x1.5	1.5 mm	8 mm	11 g
FXS02STZN7000	M18x1.5	1.5 mm	8 mm	14.6 g



Part number	Size (d)	Thread pitch	Hex key size	Weight
FXS02STZN8000	M20x1.5	1.5 mm	10 mm	17.6 g
FXS02STZN9000	M22x1.5	1.5 mm	10 mm	22 g
FXS02STZP0000	M24x1.5	1.5 mm	12 mm	30.8 g
FXS02STZR7000	M26x1.5	1.5 mm	12 mm	38.6 g
FXS02STZP1000	M27x2	2 mm	12 mm	40.2 g
FXS02STZP2000	M30x1.5	1.5 mm	17 mm	44 g
FXS02STZP3000	M30x2	2 mm	17 mm	44 g
FXS02STZP4000	M33x2	2 mm	17 mm	57.5 g
FXS02STZP5000	M36x1.5	1.5 mm	19 mm	85.2 g
FXS02STZP8000	M42x1.5	1.5 mm	22 mm	135 g
FXS02STZP9000	M42x2	2 mm	22 mm	135 g
FXS02STZQ3000	M48x2	2 mm	24 mm	214 g
FXS02STZQ5000	M52x2	2 mm	24 mm	253 g
FXS02STZQ6000	M56x2	2 mm	32 mm	274 g
FXS02STZQ7000	M60x2	2 mm	32 mm	350 g
FXS02STZQ9000	R 1	–	–	–
FXS02STZR0000	R 1-1/2	–	–	–
FXS02STZR1000	R 1-1/4	–	–	–
FXS02STZR2000	R 1/2	–	–	–
FXS02STZR3000	R 1/4	–	–	–
FXS02STZR4000	R 1/8	–	–	–
FXS02STZR5000	R 3/4	–	–	–
FXS02STZR6000	R 3/8	–	–	–

Part numbers: 29

STANDARDS & CERTIFICATES

Standards

DIN 906 – Hex Socket Pipe Plug Tapered

