


Cross Recessed Countersunk Head Screw DIN 965 / ISO 7046-1 - Stainless steel A2, Plain

Cross Recessed Countersunk Head Screw to DIN 965 / ISO 7046-1, in the sizes, grades and finishes listed.

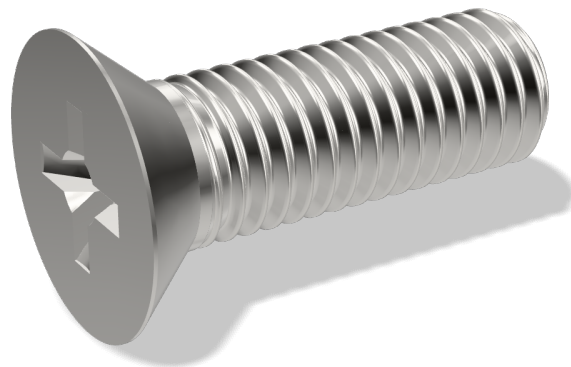

TECHNICAL DATA

Dimensions



Thread form	Metric ISO thread
-------------	-------------------

Materials & Finish

Head type	Countersunk
Drive type	Phillips

Property class / grade	A2 stainless
Material	Stainless steel
Surface finish	Plain

DIMENSIONS

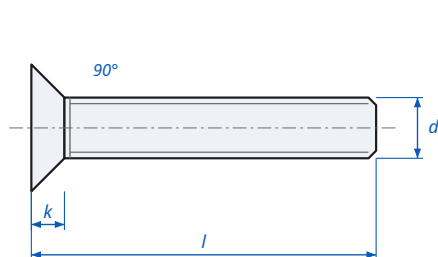

d	Thread diameter
l	Length
k	Head height
dk	Head diameter

Cross Recessed Countersunk Head Screw DIN 965 / ISO 7046-1 - dimensions

AVAILABLE PART NUMBERS

Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Weight
FBK04A2PB6002	M1.6	2 mm	0.35 mm	0.96 mm	3 mm	0.0448 g
FBK04A2PB6003	M1.6	3 mm	0.35 mm	0.96 mm	3 mm	0.0566 g
FBK04A2PB6004	M1.6	4 mm	0.35 mm	0.96 mm	3 mm	0.0683 g
FBK04A2PB6005	M1.6	5 mm	0.35 mm	0.96 mm	3 mm	0.08 g
FBK04A2PB6006	M1.6	6 mm	0.35 mm	0.96 mm	3 mm	0.0917 g
FBK04A2PB6008	M1.6	8 mm	0.35 mm	0.96 mm	3 mm	0.1151 g



Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Weight
FBK04A2PB6010	M1.6	10 mm	0.35 mm	0.96 mm	3 mm	0.1387 g
FBK04A2PB6012	M1.6	12 mm	0.35 mm	0.96 mm	3 mm	0.1621 g
FBK04A2PB6014	M1.6	14 mm	0.35 mm	0.96 mm	3 mm	0.1855 g
FBK04A2PB6016	M1.6	16 mm	0.35 mm	0.96 mm	3 mm	0.2091 g
FBK04A2PB6018	M1.6	18 mm	0.35 mm	0.96 mm	3 mm	0.2325 g
FBK04A2PB6020	M1.6	20 mm	0.35 mm	0.96 mm	3 mm	0.2559 g
FBK08A2P02003	M2	3 mm	0.4 mm	1.2 mm	3.8 mm	0.0988 g
FBK08A2P02004	M2	4 mm	0.4 mm	1.2 mm	3.8 mm	0.1177 g
FBK08A2P02005	M2	5 mm	0.4 mm	1.2 mm	3.8 mm	0.1366 g
FBK08A2P02006	M2	6 mm	0.4 mm	1.2 mm	3.8 mm	0.1553 g
FBK08A2P02008	M2	8 mm	0.4 mm	1.2 mm	3.8 mm	0.193 g
FBK08A2P02010	M2	10 mm	0.4 mm	1.2 mm	3.8 mm	0.2308 g
FBK08A2P02012	M2	12 mm	0.4 mm	1.2 mm	3.8 mm	0.2685 g
FBK08A2P02014	M2	14 mm	0.4 mm	1.2 mm	3.8 mm	0.3061 g
FBK08A2P02016	M2	16 mm	0.4 mm	1.2 mm	3.8 mm	0.3439 g
FBK08A2P02018	M2	18 mm	0.4 mm	1.2 mm	3.8 mm	0.3816 g
FBK08A2P02020	M2	20 mm	0.4 mm	1.2 mm	3.8 mm	0.4193 g
FBK08A2PC5003	M2.5	3 mm	0.45 mm	1.5 mm	4.7 mm	0.1767 g
FBK08A2PC5004	M2.5	4 mm	0.45 mm	1.5 mm	4.7 mm	0.2081 g
FBK08A2PC5005	M2.5	5 mm	0.45 mm	1.5 mm	4.7 mm	0.2384 g
FBK08A2PC5006	M2.5	6 mm	0.45 mm	1.5 mm	4.7 mm	0.2687 g
FBK08A2PC5008	M2.5	8 mm	0.45 mm	1.5 mm	4.7 mm	0.3293 g
FBK08A2PC5010	M2.5	10 mm	0.45 mm	1.5 mm	4.7 mm	0.3899 g
FBK08A2PC5012	M2.5	12 mm	0.45 mm	1.5 mm	4.7 mm	0.4505 g
FBK08A2PC5014	M2.5	14 mm	0.45 mm	1.5 mm	4.7 mm	0.5121 g
FBK08A2PC5016	M2.5	16 mm	0.45 mm	1.5 mm	4.7 mm	0.5727 g
FBK08A2PC5018	M2.5	18 mm	0.45 mm	1.5 mm	4.7 mm	0.6333 g
FBK08A2PC5020	M2.5	20 mm	0.45 mm	1.5 mm	4.7 mm	0.6939 g
FBK08A2PC5022	M2.5	22 mm	0.45 mm	1.5 mm	4.7 mm	0.7545 g
FBK08A2PC5024	M2.5	24 mm	0.45 mm	1.5 mm	4.7 mm	0.8158 g
FBK08A2PC5025	M2.5	25 mm	0.45 mm	1.5 mm	4.7 mm	0.8464 g
FBK08A2PC5030	M2.5	30 mm	0.45 mm	1.5 mm	4.7 mm	0.9996 g
FBK04A2P03004	M3	4 mm	0.5 mm	1.65 mm	5.6 mm	0.2929 g
FBK04A2P03005	M3	5 mm	0.5 mm	1.65 mm	5.6 mm	0.3384 g
FBK04A2P03006	M3	6 mm	0.5 mm	1.65 mm	5.6 mm	0.3828 g
FBK04A2P03008	M3	8 mm	0.5 mm	1.65 mm	5.6 mm	0.4717 g
FBK04A2P03010	M3	10 mm	0.5 mm	1.65 mm	5.6 mm	0.5606 g



Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Weight
FBK04A2P03012	M3	12 mm	0.5 mm	1.65 mm	5.6 mm	0.6494 g
FBK04A2P03014	M3	14 mm	0.5 mm	1.65 mm	5.6 mm	0.7383 g
FBK04A2P03016	M3	16 mm	0.5 mm	1.65 mm	5.6 mm	0.8282 g
FBK04A2P03018	M3	18 mm	0.5 mm	1.65 mm	5.6 mm	0.9171 g
FBK04A2P03020	M3	20 mm	0.5 mm	1.65 mm	5.6 mm	1.006 g
FBK04A2P03022	M3	22 mm	0.5 mm	1.65 mm	5.6 mm	1.091 g
FBK04A2P03025	M3	25 mm	0.5 mm	1.65 mm	5.6 mm	1.232 g
FBK04A2P03030	M3	30 mm	0.5 mm	1.65 mm	5.6 mm	1.454 g
FBK04A2P03035	M3	35 mm	0.5 mm	1.65 mm	5.6 mm	1.682 g
FBK04A2P03040	M3	40 mm	0.5 mm	1.65 mm	5.6 mm	1.909 g
FBK04A2P03045	M3	45 mm	0.5 mm	1.65 mm	5.6 mm	2.136 g
FBK04A2P03050	M3	50 mm	0.5 mm	1.65 mm	5.6 mm	2.363 g
FBK04A2P03055	M3	55 mm	0.5 mm	1.65 mm	5.6 mm	2.591 g
FBK04A2P03060	M3	60 mm	0.5 mm	1.65 mm	5.6 mm	2.818 g
FBK04A2P04005	M4	5 mm	0.7 mm	2.2 mm	7.5 mm	0.6828 g
FBK04A2P04006	M4	6 mm	0.7 mm	2.2 mm	7.5 mm	0.7615 g
FBK04A2P04008	M4	8 mm	0.7 mm	2.2 mm	7.5 mm	0.9191 g
FBK04A2P04010	M4	10 mm	0.7 mm	2.2 mm	7.5 mm	1.071 g
FBK04A2P04012	M4	12 mm	0.7 mm	2.2 mm	7.5 mm	1.232 g
FBK04A2P04014	M4	14 mm	0.7 mm	2.2 mm	7.5 mm	1.384 g
FBK04A2P04016	M4	16 mm	0.7 mm	2.2 mm	7.5 mm	1.545 g
FBK04A2P04018	M4	18 mm	0.7 mm	2.2 mm	7.5 mm	1.697 g
FBK04A2P04020	M4	20 mm	0.7 mm	2.2 mm	7.5 mm	1.858 g
FBK04A2P04022	M4	22 mm	0.7 mm	2.2 mm	7.5 mm	2.01 g
FBK04A2P04025	M4	25 mm	0.7 mm	2.2 mm	7.5 mm	2.242 g
FBK04A2P04030	M4	30 mm	0.7 mm	2.2 mm	7.5 mm	2.636 g
FBK04A2P04035	M4	35 mm	0.7 mm	2.2 mm	7.5 mm	3.03 g
FBK04A2P04040	M4	40 mm	0.7 mm	2.2 mm	7.5 mm	3.414 g
FBK04A2P04045	M4	45 mm	0.7 mm	2.2 mm	7.5 mm	3.798 g
FBK04A2P04050	M4	50 mm	0.7 mm	2.2 mm	7.5 mm	4.181 g
FBK04A2P04055	M4	55 mm	0.7 mm	2.2 mm	7.5 mm	4.565 g
FBK04A2P04060	M4	60 mm	0.7 mm	2.2 mm	7.5 mm	4.949 g
FBK04A2P04065	M4	65 mm	0.7 mm	2.2 mm	7.5 mm	5.333 g
FBK04A2P04070	M4	70 mm	0.7 mm	2.2 mm	7.5 mm	5.717 g
FBK04A2P04075	M4	75 mm	0.7 mm	2.2 mm	7.5 mm	6.1 g
FBK04A2P04080	M4	80 mm	0.7 mm	2.2 mm	7.5 mm	6.484 g
FBK04A2P04085	M4	85 mm	0.7 mm	2.2 mm	7.5 mm	6.868 g



Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Weight
FBK04A2P04090	M4	90 mm	0.7 mm	2.2 mm	7.5 mm	7.252 g
FBK04A2P04095	M4	95 mm	0.7 mm	2.2 mm	7.5 mm	7.636 g
FBK04A2P04100	M4	100 mm	0.7 mm	2.2 mm	7.5 mm	8.019 g
FBK04A2P05006	M5	6 mm	0.8 mm	2.5 mm	9.2 mm	1.222 g
FBK04A2P05008	M5	8 mm	0.8 mm	2.5 mm	9.2 mm	1.464 g
FBK04A2P05010	M5	10 mm	0.8 mm	2.5 mm	9.2 mm	1.717 g
FBK04A2P05012	M5	12 mm	0.8 mm	2.5 mm	9.2 mm	1.97 g
FBK04A2P05014	M5	14 mm	0.8 mm	2.5 mm	9.2 mm	2.212 g
FBK04A2P05016	M5	16 mm	0.8 mm	2.5 mm	9.2 mm	2.464 g
FBK04A2P05018	M5	18 mm	0.8 mm	2.5 mm	9.2 mm	2.717 g
FBK04A2P05020	M5	20 mm	0.8 mm	2.5 mm	9.2 mm	2.969 g
FBK04A2P05022	M5	22 mm	0.8 mm	2.5 mm	9.2 mm	3.212 g
FBK04A2P05025	M5	25 mm	0.8 mm	2.5 mm	9.2 mm	3.585 g
FBK04A2P05028	M5	28 mm	0.8 mm	2.5 mm	9.2 mm	3.969 g
FBK04A2P05030	M5	30 mm	0.8 mm	2.5 mm	9.2 mm	4.202 g
FBK04A2P05035	M5	35 mm	0.8 mm	2.5 mm	9.2 mm	4.697 g
FBK04A2P05040	M5	40 mm	0.8 mm	2.5 mm	9.2 mm	5.454 g
FBK04A2P05045	M5	45 mm	0.8 mm	2.5 mm	9.2 mm	6.08 g
FBK04A2P05050	M5	50 mm	0.8 mm	2.5 mm	9.2 mm	6.706 g
FBK04A2P05055	M5	55 mm	0.8 mm	2.5 mm	9.2 mm	7.333 g
FBK04A2P05060	M5	60 mm	0.8 mm	2.5 mm	9.2 mm	7.959 g
FBK04A2P05065	M5	65 mm	0.8 mm	2.5 mm	9.2 mm	8.585 g
FBK04A2P05070	M5	70 mm	0.8 mm	2.5 mm	9.2 mm	9.211 g
FBK04A2P05075	M5	75 mm	0.8 mm	2.5 mm	9.2 mm	9.837 g
FBK04A2P05080	M5	80 mm	0.8 mm	2.5 mm	9.2 mm	10.464 g
FBK04A2P05085	M5	85 mm	0.8 mm	2.5 mm	9.2 mm	11.09 g
FBK04A2P05090	M5	90 mm	0.8 mm	2.5 mm	9.2 mm	11.716 g
FBK04A2P05095	M5	95 mm	0.8 mm	2.5 mm	9.2 mm	12.342 g
FBK04A2P05100	M5	100 mm	0.8 mm	2.5 mm	9.2 mm	12.968 g
FBK04A2P06008	M6	8 mm	1 mm	3 mm	11 mm	2.212 g
FBK04A2P06010	M6	10 mm	1 mm	3 mm	11 mm	2.565 g
FBK04A2P06012	M6	12 mm	1 mm	3 mm	11 mm	2.919 g
FBK04A2P06014	M6	14 mm	1 mm	3 mm	11 mm	3.283 g
FBK04A2P06016	M6	16 mm	1 mm	3 mm	11 mm	3.636 g
FBK04A2P06018	M6	18 mm	1 mm	3 mm	11 mm	3.99 g
FBK04A2P06020	M6	20 mm	1 mm	3 mm	11 mm	4.353 g
FBK04A2P06022	M6	22 mm	1 mm	3 mm	11 mm	4.707 g



Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Weight
FBK04A2P06025	M6	25 mm	1 mm	3 mm	11 mm	5.242 g
FBK04A2P06030	M6	30 mm	1 mm	3 mm	11 mm	6.141 g
FBK04A2P06035	M6	35 mm	1 mm	3 mm	11 mm	7.03 g
FBK04A2P06040	M6	40 mm	1 mm	3 mm	11 mm	7.918 g
FBK04A2P06045	M6	45 mm	1 mm	3 mm	11 mm	8.817 g
FBK04A2P06050	M6	50 mm	1 mm	3 mm	11 mm	9.716 g
FBK04A2P06055	M6	55 mm	1 mm	3 mm	11 mm	10.615 g
FBK04A2P06060	M6	60 mm	1 mm	3 mm	11 mm	11.514 g
FBK04A2P06065	M6	65 mm	1 mm	3 mm	11 mm	12.413 g
FBK04A2P06070	M6	70 mm	1 mm	3 mm	11 mm	13.312 g
FBK04A2P06075	M6	75 mm	1 mm	3 mm	11 mm	14.211 g
FBK04A2P06080	M6	80 mm	1 mm	3 mm	11 mm	15.11 g
FBK04A2P06085	M6	85 mm	1 mm	3 mm	11 mm	16.009 g
FBK04A2P06090	M6	90 mm	1 mm	3 mm	11 mm	16.907 g
FBK04A2P06095	M6	95 mm	1 mm	3 mm	11 mm	17.806 g
FBK04A2P06100	M6	100 mm	1 mm	3 mm	11 mm	18.705 g
FBK04A2P06110	M6	110 mm	1 mm	3 mm	11 mm	20.503 g
FBK04A2P06120	M6	120 mm	1 mm	3 mm	11 mm	22.301 g
FBK04A2P06130	M6	130 mm	1 mm	3 mm	11 mm	24.099 g
FBK04A2P06140	M6	140 mm	1 mm	3 mm	11 mm	25.896 g
FBK04A2P08010	M8	10 mm	1.25 mm	4 mm	14.5 mm	5.08 g
FBK04A2P08012	M8	12 mm	1.25 mm	4 mm	14.5 mm	5.727 g
FBK04A2P08016	M8	16 mm	1.25 mm	4 mm	14.5 mm	7.009 g
FBK04A2P08020	M8	20 mm	1.25 mm	4 mm	14.5 mm	8.292 g
FBK04A2P08025	M8	25 mm	1.25 mm	4 mm	14.5 mm	9.888 g
FBK04A2P08030	M8	30 mm	1.25 mm	4 mm	14.5 mm	11.514 g
FBK04A2P08035	M8	35 mm	1.25 mm	4 mm	14.5 mm	13.13 g
FBK04A2P08040	M8	40 mm	1.25 mm	4 mm	14.5 mm	14.746 g
FBK04A2P08045	M8	45 mm	1.25 mm	4 mm	14.5 mm	16.362 g
FBK04A2P08050	M8	50 mm	1.25 mm	4 mm	14.5 mm	17.978 g
FBK04A2P08060	M8	60 mm	1.25 mm	4 mm	14.5 mm	21.21 g
FBK04A2P08070	M8	70 mm	1.25 mm	4 mm	14.5 mm	24.442 g
FBK04A2P08080	M8	80 mm	1.25 mm	4 mm	14.5 mm	27.674 g
FBK04A2P08090	M8	90 mm	1.25 mm	4 mm	14.5 mm	30.906 g
FBK04A2P08100	M8	100 mm	1.25 mm	4 mm	14.5 mm	34.138 g
FBK04A2P08110	M8	110 mm	1.25 mm	4 mm	14.5 mm	37.37 g
FBK04A2P08120	M8	120 mm	1.25 mm	4 mm	14.5 mm	40.602 g



Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Weight
FBK04A2P08130	M8	130 mm	1.25 mm	4 mm	14.5 mm	43.834 g
FBK04A2P08140	M8	140 mm	1.25 mm	4 mm	14.5 mm	47.066 g
FBK04A2P08150	M8	150 mm	1.25 mm	4 mm	14.5 mm	50.298 g
FBK04A2P10016	M10	16 mm	1.5 mm	5 mm	18 mm	11.716 g
FBK04A2P10020	M10	20 mm	1.5 mm	5 mm	18 mm	13.736 g
FBK04A2P10025	M10	25 mm	1.5 mm	5 mm	18 mm	16.261 g
FBK04A2P10030	M10	30 mm	1.5 mm	5 mm	18 mm	18.786 g
FBK04A2P10035	M10	35 mm	1.5 mm	5 mm	18 mm	21.311 g
FBK04A2P10040	M10	40 mm	1.5 mm	5 mm	18 mm	23.836 g
FBK04A2P10045	M10	45 mm	1.5 mm	5 mm	18 mm	26.361 g
FBK04A2P10050	M10	50 mm	1.5 mm	5 mm	18 mm	28.886 g
FBK04A2P10060	M10	60 mm	1.5 mm	5 mm	18 mm	34.037 g
FBK04A2P10070	M10	70 mm	1.5 mm	5 mm	18 mm	39.289 g
FBK04A2P10080	M10	80 mm	1.5 mm	5 mm	18 mm	44.541 g
FBK04A2P10090	M10	90 mm	1.5 mm	5 mm	18 mm	49.793 g
FBK04A2P10100	M10	100 mm	1.5 mm	5 mm	18 mm	55.045 g

Part numbers: 170

STANDARDS & CERTIFICATES

Standards

DIN 965 – Cross Recessed Countersunk Head Screw

ISO 7046-1 – Cross Recessed Countersunk Head Screw

