


Parallel Pin with Internal Thread DIN 7979D - Steel, Plain

Parallel Pin with Internal Thread to DIN 7979D, in the sizes, grades and finishes listed.

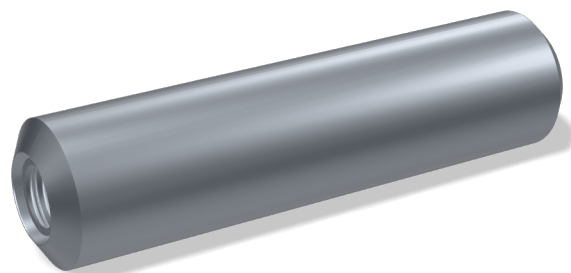

TECHNICAL DATA

General


Standard	DIN 7979D
----------	-----------

Materials & Finish

Property class / grade	Steel
------------------------	-------

Material	Steel
Surface finish	Plain

DIMENSIONS

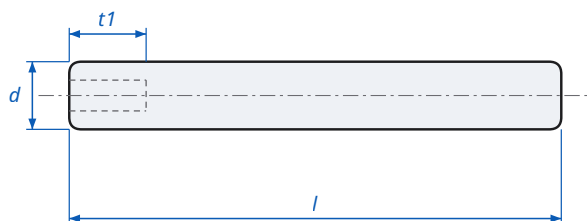

d	Nominal diameter
l	Length
t1	Internal thread depth

Parallel Pin with Internal Thread DIN 7979D - dimensions

AVAILABLE PART NUMBERS

Part number	Size (d)	Length (l)	Internal thread depth (t1)	Weight
FPP03STP04010	Ø4	10 mm	–	–
FPP03STP04012	Ø4	12 mm	–	–
FPP03STP04014	Ø4	14 mm	–	–
FPP03STP04016	Ø4	16 mm	–	–
FPP03STP04018	Ø4	18 mm	–	–
FPP03STP04020	Ø4	20 mm	–	–
FPP03STP04022	Ø4	22 mm	–	–
FPP03STP04024	Ø4	24 mm	–	–
FPP03STP04025	Ø4	25 mm	–	–
FPP03STP04026	Ø4	26 mm	–	–



Part number	Size (d)	Length (l)	Internal thread depth (t1)	Weight
FPP03STP04028	Ø4	28 mm	–	–
FPP03STP04030	Ø4	30 mm	–	–
FPP03STP04032	Ø4	32 mm	–	–
FPP03STP04036	Ø4	36 mm	–	–
FPP03STP04040	Ø4	40 mm	–	–
FPP03STP04050	Ø4	50 mm	–	–
FPP03STP04060	Ø4	60 mm	–	–
FPP03STP05010	Ø5	10 mm	–	–
FPP03STP05012	Ø5	12 mm	–	–
FPP03STP05014	Ø5	14 mm	–	–
FPP03STP05016	Ø5	16 mm	–	–
FPP03STP05018	Ø5	18 mm	–	–
FPP03STP05020	Ø5	20 mm	–	–
FPP03STP05024	Ø5	24 mm	–	–
FPP03STP05025	Ø5	25 mm	–	–
FPP03STP05028	Ø5	28 mm	–	–
FPP03STP05030	Ø5	30 mm	–	–
FPP03STP05032	Ø5	32 mm	–	–
FPP03STP05036	Ø5	36 mm	–	–
FPP03STP05040	Ø5	40 mm	–	–
FPP03STP05045	Ø5	45 mm	–	–
FPP03STP05050	Ø5	50 mm	–	–
FPP03STP05060	Ø5	60 mm	–	–
FPP03STP06010	Ø6	10 mm	6 mm	2.22 g
FPP03STP06012	Ø6	12 mm	6 mm	2.663 g
FPP03STP06014	Ø6	14 mm	6 mm	3.107 g
FPP03STP06016	Ø6	16 mm	6 mm	3.551 g
FPP03STP06018	Ø6	18 mm	6 mm	3.995 g
FPP03STP06020	Ø6	20 mm	6 mm	4.439 g
FPP03STP06022	Ø6	22 mm	6 mm	4.883 g
FPP03STP06024	Ø6	24 mm	6 mm	5.327 g
FPP03STP06025	Ø6	25 mm	6 mm	5.549 g
FPP03STP06026	Ø6	26 mm	6 mm	5.771 g
FPP03STP06028	Ø6	28 mm	6 mm	6.215 g
FPP03STP06030	Ø6	30 mm	6 mm	6.659 g
FPP03STP06032	Ø6	32 mm	6 mm	7.103 g
FPP03STP06035	Ø6	35 mm	6 mm	7.768 g



Part number	Size (d)	Length (l)	Internal thread depth (t1)	Weight
FPP03STP06036	Ø6	36 mm	6 mm	7.99 g
FPP03STP06040	Ø6	40 mm	6 mm	8.878 g
FPP03STP06045	Ø6	45 mm	6 mm	9.988 g
FPP03STP06050	Ø6	50 mm	6 mm	11.1 g
FPP03STP06055	Ø6	55 mm	6 mm	12.21 g
FPP03STP06060	Ø6	60 mm	6 mm	13.32 g
FPP03STP06070	Ø6	70 mm	6 mm	15.54 g
FPP03STP06080	Ø6	80 mm	6 mm	17.76 g
FPP03STP06090	Ø6	90 mm	6 mm	19.98 g
FPP03STP06100	Ø6	100 mm	6 mm	22.2 g
FPP03STP08010	Ø8	10 mm	8 mm	3.946 g
FPP03STP08012	Ø8	12 mm	8 mm	4.735 g
FPP03STP08016	Ø8	16 mm	8 mm	6.313 g
FPP03STP08018	Ø8	18 mm	8 mm	7.103 g
FPP03STP08020	Ø8	20 mm	8 mm	7.892 g
FPP03STP08022	Ø8	22 mm	8 mm	8.681 g
FPP03STP08024	Ø8	24 mm	8 mm	9.47 g
FPP03STP08025	Ø8	25 mm	8 mm	9.865 g
FPP03STP08026	Ø8	26 mm	8 mm	10.26 g
FPP03STP08028	Ø8	28 mm	8 mm	11.05 g
FPP03STP08030	Ø8	30 mm	8 mm	11.84 g
FPP03STP08032	Ø8	32 mm	8 mm	12.63 g
FPP03STP08035	Ø8	35 mm	8 mm	13.81 g
FPP03STP08036	Ø8	36 mm	8 mm	14.21 g
FPP03STP08040	Ø8	40 mm	8 mm	15.78 g
FPP03STP08045	Ø8	45 mm	8 mm	17.76 g
FPP03STP08050	Ø8	50 mm	8 mm	19.73 g
FPP03STP08055	Ø8	55 mm	8 mm	21.7 g
FPP03STP08060	Ø8	60 mm	8 mm	23.68 g
FPP03STP08065	Ø8	65 mm	8 mm	25.65 g
FPP03STP08070	Ø8	70 mm	8 mm	27.62 g
FPP03STP08080	Ø8	80 mm	8 mm	31.57 g
FPP03STP08090	Ø8	90 mm	8 mm	35.51 g
FPP03STP08100	Ø8	100 mm	8 mm	39.46 g
FPP03STP08110	Ø8	110 mm	8 mm	43.4 g
FPP03STP08120	Ø8	120 mm	8 mm	47.35 g
FPP03STP10016	Ø10	16 mm	10 mm	9.865 g



Part number	Size (d)	Length (l)	Internal thread depth (t1)	Weight
FPP03STP10018	Ø10	18 mm	10 mm	11.1 g
FPP03STP10020	Ø10	20 mm	10 mm	12.33 g
FPP03STP10024	Ø10	24 mm	10 mm	14.8 g
FPP03STP10028	Ø10	28 mm	10 mm	17.26 g
FPP03STP10030	Ø10	30 mm	10 mm	18.5 g
FPP03STP10032	Ø10	32 mm	10 mm	19.73 g
FPP03STP10035	Ø10	35 mm	10 mm	21.58 g
FPP03STP10036	Ø10	36 mm	10 mm	22.2 g
FPP03STP10040	Ø10	40 mm	10 mm	24.66 g
FPP03STP10045	Ø10	45 mm	10 mm	27.74 g
FPP03STP10050	Ø10	50 mm	10 mm	30.83 g
FPP03STP10055	Ø10	55 mm	10 mm	33.91 g
FPP03STP10060	Ø10	60 mm	10 mm	36.99 g
FPP03STP10065	Ø10	65 mm	10 mm	40.07 g
FPP03STP10070	Ø10	70 mm	10 mm	43.16 g
FPP03STP10080	Ø10	80 mm	10 mm	49.32 g
FPP03STP10090	Ø10	90 mm	10 mm	55.49 g
FPP03STP10100	Ø10	100 mm	10 mm	61.65 g
FPP03STP10120	Ø10	120 mm	10 mm	73.98 g
FPP03STP12016	Ø12	16 mm	10 mm	14.21 g
FPP03STP12020	Ø12	20 mm	10 mm	17.76 g
FPP03STP12024	Ø12	24 mm	10 mm	21.31 g
FPP03STP12026	Ø12	26 mm	10 mm	23.08 g
FPP03STP12028	Ø12	28 mm	10 mm	24.86 g
FPP03STP12030	Ø12	30 mm	10 mm	26.63 g
FPP03STP12032	Ø12	32 mm	10 mm	28.41 g
FPP03STP12036	Ø12	36 mm	10 mm	31.96 g
FPP03STP12040	Ø12	40 mm	10 mm	35.51 g
FPP03STP12045	Ø12	45 mm	10 mm	39.95 g
FPP03STP12050	Ø12	50 mm	10 mm	44.39 g
FPP03STP12055	Ø12	55 mm	10 mm	48.83 g
FPP03STP12060	Ø12	60 mm	10 mm	53.27 g
FPP03STP12070	Ø12	70 mm	10 mm	62.15 g
FPP03STP12080	Ø12	80 mm	10 mm	71.03 g
FPP03STP12090	Ø12	90 mm	10 mm	79.9 g
FPP03STP12100	Ø12	100 mm	10 mm	88.78 g
FPP03STP12110	Ø12	110 mm	10 mm	97.66 g



Part number	Size (d)	Length (l)	Internal thread depth (t1)	Weight
FPP03STP12120	Ø12	120 mm	10 mm	106.54 g
FPP03STP12130	Ø12	130 mm	10 mm	115.42 g
FPP03STP13024	Ø13	24 mm	–	–
FPP03STP13032	Ø13	32 mm	–	–
FPP03STP13040	Ø13	40 mm	–	–
FPP03STP13050	Ø13	50 mm	–	–
FPP03STP13060	Ø13	60 mm	–	–
FPP03STP13070	Ø13	70 mm	–	–
FPP03STP13080	Ø13	80 mm	–	–
FPP03STP13100	Ø13	100 mm	–	–
FPP03STP13120	Ø13	120 mm	–	–
FPP03STP14028	Ø14	28 mm	12 mm	33.84 g
FPP03STP14032	Ø14	32 mm	12 mm	38.67 g
FPP03STP14036	Ø14	36 mm	12 mm	43.5 g
FPP03STP14040	Ø14	40 mm	12 mm	48.34 g
FPP03STP14050	Ø14	50 mm	12 mm	60.42 g
FPP03STP14055	Ø14	55 mm	12 mm	66.46 g
FPP03STP14060	Ø14	60 mm	12 mm	72.5 g
FPP03STP14070	Ø14	70 mm	12 mm	84.59 g
FPP03STP14080	Ø14	80 mm	12 mm	96.67 g
FPP03STP14090	Ø14	90 mm	12 mm	108.76 g
FPP03STP14100	Ø14	100 mm	12 mm	120.84 g
FPP03STP14120	Ø14	120 mm	12 mm	145.01 g
FPP03STP16030	Ø16	30 mm	12 mm	47.35 g
FPP03STP16032	Ø16	32 mm	12 mm	50.51 g
FPP03STP16036	Ø16	36 mm	12 mm	56.82 g
FPP03STP16040	Ø16	40 mm	12 mm	63.13 g
FPP03STP16045	Ø16	45 mm	12 mm	71.03 g
FPP03STP16050	Ø16	50 mm	12 mm	78.92 g
FPP03STP16055	Ø16	55 mm	12 mm	86.81 g
FPP03STP16060	Ø16	60 mm	12 mm	94.7 g
FPP03STP16070	Ø16	70 mm	12 mm	110.48 g
FPP03STP16080	Ø16	80 mm	12 mm	126.27 g
FPP03STP16090	Ø16	90 mm	12 mm	142.05 g
FPP03STP16100	Ø16	100 mm	12 mm	157.83 g
FPP03STP16110	Ø16	110 mm	12 mm	173.62 g
FPP03STP16120	Ø16	120 mm	12 mm	189.4 g



Part number	Size (d)	Length (l)	Internal thread depth (t1)	Weight
FPP03STP20030	Ø20	30 mm	16 mm	73.98 g
FPP03STP20036	Ø20	36 mm	16 mm	88.78 g
FPP03STP20040	Ø20	40 mm	16 mm	98.65 g
FPP03STP20045	Ø20	45 mm	16 mm	110.98 g
FPP03STP20050	Ø20	50 mm	16 mm	123.31 g
FPP03STP20055	Ø20	55 mm	16 mm	135.64 g
FPP03STP20060	Ø20	60 mm	16 mm	147.97 g
FPP03STP20070	Ø20	70 mm	16 mm	172.63 g
FPP03STP20075	Ø20	75 mm	16 mm	184.96 g
FPP03STP20080	Ø20	80 mm	16 mm	197.29 g
FPP03STP20085	Ø20	85 mm	16 mm	209.62 g
FPP03STP20090	Ø20	90 mm	16 mm	221.95 g
FPP03STP20100	Ø20	100 mm	16 mm	246.62 g
FPP03STP20110	Ø20	110 mm	16 mm	271.28 g
FPP03STP20120	Ø20	120 mm	16 mm	295.94 g
FPP03STP24050	Ø24	50 mm	–	–
FPP03STP24060	Ø24	60 mm	–	–
FPP03STP24065	Ø24	65 mm	–	–
FPP03STP24070	Ø24	70 mm	–	–
FPP03STP24080	Ø24	80 mm	–	–
FPP03STP24090	Ø24	90 mm	–	–
FPP03STP24100	Ø24	100 mm	–	–
FPP03STP25045	Ø25	45 mm	24 mm	173.4 g
FPP03STP25050	Ø25	50 mm	24 mm	192.67 g
FPP03STP25055	Ø25	55 mm	24 mm	211.93 g
FPP03STP25060	Ø25	60 mm	24 mm	231.2 g
FPP03STP25070	Ø25	70 mm	24 mm	269.74 g
FPP03STP25080	Ø25	80 mm	24 mm	308.27 g
FPP03STP25090	Ø25	90 mm	24 mm	346.8 g
FPP03STP25100	Ø25	100 mm	24 mm	385.34 g
FPP03STP25110	Ø25	110 mm	24 mm	423.87 g
FPP03STP25120	Ø25	120 mm	24 mm	462.4 g
FPP03STP30055	Ø30	55 mm	30 mm	305.19 g
FPP03STP30060	Ø30	60 mm	30 mm	332.93 g
FPP03STP30065	Ø30	65 mm	30 mm	360.67 g
FPP03STP30070	Ø30	70 mm	30 mm	388.42 g
FPP03STP30080	Ø30	80 mm	30 mm	443.91 g



Part number	Size (d)	Length (l)	Internal thread depth (t1)	Weight
FPP03STP30090	Ø30	90 mm	30 mm	499.4 g
FPP03STP30100	Ø30	100 mm	30 mm	554.88 g
FPP03STP30110	Ø30	110 mm	30 mm	610.37 g
FPP03STP32060	Ø32	60 mm	–	–
FPP03STP32070	Ø32	70 mm	–	–
FPP03STP40070	Ø40	70 mm	30 mm	690.52 g
FPP03STP40080	Ø40	80 mm	30 mm	789.17 g
FPP03STP40090	Ø40	90 mm	30 mm	887.81 g

Part numbers: 203

STANDARDS & CERTIFICATES

Standards

DIN 7979D – Parallel Pin with Internal Thread

