


Hex Nut DIN 934 / ISO 4032 - Stainless steel A2-70, Lubricated

Hex Nut to DIN 934 / ISO 4032, in the sizes, grades and finishes listed.

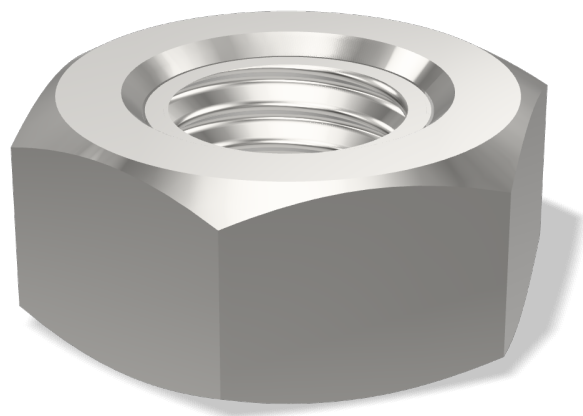

TECHNICAL DATA

General

Standard	ISO 4032
----------	----------



Dimensions

Thread form	Metric ISO thread
-------------	-------------------

Materials & Finish

Property class / grade	A2-70
Material	Stainless steel
Surface finish	Lubricated

DIMENSIONS



- s Width across flats (WAF)
- e Width across corners
- m Nut height

Hex Nut DIN 934 / ISO 4032 - dimensions

AVAILABLE PART NUMBERS

Part number	Size	Thread pitch	Width across flats (s)	Width across corners (e)	Nut height (m)	Weight
FNH08S2W06000	M6	1 mm	10 mm	11.05 mm	5.2 mm	2.525 g
FNH08S2W08000	M8	1.25 mm	13 mm	14.38 mm	6.8 mm	5.252 g
FNH08S2W10000	M10	1.5 mm	16 mm	17.77 mm	8.4 mm	11.716 g
FNH08S2W12000	M12	1.75 mm	18 mm	20.03 mm	10.8 mm	17.473 g
FNH08S2W16000	M16	2 mm	24 mm	26.75 mm	14.8 mm	33.633 g
FNH08S2W20000	M20	2.5 mm	30 mm	32.95 mm	18 mm	65.044 g
FNH08S2W24000	M24	3 mm	36 mm	39.55 mm	21.5 mm	111.1 g





Part numbers: 7

STANDARDS & CERTIFICATES

Standards

DIN 934 – Hex Nut

ISO 4032 – Hex Nut

