


Retaining Ring for Bores DIN 472 - Stainless 1.4532, Plain

Retaining Ring for Bores to DIN 472, in the sizes, grades and finishes listed.

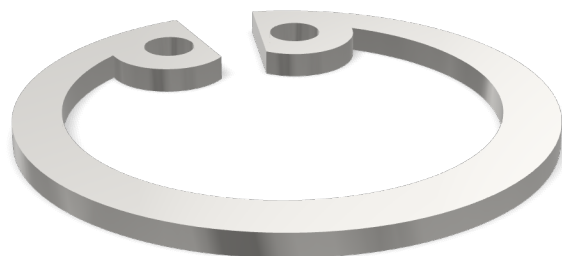

TECHNICAL DATA

General


Standard	DIN 472
----------	---------

Materials & Finish

Property class / grade	Stainless 1.4532
------------------------	------------------

Material	Stainless steel
Surface finish	Plain

DIMENSIONS

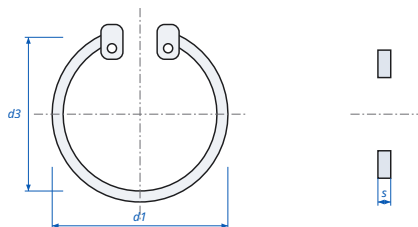

Retaining Ring for Bores DIN 472 - dimensions

s	Thickness
d1	Bore diameter
d3	Ring outer diameter (free)

AVAILABLE PART NUMBERS

Part number	Size (d1)	Thickness (s)	Ring diameter (free) (d3)	Weight
FCB01S5P09000	Ø9	0.8 mm	9.8 mm	0.1515 g
FCB01S5P10000	Ø10	1 mm	10.8 mm	0.1818 g
FCB01S5P11000	Ø11	1 mm	11.8 mm	0.3131 g
FCB01S5P12000	Ø12	1 mm	13 mm	0.3737 g
FCB01S5P13000	Ø13	1 mm	14.1 mm	0.4242 g
FCB01S5P14000	Ø14	1 mm	15.1 mm	0.5252 g
FCB01S5P15000	Ø15	1 mm	16.2 mm	0.5656 g
FCB01S5P16000	Ø16	1 mm	17.3 mm	0.606 g
FCB01S5P17000	Ø17	1 mm	18.3 mm	0.6565 g
FCB01S5P18000	Ø18	1 mm	19.5 mm	0.7474 g



Part number	Size (d1)	Thickness (s)	Ring diameter (free) (d3)	Weight
FCB01S5P19000	Ø19	1 mm	20.5 mm	0.8383 g
FCB01S5P20000	Ø20	1 mm	21.5 mm	0.909 g
FCB01S5P21000	Ø21	1 mm	22.5 mm	1.01 g
FCB01S5P22000	Ø22	1 mm	23.5 mm	1.111 g
FCB01S5P23000	Ø23	–	–	–
FCB01S5P24000	Ø24	1.2 mm	25.9 mm	1.434 g
FCB01S5P25000	Ø25	1.2 mm	26.9 mm	1.515 g
FCB01S5P26000	Ø26	1.2 mm	27.9 mm	1.616 g
FCB01S5P27000	Ø27	–	–	–
FCB01S5P28000	Ø28	1.2 mm	30.1 mm	1.818 g
FCB01S5P29000	Ø29	–	–	–
FCB01S5P30000	Ø30	1.2 mm	32.1 mm	2.081 g
FCB01S5P31000	Ø31	1.2 mm	33.4 mm	2.121 g
FCB01S5P32000	Ø32	1.2 mm	34.4 mm	2.232 g
FCB01S5P33000	Ø33	–	–	–
FCB01S5P34000	Ø34	1.5 mm	36.5 mm	3.232 g
FCB01S5P35000	Ø35	1.5 mm	37.8 mm	3.575 g
FCB01S5P36000	Ø36	1.5 mm	38.8 mm	3.737 g
FCB01S5P37000	Ø37	1.5 mm	39.8 mm	3.777 g
FCB01S5P38000	Ø38	1.5 mm	40.8 mm	3.939 g
FCB01S5P39000	Ø39	–	–	–
FCB01S5P40000	Ø40	1.75 mm	43.5 mm	4.747 g

Part numbers: 32

STANDARDS & CERTIFICATES

Standards

DIN 472 – Retaining Ring for Bores

