


Slotted Spring Pin Light Duty DIN 7346 - Steel, Plain

Slotted Spring Pin Light Duty to DIN 7346, in the sizes, grades and finishes listed.

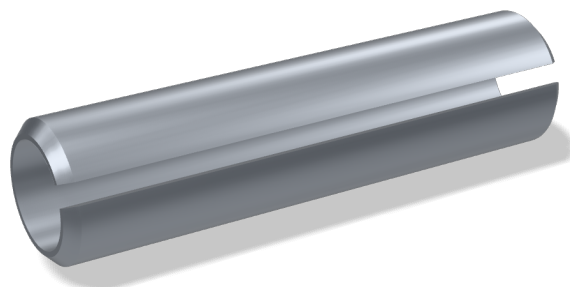

TECHNICAL DATA

General



Standard	DIN 7346
----------	----------

Materials & Finish

Property class / grade	Steel
------------------------	-------

Material	Steel
Surface finish	Plain

DIMENSIONS

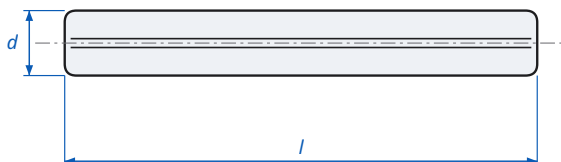

d	Nominal diameter
l	Length
s	Wall thickness
d1	Outer diameter before fitting

Slotted Spring Pin Light Duty DIN 7346 - dimensions

AVAILABLE PART NUMBERS

Part number	Size (d)	Length (l)	Wall thickness (s)	Weight
FPS04STP02005	Ø2	5 mm	0.2 mm	0.0422 g
FPS04STP02006	Ø2	6 mm	0.2 mm	0.0506 g
FPS04STP02008	Ø2	8 mm	0.2 mm	0.0675 g
FPS04STP02010	Ø2	10 mm	0.2 mm	0.0843 g
FPS04STP02012	Ø2	12 mm	0.2 mm	0.1012 g
FPS04STP02014	Ø2	14 mm	0.2 mm	0.1181 g
FPS04STP02016	Ø2	16 mm	0.2 mm	0.1349 g
FPS04STP02018	Ø2	18 mm	0.2 mm	0.1518 g
FPS04STP02020	Ø2	20 mm	0.2 mm	0.1687 g
FPS04STP02022	Ø2	22 mm	0.2 mm	0.1856 g
FPS04STP02024	Ø2	24 mm	0.2 mm	0.2024 g



Part number	Size (d)	Length (l)	Wall thickness (s)	Weight
FPS04STP02030	Ø2	30 mm	0.2 mm	0.253 g
FPS04STPC5005	Ø2.5	5 mm	0.25 mm	0.0659 g
FPS04STPC5006	Ø2.5	6 mm	0.25 mm	0.0791 g
FPS04STPC5008	Ø2.5	8 mm	0.25 mm	0.1054 g
FPS04STPC5010	Ø2.5	10 mm	0.25 mm	0.1318 g
FPS04STPC5012	Ø2.5	12 mm	0.25 mm	0.1581 g
FPS04STPC5014	Ø2.5	14 mm	0.25 mm	0.1845 g
FPS04STPC5016	Ø2.5	16 mm	0.25 mm	0.2109 g
FPS04STPC5018	Ø2.5	18 mm	0.25 mm	0.2372 g
FPS04STPC5020	Ø2.5	20 mm	0.25 mm	0.2636 g
FPS04STPC5024	Ø2.5	24 mm	0.25 mm	0.3163 g
FPS04STPC5026	Ø2.5	26 mm	0.25 mm	0.3426 g
FPS04STPC5030	Ø2.5	30 mm	0.25 mm	0.3954 g
FPS04STP03004	Ø3	4 mm	0.3 mm	0.0759 g
FPS04STP03005	Ø3	5 mm	0.3 mm	0.0949 g
FPS04STP03006	Ø3	6 mm	0.3 mm	0.1139 g
FPS04STP03008	Ø3	8 mm	0.3 mm	0.1518 g
FPS04STP03010	Ø3	10 mm	0.3 mm	0.1898 g
FPS04STP03012	Ø3	12 mm	0.3 mm	0.2277 g
FPS04STP03014	Ø3	14 mm	0.3 mm	0.2657 g
FPS04STP03016	Ø3	16 mm	0.3 mm	0.3036 g
FPS04STP03018	Ø3	18 mm	0.3 mm	0.3416 g
FPS04STP03022	Ø3	22 mm	0.3 mm	0.4175 g
FPS04STP03024	Ø3	24 mm	0.3 mm	0.4554 g
FPS04STP03026	Ø3	26 mm	0.3 mm	0.4934 g
FPS04STP03028	Ø3	28 mm	0.3 mm	0.5314 g
FPS04STP03030	Ø3	30 mm	0.3 mm	0.5693 g
FPS04STP03032	Ø3	32 mm	0.3 mm	0.6073 g
FPS04STP03036	Ø3	36 mm	0.3 mm	0.6832 g
FPS04STP03040	Ø3	40 mm	0.3 mm	0.7591 g
FPS04STP04006	Ø4	6 mm	0.5 mm	0.246 g
FPS04STP04008	Ø4	8 mm	0.5 mm	0.328 g
FPS04STP04010	Ø4	10 mm	0.5 mm	0.41 g
FPS04STP04012	Ø4	12 mm	0.5 mm	0.492 g
FPS04STP04014	Ø4	14 mm	0.5 mm	0.574 g
FPS04STP04016	Ø4	16 mm	0.5 mm	0.656 g
FPS04STP04018	Ø4	18 mm	0.5 mm	0.738 g



Part number	Size (d)	Length (l)	Wall thickness (s)	Weight
FPS04STP04020	Ø4	20 mm	0.5 mm	0.82 g
FPS04STP04022	Ø4	22 mm	0.5 mm	0.902 g
FPS04STP04024	Ø4	24 mm	0.5 mm	0.984 g
FPS04STP04026	Ø4	26 mm	0.5 mm	1.066 g
FPS04STP04028	Ø4	28 mm	0.5 mm	1.148 g
FPS04STP04030	Ø4	30 mm	0.5 mm	1.23 g
FPS04STP04032	Ø4	32 mm	0.5 mm	1.312 g
FPS04STP04036	Ø4	36 mm	0.5 mm	1.476 g
FPS04STP04040	Ø4	40 mm	0.5 mm	1.64 g
FPS04STP04045	Ø4	45 mm	0.5 mm	1.845 g
FPS04STP04050	Ø4	50 mm	0.5 mm	2.05 g
FPS04STP05005	Ø5	5 mm	0.5 mm	0.2636 g
FPS04STP05006	Ø5	6 mm	0.5 mm	0.3163 g
FPS04STP05008	Ø5	8 mm	0.5 mm	0.4217 g
FPS04STP05012	Ø5	12 mm	0.5 mm	0.6326 g
FPS04STP05014	Ø5	14 mm	0.5 mm	0.738 g
FPS04STP05016	Ø5	16 mm	0.5 mm	0.8434 g
FPS04STP05018	Ø5	18 mm	0.5 mm	0.9489 g
FPS04STP05020	Ø5	20 mm	0.5 mm	1.054 g
FPS04STP05022	Ø5	22 mm	0.5 mm	1.16 g
FPS04STP05024	Ø5	24 mm	0.5 mm	1.265 g
FPS04STP05026	Ø5	26 mm	0.5 mm	1.371 g
FPS04STP05028	Ø5	28 mm	0.5 mm	1.476 g
FPS04STP05030	Ø5	30 mm	0.5 mm	1.581 g
FPS04STP05032	Ø5	32 mm	0.5 mm	1.687 g
FPS04STP05036	Ø5	36 mm	0.5 mm	1.898 g
FPS04STP05040	Ø5	40 mm	0.5 mm	2.109 g
FPS04STP05045	Ø5	45 mm	0.5 mm	2.372 g
FPS04STP05050	Ø5	50 mm	0.5 mm	2.636 g
FPS04STP05060	Ø5	60 mm	0.5 mm	3.163 g
FPS04STP05070	Ø5	70 mm	0.5 mm	3.69 g
FPS04STP05080	Ø5	80 mm	0.5 mm	4.217 g
FPS04STP06010	Ø6	10 mm	0.75 mm	0.9225 g
FPS04STP06012	Ø6	12 mm	0.75 mm	1.107 g
FPS04STP06014	Ø6	14 mm	0.75 mm	1.291 g
FPS04STP06016	Ø6	16 mm	0.75 mm	1.476 g
FPS04STP06018	Ø6	18 mm	0.75 mm	1.66 g



Part number	Size (d)	Length (l)	Wall thickness (s)	Weight
FPS04STP06020	Ø6	20 mm	0.75 mm	1.845 g
FPS04STP06022	Ø6	22 mm	0.75 mm	2.029 g
FPS04STP06024	Ø6	24 mm	0.75 mm	2.214 g
FPS04STP06026	Ø6	26 mm	0.75 mm	2.398 g
FPS04STP06028	Ø6	28 mm	0.75 mm	2.583 g
FPS04STP06030	Ø6	30 mm	0.75 mm	2.767 g
FPS04STP06032	Ø6	32 mm	0.75 mm	2.952 g
FPS04STP06036	Ø6	36 mm	0.75 mm	3.321 g
FPS04STP06040	Ø6	40 mm	0.75 mm	3.69 g
FPS04STP06045	Ø6	45 mm	0.75 mm	4.151 g
FPS04STP06050	Ø6	50 mm	0.75 mm	4.612 g
FPS04STP06055	Ø6	55 mm	0.75 mm	5.074 g
FPS04STP06060	Ø6	60 mm	0.75 mm	5.535 g
FPS04STP06070	Ø6	70 mm	0.75 mm	6.457 g
FPS04STP06080	Ø6	80 mm	0.75 mm	7.38 g
FPS04STP06100	Ø6	100 mm	0.75 mm	9.225 g
FPS04STP07012	Ø7	12 mm	0.75 mm	1.318 g
FPS04STP10010	Ø10	10 mm	1 mm	2.109 g
FPS04STP10012	Ø10	12 mm	1 mm	2.53 g
FPS04STP10014	Ø10	14 mm	1 mm	2.952 g
FPS04STP10016	Ø10	16 mm	1 mm	3.374 g
FPS04STP10020	Ø10	20 mm	1 mm	4.217 g
FPS04STP10022	Ø10	22 mm	1 mm	4.639 g
FPS04STP10024	Ø10	24 mm	1 mm	5.061 g
FPS04STP10026	Ø10	26 mm	1 mm	5.482 g
FPS04STP10030	Ø10	30 mm	1 mm	6.326 g
FPS04STP10036	Ø10	36 mm	1 mm	7.591 g
FPS04STP10040	Ø10	40 mm	1 mm	8.434 g
FPS04STP10045	Ø10	45 mm	1 mm	9.489 g
FPS04STP10050	Ø10	50 mm	1 mm	10.54 g
FPS04STP10060	Ø10	60 mm	1 mm	12.65 g
FPS04STP10070	Ø10	70 mm	1 mm	14.76 g
FPS04STP10080	Ø10	80 mm	1 mm	16.87 g
FPS04STP10090	Ø10	90 mm	1 mm	18.98 g
FPS04STP10100	Ø10	100 mm	1 mm	21.09 g
FPS04STP12010	Ø12	10 mm	1 mm	2.577 g
FPS04STP12016	Ø12	16 mm	1 mm	4.123 g



Part number	Size (d)	Length (l)	Wall thickness (s)	Weight
FPS04STP12020	Ø12	20 mm	1 mm	5.154 g
FPS04STP12024	Ø12	24 mm	1 mm	6.185 g
FPS04STP12026	Ø12	26 mm	1 mm	6.701 g
FPS04STP12028	Ø12	28 mm	1 mm	7.216 g
FPS04STP12030	Ø12	30 mm	1 mm	7.731 g
FPS04STP12032	Ø12	32 mm	1 mm	8.247 g
FPS04STP12036	Ø12	36 mm	1 mm	9.278 g
FPS04STP12040	Ø12	40 mm	1 mm	10.31 g
FPS04STP12045	Ø12	45 mm	1 mm	11.6 g
FPS04STP12050	Ø12	50 mm	1 mm	12.89 g
FPS04STP12055	Ø12	55 mm	1 mm	14.17 g
FPS04STP12060	Ø12	60 mm	1 mm	15.46 g
FPS04STP12065	Ø12	65 mm	1 mm	16.75 g
FPS04STP12070	Ø12	70 mm	1 mm	18.04 g
FPS04STP12080	Ø12	80 mm	1 mm	20.62 g
FPS04STP12100	Ø12	100 mm	1 mm	25.77 g
FPS04STP13010	Ø13	10 mm	1.25 mm	3.441 g
FPS04STP13012	Ø13	12 mm	1.25 mm	4.129 g
FPS04STP13014	Ø13	14 mm	1.25 mm	4.817 g
FPS04STP13016	Ø13	16 mm	1.25 mm	5.506 g
FPS04STP13020	Ø13	20 mm	1.25 mm	6.882 g
FPS04STP13022	Ø13	22 mm	1.25 mm	7.57 g
FPS04STP13024	Ø13	24 mm	1.25 mm	8.259 g
FPS04STP13026	Ø13	26 mm	1.25 mm	8.947 g
FPS04STP13028	Ø13	28 mm	1.25 mm	9.635 g
FPS04STP13030	Ø13	30 mm	1.25 mm	10.32 g
FPS04STP13036	Ø13	36 mm	1.25 mm	12.39 g
FPS04STP13040	Ø13	40 mm	1.25 mm	13.76 g
FPS04STP13050	Ø13	50 mm	1.25 mm	17.21 g
FPS04STP13070	Ø13	70 mm	1.25 mm	24.09 g
FPS04STP16010	Ø16	10 mm	1.5 mm	5.096 g
FPS04STP16012	Ø16	12 mm	1.5 mm	6.115 g
FPS04STP16014	Ø16	14 mm	1.5 mm	7.134 g
FPS04STP16016	Ø16	16 mm	1.5 mm	8.153 g
FPS04STP16018	Ø16	18 mm	1.5 mm	9.172 g
FPS04STP16020	Ø16	20 mm	1.5 mm	10.19 g
FPS04STP16022	Ø16	22 mm	1.5 mm	11.21 g



Part number	Size (d)	Length (l)	Wall thickness (s)	Weight
FPS04STP16024	Ø16	24 mm	1.5 mm	12.23 g
FPS04STP16026	Ø16	26 mm	1.5 mm	13.25 g
FPS04STP16028	Ø16	28 mm	1.5 mm	14.27 g
FPS04STP16030	Ø16	30 mm	1.5 mm	15.29 g
FPS04STP16032	Ø16	32 mm	1.5 mm	16.31 g
FPS04STP16036	Ø16	36 mm	1.5 mm	18.34 g
FPS04STP16040	Ø16	40 mm	1.5 mm	20.38 g
FPS04STP16045	Ø16	45 mm	1.5 mm	22.93 g
FPS04STP16050	Ø16	50 mm	1.5 mm	25.48 g
FPS04STP16055	Ø16	55 mm	1.5 mm	28.03 g
FPS04STP16060	Ø16	60 mm	1.5 mm	30.57 g
FPS04STP16070	Ø16	70 mm	1.5 mm	35.67 g
FPS04STP16120	Ø16	120 mm	1.5 mm	61.15 g
FPS04STP20055	Ø20	55 mm	2 mm	46.39 g
FPS04STP21030	Ø21	30 mm	2 mm	26.71 g
FPS04STP21036	Ø21	36 mm	2 mm	32.05 g
FPS04STP21040	Ø21	40 mm	2 mm	35.61 g
FPS04STP21045	Ø21	45 mm	2 mm	40.06 g
FPS04STP21050	Ø21	50 mm	2 mm	44.51 g
FPS04STP21060	Ø21	60 mm	2 mm	53.42 g
FPS04STP21085	Ø21	85 mm	2 mm	75.67 g
FPS04STP30030	Ø30	30 mm	2.5 mm	48.32 g

Part numbers: 181

STANDARDS & CERTIFICATES

Standards

DIN 7346 – Slotted Spring Pin Light Duty

