


Hex Socket Screw Plug with Collar DIN 908 - Nylon PA 6.6, Plain

Hex Socket Screw Plug with Collar to DIN 908, in the sizes, grades and finishes listed.

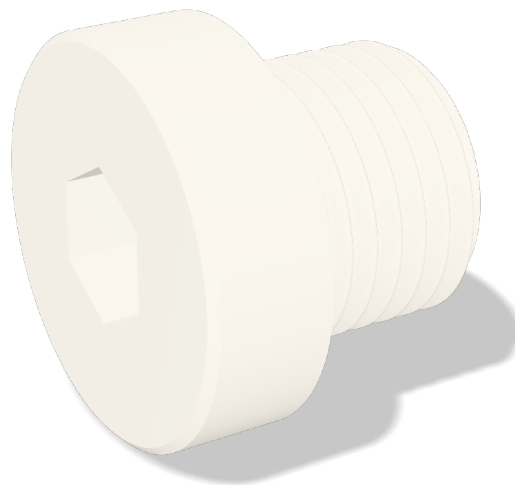

TECHNICAL DATA

General


Standard	DIN 908
----------	---------

Materials & Finish

Drive type	Hexagon socket
------------	----------------

Property class / grade	Nylon PA 6.6
Material	Nylon (PA)
Surface finish	Plain

DIMENSIONS

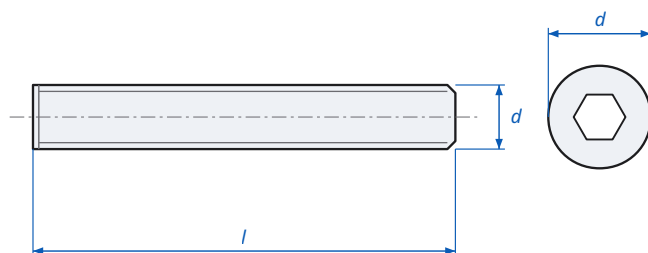

d Thread size

l Length

Hex Socket Screw Plug with Collar DIN 908 - dimensions

AVAILABLE PART NUMBERS

Part number	Size (d)	Thread pitch	Hex key size	Weight
FXS01PAPL0000	G 1	–	–	–
FXS01PAPL1000	G 1-1/2	–	–	–
FXS01PAPL2000	G 1-1/4	–	–	–
FXS01PAPL4000	G 1-3/4	–	32 mm	–
FXS01PAPL5000	G 1/2	–	10 mm	–



Part number	Size (d)	Thread pitch	Hex key size	Weight
FXS01PAPL6000	G 1/4	–	6 mm	–
FXS01PAPL7000	G 1/8	–	–	–
FXS01PAPL8000	G 2	–	–	–
FXS01PAPL9000	G 3/4	–	–	–
FXS01PAPN0000	G 3/8	–	8 mm	–
FXS01PAPN1000	G 5/8	–	–	–
FXS01PAPN2000	M8x1	1 mm	–	–
FXS01PAPN3000	M10x1	1 mm	–	–
FXS01PAPN4000	M12x1.5	1.5 mm	6 mm	1.639 g
FXS01PAPN5000	M14x1.5	1.5 mm	6 mm	2.32 g
FXS01PAPN6000	M16x1.5	1.5 mm	8 mm	2.755 g
FXS01PAPN7000	M18x1.5	1.5 mm	8 mm	4.103 g
FXS01PAPN8000	M20x1.5	1.5 mm	10 mm	5.438 g
FXS01PAPN9000	M22x1.5	1.5 mm	10 mm	6.887 g
FXS01PAPP0000	M24x1.5	1.5 mm	12 mm	7.757 g
FXS01PAPR7000	M26x1.5	1.5 mm	12 mm	9.961 g
FXS01PAPP1000	M27x2	2 mm	–	–
FXS01PAPP2000	M30x1.5	1.5 mm	17 mm	12.18 g
FXS01PAPP3000	M30x2	2 mm	17 mm	12.18 g
FXS01PAPP4000	M33x2	2 mm	–	–
FXS01PAPP5000	M36x1.5	1.5 mm	19 mm	19.43 g
FXS01PAPP7000	M39x2	2 mm	19 mm	23.635 g
FXS01PAPP8000	M42x1.5	1.5 mm	–	–
FXS01PAPP9000	M42x2	2 mm	–	–
FXS01PAPQ3000	M48x2	2 mm	–	–
FXS01PAPQ5000	M52x2	2 mm	24 mm	43.79 g
FXS01PAPQ6000	M56x2	2 mm	32 mm	55.97 g
FXS01PAPQ7000	M60x2	2 mm	–	–
FXS01PAPQ8000	M64x2	2 mm	32 mm	76.85 g

Part numbers: 34

STANDARDS & CERTIFICATES

Standards

DIN 908 – Hex Socket Screw Plug with Collar

