


Low Head Socket Cap Screw DIN 7984 - Stainless steel A4-70, Plain

Low Head Socket Cap Screw to DIN 7984, in the sizes, grades and finishes listed.

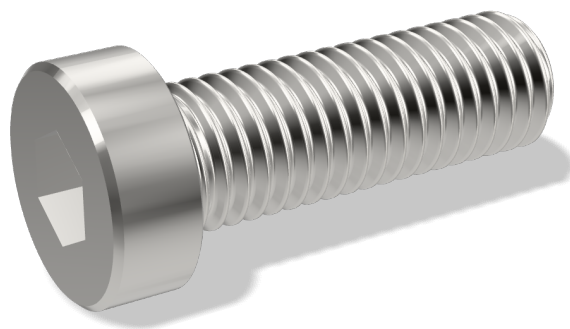

TECHNICAL DATA

General


Standard	DIN 7984
----------	----------

Materials & Finish

Head type	Socket cap
Drive type	Hexagon socket

Property class / grade	A4-70
Material	Stainless steel
Surface finish	Plain

DIMENSIONS

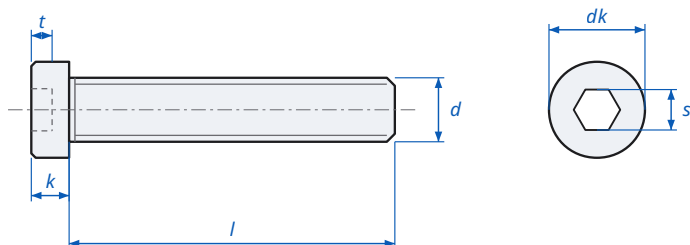

d	Thread diameter
l	Length
k	Head height
dk	Head diameter
s	Hex key size
t	Socket depth

Low Head Socket Cap Screw DIN 7984 - dimensions

AVAILABLE PART NUMBERS

Part number	Size (d)	Length (l)	Thread pitch	Hex key size (s)	Head height (k)	Head diameter (dk)	Socket depth (t)	Weight
FBS02S4P03003	M3	3 mm	0.5 mm	2 mm	2 mm	5.5 mm	1.5 mm	0.4733 g
FBS02S4P03004	M3	4 mm	0.5 mm	2 mm	2 mm	5.5 mm	1.5 mm	0.5179 g
FBS02S4P03005	M3	5 mm	0.5 mm	2 mm	2 mm	5.5 mm	1.5 mm	0.5625 g
FBS02S4P03006	M3	6 mm	0.5 mm	2 mm	2 mm	5.5 mm	1.5 mm	0.607 g
FBS02S4P03008	M3	8 mm	0.5 mm	2 mm	2 mm	5.5 mm	1.5 mm	0.6961 g
FBS02S4P03010	M3	10 mm	0.5 mm	2 mm	2 mm	5.5 mm	1.5 mm	0.7853 g
FBS02S4P03012	M3	12 mm	0.5 mm	2 mm	2 mm	5.5 mm	1.5 mm	0.8744 g
FBS02S4P03014	M3	14 mm	0.5 mm	2 mm	2 mm	5.5 mm	1.5 mm	0.9634 g



Part number	Size (d)	Length (l)	Thread pitch	Hex key size (s)	Head height (k)	Head diameter (dk)	Socket depth (t)	Weight
FBS02S4P03016	M3	16 mm	0.5 mm	2 mm	2 mm	5.5 mm	1.5 mm	1.052 g
FBS02S4P03018	M3	18 mm	0.5 mm	2 mm	2 mm	5.5 mm	1.5 mm	1.141 g
FBS02S4P03020	M3	20 mm	0.5 mm	2 mm	2 mm	5.5 mm	1.5 mm	1.231 g
FBS02S4P03022	M3	22 mm	0.5 mm	2 mm	2 mm	5.5 mm	1.5 mm	1.32 g
FBS02S4P03025	M3	25 mm	0.5 mm	2 mm	2 mm	5.5 mm	1.5 mm	1.453 g
FBS02S4P03030	M3	30 mm	0.5 mm	2 mm	2 mm	5.5 mm	1.5 mm	1.677 g
FBS02S4P03035	M3	35 mm	0.5 mm	2 mm	2 mm	5.5 mm	1.5 mm	1.899 g
FBS02S4P03040	M3	40 mm	0.5 mm	2 mm	2 mm	5.5 mm	1.5 mm	2.122 g
FBS02S4P03045	M3	45 mm	0.5 mm	2 mm	2 mm	5.5 mm	1.5 mm	2.345 g
FBS02S4P03050	M3	50 mm	0.5 mm	2 mm	2 mm	5.5 mm	1.5 mm	2.567 g
FBS02S4P04004	M4	4 mm	0.7 mm	2.5 mm	2.8 mm	7 mm	2.3 mm	0.707 g
FBS02S4P04005	M4	5 mm	0.7 mm	2.5 mm	2.8 mm	7 mm	2.3 mm	0.808 g
FBS02S4P04006	M4	6 mm	0.7 mm	2.5 mm	2.8 mm	7 mm	2.3 mm	0.909 g
FBS02S4P04008	M4	8 mm	0.7 mm	2.5 mm	2.8 mm	7 mm	2.3 mm	1.111 g
FBS02S4P04010	M4	10 mm	0.7 mm	2.5 mm	2.8 mm	7 mm	2.3 mm	1.313 g
FBS02S4P04012	M4	12 mm	0.7 mm	2.5 mm	2.8 mm	7 mm	2.3 mm	1.515 g
FBS02S4P04014	M4	14 mm	0.7 mm	2.5 mm	2.8 mm	7 mm	2.3 mm	1.717 g
FBS02S4P04016	M4	16 mm	0.7 mm	2.5 mm	2.8 mm	7 mm	2.3 mm	1.919 g
FBS02S4P04018	M4	18 mm	0.7 mm	2.5 mm	2.8 mm	7 mm	2.3 mm	2.121 g
FBS02S4P04020	M4	20 mm	0.7 mm	2.5 mm	2.8 mm	7 mm	2.3 mm	2.323 g
FBS02S4P04022	M4	22 mm	0.7 mm	2.5 mm	2.8 mm	7 mm	2.3 mm	2.485 g
FBS02S4P04025	M4	25 mm	0.7 mm	2.5 mm	2.8 mm	7 mm	2.3 mm	2.727 g
FBS02S4P04030	M4	30 mm	0.7 mm	2.5 mm	2.8 mm	7 mm	2.3 mm	3.232 g
FBS02S4P04035	M4	35 mm	0.7 mm	2.5 mm	2.8 mm	7 mm	2.3 mm	3.737 g
FBS02S4P04040	M4	40 mm	0.7 mm	2.5 mm	2.8 mm	7 mm	2.3 mm	4.242 g
FBS02S4P04045	M4	45 mm	0.7 mm	2.5 mm	2.8 mm	7 mm	2.3 mm	4.747 g
FBS02S4P04050	M4	50 mm	0.7 mm	2.5 mm	2.8 mm	7 mm	2.3 mm	5.252 g
FBS02S4P04055	M4	55 mm	0.7 mm	2.5 mm	2.8 mm	7 mm	2.3 mm	5.757 g
FBS02S4P04060	M4	60 mm	0.7 mm	2.5 mm	2.8 mm	7 mm	2.3 mm	6.262 g
FBS02S4P05005	M5	5 mm	0.8 mm	3 mm	3.5 mm	8.5 mm	2.7 mm	1.464 g
FBS02S4P05006	M5	6 mm	0.8 mm	3 mm	3.5 mm	8.5 mm	2.7 mm	1.616 g
FBS02S4P05008	M5	8 mm	0.8 mm	3 mm	3.5 mm	8.5 mm	2.7 mm	1.919 g
FBS02S4P05010	M5	10 mm	0.8 mm	3 mm	3.5 mm	8.5 mm	2.7 mm	2.222 g
FBS02S4P05012	M5	12 mm	0.8 mm	3 mm	3.5 mm	8.5 mm	2.7 mm	2.525 g
FBS02S4P05014	M5	14 mm	0.8 mm	3 mm	3.5 mm	8.5 mm	2.7 mm	2.828 g
FBS02S4P05016	M5	16 mm	0.8 mm	3 mm	3.5 mm	8.5 mm	2.7 mm	3.131 g
FBS02S4P05018	M5	18 mm	0.8 mm	3 mm	3.5 mm	8.5 mm	2.7 mm	3.434 g



Part number	Size (d)	Length (l)	Thread pitch	Hex key size (s)	Head height (k)	Head diameter (dk)	Socket depth (t)	Weight
FBS02S4P05020	M5	20 mm	0.8 mm	3 mm	3.5 mm	8.5 mm	2.7 mm	3.737 g
FBS02S4P05022	M5	22 mm	0.8 mm	3 mm	3.5 mm	8.5 mm	2.7 mm	4.02 g
FBS02S4P05025	M5	25 mm	0.8 mm	3 mm	3.5 mm	8.5 mm	2.7 mm	4.444 g
FBS02S4P05030	M5	30 mm	0.8 mm	3 mm	3.5 mm	8.5 mm	2.7 mm	5.151 g
FBS02S4P05035	M5	35 mm	0.8 mm	3 mm	3.5 mm	8.5 mm	2.7 mm	5.858 g
FBS02S4P05040	M5	40 mm	0.8 mm	3 mm	3.5 mm	8.5 mm	2.7 mm	6.666 g
FBS02S4P05045	M5	45 mm	0.8 mm	3 mm	3.5 mm	8.5 mm	2.7 mm	7.019 g
FBS02S4P05050	M5	50 mm	0.8 mm	3 mm	3.5 mm	8.5 mm	2.7 mm	7.373 g
FBS02S4P05055	M5	55 mm	0.8 mm	3 mm	3.5 mm	8.5 mm	2.7 mm	8.232 g
FBS02S4P05060	M5	60 mm	0.8 mm	3 mm	3.5 mm	8.5 mm	2.7 mm	9.09 g
FBS02S4P05065	M5	65 mm	0.8 mm	3 mm	3.5 mm	8.5 mm	2.7 mm	9.948 g
FBS02S4P05070	M5	70 mm	0.8 mm	3 mm	3.5 mm	8.5 mm	2.7 mm	10.807 g
FBS02S4P05075	M5	75 mm	0.8 mm	3 mm	3.5 mm	8.5 mm	2.7 mm	11.666 g
FBS02S4P05080	M5	80 mm	0.8 mm	3 mm	3.5 mm	8.5 mm	2.7 mm	12.524 g
FBS02S4P06006	M6	6 mm	1 mm	4 mm	4 mm	10 mm	3 mm	3.03 g
FBS02S4P06008	M6	8 mm	1 mm	4 mm	4 mm	10 mm	3 mm	3.333 g
FBS02S4P06010	M6	10 mm	1 mm	4 mm	4 mm	10 mm	3 mm	3.636 g
FBS02S4P06012	M6	12 mm	1 mm	4 mm	4 mm	10 mm	3 mm	3.939 g
FBS02S4P06014	M6	14 mm	1 mm	4 mm	4 mm	10 mm	3 mm	4.242 g
FBS02S4P06016	M6	16 mm	1 mm	4 mm	4 mm	10 mm	3 mm	4.545 g
FBS02S4P06018	M6	18 mm	1 mm	4 mm	4 mm	10 mm	3 mm	4.898 g
FBS02S4P06020	M6	20 mm	1 mm	4 mm	4 mm	10 mm	3 mm	5.252 g
FBS02S4P06022	M6	22 mm	1 mm	4 mm	4 mm	10 mm	3 mm	5.656 g
FBS02S4P06025	M6	25 mm	1 mm	4 mm	4 mm	10 mm	3 mm	6.262 g
FBS02S4P06030	M6	30 mm	1 mm	4 mm	4 mm	10 mm	3 mm	7.373 g
FBS02S4P06035	M6	35 mm	1 mm	4 mm	4 mm	10 mm	3 mm	8.383 g
FBS02S4P06040	M6	40 mm	1 mm	4 mm	4 mm	10 mm	3 mm	9.595 g
FBS02S4P06045	M6	45 mm	1 mm	4 mm	4 mm	10 mm	3 mm	10.605 g
FBS02S4P06050	M6	50 mm	1 mm	4 mm	4 mm	10 mm	3 mm	11.615 g
FBS02S4P06055	M6	55 mm	1 mm	4 mm	4 mm	10 mm	3 mm	12.676 g
FBS02S4P06060	M6	60 mm	1 mm	4 mm	4 mm	10 mm	3 mm	13.736 g
FBS02S4P06065	M6	65 mm	1 mm	4 mm	4 mm	10 mm	3 mm	14.796 g
FBS02S4P06070	M6	70 mm	1 mm	4 mm	4 mm	10 mm	3 mm	15.857 g
FBS02S4P06075	M6	75 mm	1 mm	4 mm	4 mm	10 mm	3 mm	16.918 g
FBS02S4P06080	M6	80 mm	1 mm	4 mm	4 mm	10 mm	3 mm	17.978 g
FBS02S4P06090	M6	90 mm	1 mm	4 mm	4 mm	10 mm	3 mm	20.099 g
FBS02S4P06100	M6	100 mm	1 mm	4 mm	4 mm	10 mm	3 mm	22.22 g



Part number	Size (d)	Length (l)	Thread pitch	Hex key size (s)	Head height (k)	Head diameter (dk)	Socket depth (t)	Weight
FBS02S4P06120	M6	120 mm	1 mm	4 mm	4 mm	10 mm	3 mm	26.462 g
FBS02S4P08008	M8	8 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	6.666 g
FBS02S4P08010	M8	10 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	7.222 g
FBS02S4P08012	M8	12 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	7.777 g
FBS02S4P08014	M8	14 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	8.332 g
FBS02S4P08016	M8	16 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	8.888 g
FBS02S4P08018	M8	18 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	9.595 g
FBS02S4P08020	M8	20 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	10.302 g
FBS02S4P08022	M8	22 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	11.231 g
FBS02S4P08025	M8	25 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	12.625 g
FBS02S4P08030	M8	30 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	14.14 g
FBS02S4P08035	M8	35 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	15.857 g
FBS02S4P08040	M8	40 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	17.675 g
FBS02S4P08045	M8	45 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	19.695 g
FBS02S4P08050	M8	50 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	21.715 g
FBS02S4P08055	M8	55 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	23.634 g
FBS02S4P08060	M8	60 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	25.553 g
FBS02S4P08065	M8	65 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	27.472 g
FBS02S4P08070	M8	70 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	29.391 g
FBS02S4P08075	M8	75 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	31.259 g
FBS02S4P08080	M8	80 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	33.128 g
FBS02S4P08090	M8	90 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	36.865 g
FBS02S4P08100	M8	100 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	40.602 g
FBS02S4P08110	M8	110 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	44.339 g
FBS02S4P08120	M8	120 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	48.076 g
FBS02S4P10010	M10	10 mm	1.5 mm	7 mm	6 mm	16 mm	4.5 mm	12.019 g
FBS02S4P10012	M10	12 mm	1.5 mm	7 mm	6 mm	16 mm	4.5 mm	13.231 g
FBS02S4P10014	M10	14 mm	1.5 mm	7 mm	6 mm	16 mm	4.5 mm	14.443 g
FBS02S4P10016	M10	16 mm	1.5 mm	7 mm	6 mm	16 mm	4.5 mm	15.655 g
FBS02S4P10018	M10	18 mm	1.5 mm	7 mm	6 mm	16 mm	4.5 mm	16.867 g
FBS02S4P10020	M10	20 mm	1.5 mm	7 mm	6 mm	16 mm	4.5 mm	18.079 g
FBS02S4P10022	M10	22 mm	1.5 mm	7 mm	6 mm	16 mm	4.5 mm	19.008 g
FBS02S4P10025	M10	25 mm	1.5 mm	7 mm	6 mm	16 mm	4.5 mm	20.402 g
FBS02S4P10030	M10	30 mm	1.5 mm	7 mm	6 mm	16 mm	4.5 mm	22.22 g
FBS02S4P10035	M10	35 mm	1.5 mm	7 mm	6 mm	16 mm	4.5 mm	25.755 g
FBS02S4P10040	M10	40 mm	1.5 mm	7 mm	6 mm	16 mm	4.5 mm	28.785 g
FBS02S4P10045	M10	45 mm	1.5 mm	7 mm	6 mm	16 mm	4.5 mm	31.966 g



Part number	Size (d)	Length (l)	Thread pitch	Hex key size (s)	Head height (k)	Head diameter (dk)	Socket depth (t)	Weight
FBS02S4P10050	M10	50 mm	1.5 mm	7 mm	6 mm	16 mm	4.5 mm	35.148 g
FBS02S4P10055	M10	55 mm	1.5 mm	7 mm	6 mm	16 mm	4.5 mm	37.925 g
FBS02S4P10060	M10	60 mm	1.5 mm	7 mm	6 mm	16 mm	4.5 mm	40.703 g
FBS02S4P10065	M10	65 mm	1.5 mm	7 mm	6 mm	16 mm	4.5 mm	43.581 g
FBS02S4P10070	M10	70 mm	1.5 mm	7 mm	6 mm	16 mm	4.5 mm	46.46 g
FBS02S4P10075	M10	75 mm	1.5 mm	7 mm	6 mm	16 mm	4.5 mm	49.742 g
FBS02S4P10080	M10	80 mm	1.5 mm	7 mm	6 mm	16 mm	4.5 mm	53.025 g
FBS02S4P10090	M10	90 mm	1.5 mm	7 mm	6 mm	16 mm	4.5 mm	58.378 g
FBS02S4P10100	M10	100 mm	1.5 mm	7 mm	6 mm	16 mm	4.5 mm	63.731 g
FBS02S4P10110	M10	110 mm	1.5 mm	7 mm	6 mm	16 mm	4.5 mm	69.084 g
FBS02S4P10120	M10	120 mm	1.5 mm	7 mm	6 mm	16 mm	4.5 mm	74.437 g
FBS02S4P12016	M12	16 mm	1.75 mm	8 mm	7 mm	18 mm	5 mm	22.523 g
FBS02S4P12018	M12	18 mm	1.75 mm	8 mm	7 mm	18 mm	5 mm	24.139 g
FBS02S4P12020	M12	20 mm	1.75 mm	8 mm	7 mm	18 mm	5 mm	25.755 g
FBS02S4P12022	M12	22 mm	1.75 mm	8 mm	7 mm	18 mm	5 mm	27.371 g
FBS02S4P12025	M12	25 mm	1.75 mm	8 mm	7 mm	18 mm	5 mm	29.795 g
FBS02S4P12030	M12	30 mm	1.75 mm	8 mm	7 mm	18 mm	5 mm	32.825 g
FBS02S4P12035	M12	35 mm	1.75 mm	8 mm	7 mm	18 mm	5 mm	36.865 g
FBS02S4P12040	M12	40 mm	1.75 mm	8 mm	7 mm	18 mm	5 mm	40.4 g
FBS02S4P12045	M12	45 mm	1.75 mm	8 mm	7 mm	18 mm	5 mm	44.44 g
FBS02S4P12050	M12	50 mm	1.75 mm	8 mm	7 mm	18 mm	5 mm	48.48 g
FBS02S4P12055	M12	55 mm	1.75 mm	8 mm	7 mm	18 mm	5 mm	53.025 g
FBS02S4P12060	M12	60 mm	1.75 mm	8 mm	7 mm	18 mm	5 mm	57.57 g
FBS02S4P12065	M12	65 mm	1.75 mm	8 mm	7 mm	18 mm	5 mm	61.61 g
FBS02S4P12070	M12	70 mm	1.75 mm	8 mm	7 mm	18 mm	5 mm	65.65 g
FBS02S4P12075	M12	75 mm	1.75 mm	8 mm	7 mm	18 mm	5 mm	69.185 g
FBS02S4P12080	M12	80 mm	1.75 mm	8 mm	7 mm	18 mm	5 mm	72.72 g
FBS02S4P12090	M12	90 mm	1.75 mm	8 mm	7 mm	18 mm	5 mm	80.8 g
FBS02S4P12100	M12	100 mm	1.75 mm	8 mm	7 mm	18 mm	5 mm	88.88 g
FBS02S4P12110	M12	110 mm	1.75 mm	8 mm	7 mm	18 mm	5 mm	96.96 g
FBS02S4P12120	M12	120 mm	1.75 mm	8 mm	7 mm	18 mm	5 mm	105.04 g
FBS02S4PL7030	M12x1.25	30 mm	1.25 mm	8 mm	7 mm	18 mm	5 mm	32.825 g
FBS02S4P16020	M16	20 mm	2 mm	12 mm	9 mm	24 mm	5.5 mm	53.025 g
FBS02S4P16025	M16	25 mm	2 mm	12 mm	9 mm	24 mm	5.5 mm	57.065 g
FBS02S4P16030	M16	30 mm	2 mm	12 mm	9 mm	24 mm	5.5 mm	63.63 g
FBS02S4P16035	M16	35 mm	2 mm	12 mm	9 mm	24 mm	5.5 mm	70.397 g
FBS02S4P16040	M16	40 mm	2 mm	12 mm	9 mm	24 mm	5.5 mm	79.487 g



Part number	Size (d)	Length (l)	Thread pitch	Hex key size (s)	Head height (k)	Head diameter (dk)	Socket depth (t)	Weight
FBS02S4P16045	M16	45 mm	2 mm	12 mm	9 mm	24 mm	5.5 mm	85.951 g
FBS02S4P16050	M16	50 mm	2 mm	12 mm	9 mm	24 mm	5.5 mm	92.415 g
FBS02S4P16055	M16	55 mm	2 mm	12 mm	9 mm	24 mm	5.5 mm	100.243 g
FBS02S4P16060	M16	60 mm	2 mm	12 mm	9 mm	24 mm	5.5 mm	108.07 g
FBS02S4P16065	M16	65 mm	2 mm	12 mm	9 mm	24 mm	5.5 mm	115.645 g
FBS02S4P16070	M16	70 mm	2 mm	12 mm	9 mm	24 mm	5.5 mm	123.22 g
FBS02S4P16075	M16	75 mm	2 mm	12 mm	9 mm	24 mm	5.5 mm	132.31 g
FBS02S4P16080	M16	80 mm	2 mm	12 mm	9 mm	24 mm	5.5 mm	141.4 g
FBS02S4P16090	M16	90 mm	2 mm	12 mm	9 mm	24 mm	5.5 mm	155.54 g
FBS02S4P16100	M16	100 mm	2 mm	12 mm	9 mm	24 mm	5.5 mm	170.69 g
FBS02S4P16110	M16	110 mm	2 mm	12 mm	9 mm	24 mm	5.5 mm	184.83 g
FBS02S4P16120	M16	120 mm	2 mm	12 mm	9 mm	24 mm	5.5 mm	199.98 g
FBS02S4P16130	M16	130 mm	2 mm	12 mm	9 mm	24 mm	5.5 mm	214.12 g
FBS02S4P16140	M16	140 mm	2 mm	12 mm	9 mm	24 mm	5.5 mm	228.26 g
FBS02S4P16150	M16	150 mm	2 mm	12 mm	9 mm	24 mm	5.5 mm	242.4 g
FBS02S4P20030	M20	30 mm	2.5 mm	14 mm	11 mm	30 mm	7.5 mm	109.08 g
FBS02S4P20035	M20	35 mm	2.5 mm	14 mm	11 mm	30 mm	7.5 mm	119.18 g
FBS02S4P20040	M20	40 mm	2.5 mm	14 mm	11 mm	30 mm	7.5 mm	129.28 g
FBS02S4P20045	M20	45 mm	2.5 mm	14 mm	11 mm	30 mm	7.5 mm	140.39 g
FBS02S4P20050	M20	50 mm	2.5 mm	14 mm	11 mm	30 mm	7.5 mm	151.5 g
FBS02S4P20055	M20	55 mm	2.5 mm	14 mm	11 mm	30 mm	7.5 mm	162.61 g
FBS02S4P20060	M20	60 mm	2.5 mm	14 mm	11 mm	30 mm	7.5 mm	173.72 g
FBS02S4P20065	M20	65 mm	2.5 mm	14 mm	11 mm	30 mm	7.5 mm	185.84 g
FBS02S4P20070	M20	70 mm	2.5 mm	14 mm	11 mm	30 mm	7.5 mm	197.96 g
FBS02S4P20075	M20	75 mm	2.5 mm	14 mm	11 mm	30 mm	7.5 mm	211.09 g
FBS02S4P20080	M20	80 mm	2.5 mm	14 mm	11 mm	30 mm	7.5 mm	224.22 g
FBS02S4P20090	M20	90 mm	2.5 mm	14 mm	11 mm	30 mm	7.5 mm	247.45 g
FBS02S4P20100	M20	100 mm	2.5 mm	14 mm	11 mm	30 mm	7.5 mm	271.69 g
FBS02S4P20110	M20	110 mm	2.5 mm	14 mm	11 mm	30 mm	7.5 mm	294.92 g
FBS02S4P20120	M20	120 mm	2.5 mm	14 mm	11 mm	30 mm	7.5 mm	319.16 g
FBS02S4P20130	M20	130 mm	2.5 mm	14 mm	11 mm	30 mm	7.5 mm	345.42 g
FBS02S4P20140	M20	140 mm	2.5 mm	14 mm	11 mm	30 mm	7.5 mm	371.68 g
FBS02S4P20150	M20	150 mm	2.5 mm	14 mm	11 mm	30 mm	7.5 mm	397.94 g
FBS02S4P24040	M24	40 mm	3 mm	17 mm	13 mm	36 mm	8 mm	194.93 g
FBS02S4P24045	M24	45 mm	3 mm	17 mm	13 mm	36 mm	8 mm	212.605 g
FBS02S4P24050	M24	50 mm	3 mm	17 mm	13 mm	36 mm	8 mm	230.28 g
FBS02S4P24055	M24	55 mm	3 mm	17 mm	13 mm	36 mm	8 mm	247.955 g



Part number	Size (d)	Length (l)	Thread pitch	Hex key size (s)	Head height (k)	Head diameter (dk)	Socket depth (t)	Weight
FBS02S4P24060	M24	60 mm	3 mm	17 mm	13 mm	36 mm	8 mm	265.63 g
FBS02S4P24065	M24	65 mm	3 mm	17 mm	13 mm	36 mm	8 mm	283.305 g
FBS02S4P24070	M24	70 mm	3 mm	17 mm	13 mm	36 mm	8 mm	300.98 g
FBS02S4P24075	M24	75 mm	3 mm	17 mm	13 mm	36 mm	8 mm	318.655 g
FBS02S4P24080	M24	80 mm	3 mm	17 mm	13 mm	36 mm	8 mm	336.33 g
FBS02S4P24090	M24	90 mm	3 mm	17 mm	13 mm	36 mm	8 mm	372.69 g
FBS02S4P24100	M24	100 mm	3 mm	17 mm	13 mm	36 mm	8 mm	411.07 g
FBS02S4P24110	M24	110 mm	3 mm	17 mm	13 mm	36 mm	8 mm	443.39 g
FBS02S4P24120	M24	120 mm	3 mm	17 mm	13 mm	36 mm	8 mm	478.74 g
FBS02S4P24130	M24	130 mm	3 mm	17 mm	13 mm	36 mm	8 mm	515.1 g
FBS02S4P24140	M24	140 mm	3 mm	17 mm	13 mm	36 mm	8 mm	550.45 g
FBS02S4P24150	M24	150 mm	3 mm	17 mm	13 mm	36 mm	8 mm	585.8 g

Part numbers: 205

STANDARDS & CERTIFICATES

Standards

DIN 7984 – Low Head Socket Cap Screw

