


Jam Screw (Holo-Krome) - Alloy steel (ASTM A574), Plain

Jam Screw (Holo-Krome), in the sizes, grades and finishes listed.

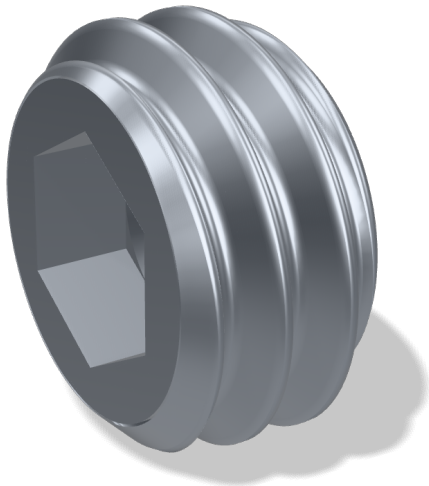

TECHNICAL DATA

General

Standard	Holo-Krome
----------	------------


Dimensions

Thread form	UNC (unified coarse)
-------------	----------------------

Materials & Finish

Drive type	Hexagon socket
Property class / grade	Alloy steel (ASTM A574)
Material	Steel
Surface finish	Plain

DIMENSIONS

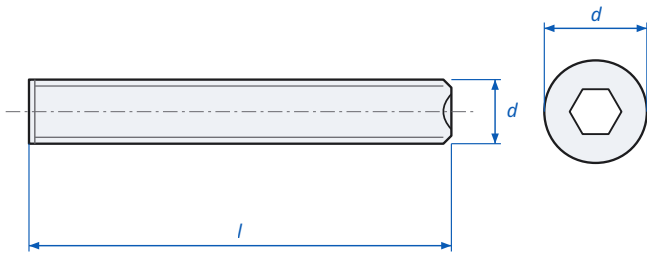

- d Thread diameter
- l Length

Jam Screw (Holo-Krome) - dimensions

AVAILABLE PART NUMBERS

Part number	Variant	Size (d)	Length (l)
FBS09U8P16032	1"-8 UNC x 1/2" Alloy steel (ASTM A574) Plain	1"	0.5 in
FBS09U8P08016	1/2"-13 UNC x 1/4" Alloy steel (ASTM A574) Plain	1/2"	0.25 in
FBS09U8P04008	1/4"-20 UNC x 1/8" Alloy steel (ASTM A574) Plain	1/4"	0.125 in
FBS09U8P12024	3/4"-10 UNC x 3/8" Alloy steel (ASTM A574) Plain	3/4"	0.375 in
FBS09U8P06012	3/8"-24 UNC x 3/16" Alloy steel (ASTM A574) Plain	3/8"	0.1875 in



Part number	Variant	Size (d)	Length (l)
FBS09U8P10020	5/8"-11 UNC x 5/16" Alloy steel (ASTM A574) Plain	5/8"	0.3125 in
FBS09U8P05010	5/16"-24 UNC x 5/32" Alloy steel (ASTM A574) Plain	5/16"	0.15625 in
FBS09U8P14028	7/8"-9 UNC x 7/16" Alloy steel (ASTM A574) Plain	7/8"	0.4375 in
FBS09U8P07014	7/16"-20 UNC x 7/32" Alloy steel (ASTM A574) Plain	7/16"	0.21875 in
FBS09U8PP8005	#4-40 UNC x 5/64" Alloy steel (ASTM A574) Plain	#4	0.078125 in
FBS09U8PQ6007	#8-32 UNC x 7/64" Alloy steel (ASTM A574) Plain	#8	0.109375 in
FBS09U8PQ9008	#10-24 UNC x 1/8" Alloy steel (ASTM A574) Plain	#10	0.125 in

Part numbers: 12

