


Flat Head Socket Cap Screw ASME B18.3 - Alloy steel (ASTM A574), Zinc plated

Flat Head Socket Cap Screw to ASME B18.3, in the sizes, grades and finishes listed.

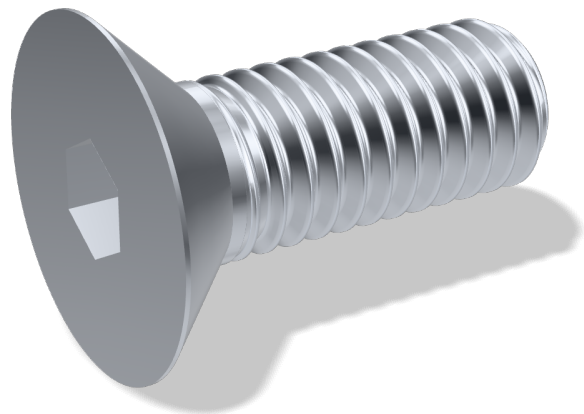

TECHNICAL DATA

General


Standard	ASME B18.3
----------	------------

Materials & Finish

Head type	Countersunk
Drive type	Hexagon socket

Property class / grade	Alloy steel (ASTM A574)
Material	Steel
Surface finish	Zinc plated

DIMENSIONS

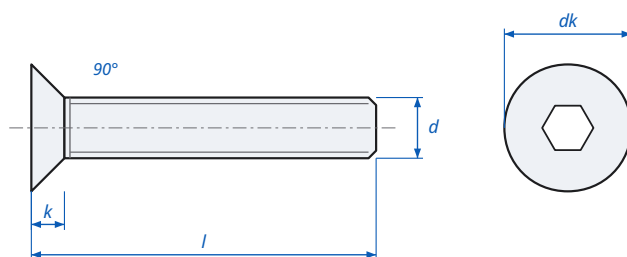

d	Thread diameter
l	Length
k	Head height
dk	Head diameter

Flat Head Socket Cap Screw ASME B18.3 - dimensions

AVAILABLE PART NUMBERS

Part number	Variant	Size (d)	Length (l)
FBK05U8Z08064	1/2"-13 UNC x 1" Alloy steel (ASTM A574) Zinc plated	1/2"	1 in
FBK05U8Z08160	1/2"-13 UNC x 2-1/2" Alloy steel (ASTM A574) Zinc plated	1/2"	2.5 in
FBK05U8Z08448	1/2"-13 UNC x 7" Alloy steel (ASTM A574) Zinc plated	1/2"	7 in
FBK05U8Z04040	1/4"-20 UNC x 5/8" Alloy steel (ASTM A574) Zinc plated	1/4"	0.625 in
FBK05U8Z04048	1/4"-20 UNC x 3/4" Alloy steel (ASTM A574) Zinc plated	1/4"	0.75 in





Part number	Variant	Size (d)	Length (l)
FBK05U8Z04080	1/4"-20 UNC x 1-1/4" Alloy steel (ASTM A574) Zinc plated	1/4"	1.25 in
FBK05U8Z04192	1/4"-20 UNC x 3" Alloy steel (ASTM A574) Zinc plated	1/4"	3 in
FBK05U8Z06048	3/8"-16 UNC x 3/4" Alloy steel (ASTM A574) Zinc plated	3/8"	0.75 in
FBK05U8Z06080	3/8"-16 UNC x 1-1/4" Alloy steel (ASTM A574) Zinc plated	3/8"	1.25 in
FBK05U8Z05080	5/16"-18 UNC x 1-1/4" Alloy steel (ASTM A574) Zinc plated	5/16"	1.25 in
FBK05U8Z05160	5/16"-18 UNC x 2-1/2" Alloy steel (ASTM A574) Zinc plated	5/16"	2.5 in
FBK05U8ZR1040	#10-24 UNF x 5/8" Alloy steel (ASTM A574) Zinc plated	#10-32 UNF	0.625 in

Part numbers: 12

STANDARDS & CERTIFICATES

Standards

ASME B18.3 – Socket Head Cap Screw

