


Slotted Spring Pin Heavy Duty DIN 1481 / ISO 8752 - Steel, Zinc plated

Slotted Spring Pin Heavy Duty to DIN 1481 / ISO 8752, in the sizes, grades and finishes listed.

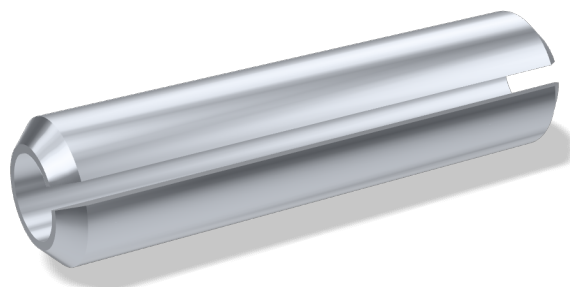

TECHNICAL DATA

General



Standard	DIN 1481 / ISO 8752
----------	---------------------

Materials & Finish

Property class / grade	Steel
------------------------	-------

Material	Steel
Surface finish	Zinc plated

DIMENSIONS

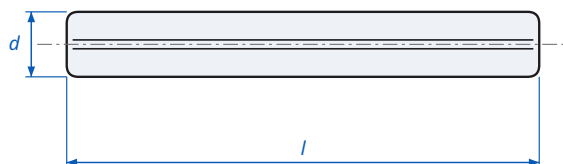

d	Nominal diameter
l	Length
s	Wall thickness
d1	Outer diameter before fitting

Slotted Spring Pin Heavy Duty DIN 1481 / ISO 8752 - dimensions

AVAILABLE PART NUMBERS

Part number	Size (d)	Length (l)	Wall thickness (s)	Diameter before fitting (d1)	Weight
FPS01STZ02006	Ø2	6 mm	0.4 mm	1.5 mm	0.092 g
FPS01STZ02008	Ø2	8 mm	0.4 mm	1.5 mm	0.122 g
FPS01STZ02010	Ø2	10 mm	0.4 mm	1.5 mm	0.153 g
FPS01STZ02012	Ø2	12 mm	0.4 mm	1.5 mm	0.184 g
FPS01STZ02016	Ø2	16 mm	0.4 mm	1.5 mm	0.244 g
FPS01STZ02020	Ø2	20 mm	0.4 mm	1.5 mm	0.305 g
FPS01STZC5006	Ø2.5	6 mm	0.5 mm	1.8 mm	0.142 g
FPS01STZC5008	Ø2.5	8 mm	0.5 mm	1.8 mm	0.189 g
FPS01STZC5010	Ø2.5	10 mm	0.5 mm	1.8 mm	0.236 g
FPS01STZC5012	Ø2.5	12 mm	0.5 mm	1.8 mm	0.283 g
FPS01STZC5016	Ø2.5	16 mm	0.5 mm	1.8 mm	0.377 g



Part number	Size (d)	Length (l)	Wall thickness (s)	Diameter before fitting (d1)	Weight
FPS01STZC5020	Ø2.5	20 mm	0.5 mm	1.8 mm	0.471 g
FPS01STZ03008	Ø3	8 mm	0.6 mm	2.1 mm	0.272 g
FPS01STZ03010	Ø3	10 mm	0.6 mm	2.1 mm	0.34 g
FPS01STZ03012	Ø3	12 mm	0.6 mm	2.1 mm	0.407 g
FPS01STZ03014	Ø3	14 mm	0.6 mm	2.1 mm	0.475 g
FPS01STZ03016	Ø3	16 mm	0.6 mm	2.1 mm	0.543 g
FPS01STZ03018	Ø3	18 mm	0.6 mm	2.1 mm	0.611 g
FPS01STZ03020	Ø3	20 mm	0.6 mm	2.1 mm	0.679 g
FPS01STZ04010	Ø4	10 mm	0.8 mm	2.8 mm	0.597 g
FPS01STZ04012	Ø4	12 mm	0.8 mm	2.8 mm	0.716 g
FPS01STZ04016	Ø4	16 mm	0.8 mm	2.8 mm	0.955 g
FPS01STZ04018	Ø4	18 mm	0.8 mm	2.8 mm	1.07 g
FPS01STZ04020	Ø4	20 mm	0.8 mm	2.8 mm	1.19 g
FPS01STZ04022	Ø4	22 mm	0.8 mm	2.8 mm	1.31 g
FPS01STZ04024	Ø4	24 mm	0.8 mm	2.8 mm	1.43 g
FPS01STZ04028	Ø4	28 mm	0.8 mm	2.8 mm	1.67 g
FPS01STZ04030	Ø4	30 mm	0.8 mm	2.8 mm	1.79 g
FPS01STZ04036	Ø4	36 mm	0.8 mm	2.8 mm	2.18 g
FPS01STZ04040	Ø4	40 mm	0.8 mm	2.8 mm	2.39 g
FPS01STZ05016	Ø5	16 mm	1 mm	3.4 mm	1.51 g
FPS01STZ05020	Ø5	20 mm	1 mm	3.4 mm	1.88 g
FPS01STZ05022	Ø5	22 mm	1 mm	3.4 mm	2.07 g
FPS01STZ05024	Ø5	24 mm	1 mm	3.4 mm	2.26 g
FPS01STZ05026	Ø5	26 mm	1 mm	3.4 mm	2.45 g
FPS01STZ05030	Ø5	30 mm	1 mm	3.4 mm	2.83 g
FPS01STZ05036	Ø5	36 mm	1 mm	3.4 mm	3.39 g
FPS01STZ05040	Ø5	40 mm	1 mm	3.4 mm	3.77 g
FPS01STZ05050	Ø5	50 mm	1 mm	3.4 mm	4.71 g
FPS01STZ05060	Ø5	60 mm	1 mm	3.4 mm	5.65 g
FPS01STZ06010	Ø6	10 mm	1.25 mm	4 mm	1.38 g
FPS01STZ06012	Ø6	12 mm	1.25 mm	4 mm	1.66 g
FPS01STZ06014	Ø6	14 mm	1.25 mm	4 mm	1.94 g
FPS01STZ06016	Ø6	16 mm	1.25 mm	4 mm	2.21 g
FPS01STZ06020	Ø6	20 mm	1.25 mm	4 mm	2.77 g
FPS01STZ06022	Ø6	22 mm	1.25 mm	4 mm	3.04 g
FPS01STZ06024	Ø6	24 mm	1.25 mm	4 mm	3.32 g
FPS01STZ06026	Ø6	26 mm	1.25 mm	4 mm	3.6 g



Part number	Size (d)	Length (l)	Wall thickness (s)	Diameter before fitting (d1)	Weight
FPS01STZ06030	Ø6	30 mm	1.25 mm	4 mm	4.15 g
FPS01STZ06032	Ø6	32 mm	1.25 mm	4 mm	4.43 g
FPS01STZ06036	Ø6	36 mm	1.25 mm	4 mm	4.98 g
FPS01STZ06040	Ø6	40 mm	1.25 mm	4 mm	5.54 g
FPS01STZ08010	Ø8	10 mm	1.5 mm	5.5 mm	2.24 g
FPS01STZ08012	Ø8	12 mm	1.5 mm	5.5 mm	2.66 g
FPS01STZ08016	Ø8	16 mm	1.5 mm	5.5 mm	3.58 g
FPS01STZ08020	Ø8	20 mm	1.5 mm	5.5 mm	4.48 g
FPS01STZ08024	Ø8	24 mm	1.5 mm	5.5 mm	5.37 g
FPS01STZ08030	Ø8	30 mm	1.5 mm	5.5 mm	6.71 g
FPS01STZ08040	Ø8	40 mm	1.5 mm	5.5 mm	8.95 g
FPS01STZ08050	Ø8	50 mm	1.5 mm	5.5 mm	11.2 g
FPS01STZ08060	Ø8	60 mm	1.5 mm	5.5 mm	13.4 g
FPS01STZ16060	Ø16	60 mm	3 mm	10.5 mm	55.1 g

Part numbers: 62

STANDARDS & CERTIFICATES

Standards

DIN 1481 – Slotted Spring Pin Heavy Duty

ISO 8752 – Slotted Spring Pin Heavy Duty

