


Hex Socket Shoulder Screw ISO 7379 - Steel 12.9, Zinc plated

Hex Socket Shoulder Screw to ISO 7379, in the sizes, grades and finishes listed.

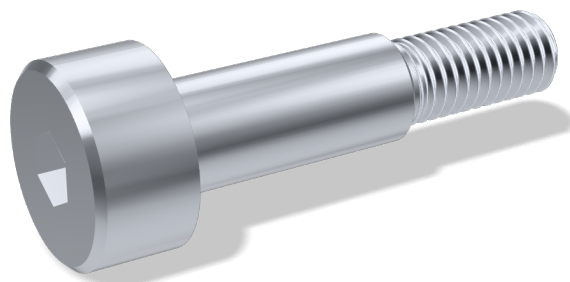

TECHNICAL DATA

General



Standard	ISO 7379
----------	----------

Materials & Finish

Head type	Socket cap
Drive type	Hexagon socket

Property class / grade	12.9
Material	Steel
Surface finish	Zinc plated

DIMENSIONS

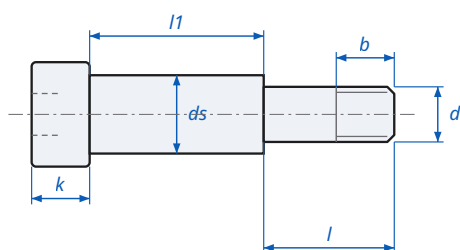

d	Thread diameter
ds	Shoulder diameter
l	Shoulder length
l1	Overall length
b	Thread length
k	Head height
dk	Head diameter

Hex Socket Shoulder Screw ISO 7379 - dimensions

AVAILABLE PART NUMBERS

Part number	Variant	Size (d)	Length (l)	Hex key size	Head height (k)	Head diameter (dk)	Thread length (b)	Shoulder diameter (ds)	Weight
FBS06G2ZQ9010	Ø8 (M6)x10 12.9 Zinc plated	Ø8 (M6)	10 mm	5 mm	7 mm	16 mm	13.25 mm	10 mm	13.74 g
FBS06G2ZQ9012	Ø8 (M6)x12 12.9 Zinc plated	Ø8 (M6)	12 mm	5 mm	7 mm	16 mm	13.25 mm	10 mm	14.4 g
FBS06G2ZQ9030	Ø8 (M6)x30 12.9 Zinc plated	Ø8 (M6)	30 mm	5 mm	7 mm	16 mm	13.25 mm	10 mm	20.4 g
FBS06G2ZQ9035	Ø8 (M6)x35 12.9 Zinc plated	Ø8 (M6)	35 mm	5 mm	7 mm	16 mm	13.25 mm	10 mm	22.06 g
FBS06G2ZR0016	Ø10 (M8)x16 12.9 Zinc plated	Ø10 (M8)	16 mm	6 mm	9 mm	18 mm	16.4 mm	13 mm	25.23 g



Part number	Variant	Size (d)	Length (l)	Hex key size	Head height (k)	Head diameter (dk)	Thread length (b)	Shoulder diameter (ds)	Weight
FBS06G2ZR0025	Ø10 (M8)x25 12.9 Zinc plated	Ø10 (M8)	25 mm	6 mm	9 mm	18 mm	16.4 mm	13 mm	29.91 g
FBS06G2ZR1025	Ø12 (M10)x25 12.9 Zinc plated	Ø12 (M10)	25 mm	8 mm	11 mm	24 mm	18.4 mm	16 mm	55.21 g
FBS06G2ZR1030	Ø12 (M10)x30 12.9 Zinc plated	Ø12 (M10)	30 mm	8 mm	11 mm	24 mm	18.4 mm	16 mm	58.96 g
FBS06G2ZR1050	Ø12 (M10)x50 12.9 Zinc plated	Ø12 (M10)	50 mm	8 mm	11 mm	24 mm	18.4 mm	16 mm	73.95 g
FBS06G2ZR1060	Ø12 (M10)x60 12.9 Zinc plated	Ø12 (M10)	60 mm	8 mm	11 mm	24 mm	18.4 mm	16 mm	81.44 g
FBS06G2ZR1080	Ø12 (M10)x80 12.9 Zinc plated	Ø12 (M10)	80 mm	8 mm	11 mm	24 mm	18.4 mm	16 mm	96.43 g

Part numbers: 11

STANDARDS & CERTIFICATES

Standards

ISO 7379 – Hex Socket Shoulder Screw

