




Hex Socket Set Screw Cup Point DIN 916 / ISO 4029 - Steel 45H, Nylon locking patch

Hex Socket Set Screw Cup Point to DIN 916 / ISO 4029, in the sizes, grades and finishes listed.

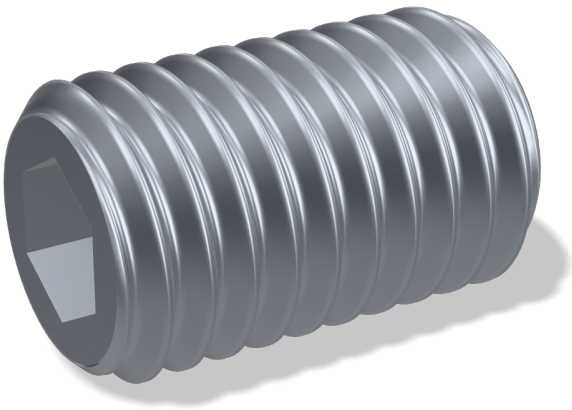

TECHNICAL DATA

General

Standard	DIN 916 / ISO 4029
----------	--------------------


Dimensions

Thread form	Metric ISO thread
-------------	-------------------

Materials & Finish

Drive type	Hexagon socket
Property class / grade	45H
Material	Steel
Surface finish	Nylon locking patch

DIMENSIONS

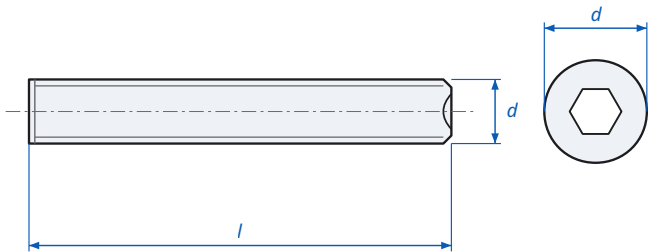

- d Thread diameter
- l Length

Hex Socket Set Screw Cup Point DIN 916 / ISO 4029 - dimensions

AVAILABLE PART NUMBERS

Part number	Size (d)	Length (l)	Thread pitch	Hex key size	Weight
FB00145Q04010	M4	10 mm	0.7 mm	2 mm	0.0986 g
FB00145Q05014	M5	14 mm	0.8 mm	2.5 mm	0.2175 g
FB00145Q06006	M6	6 mm	1 mm	3 mm	0.74 g
FB00145Q06010	M6	10 mm	1 mm	3 mm	1.44 g
FB00145Q06012	M6	12 mm	1 mm	3 mm	1.79 g





Part number	Size (d)	Length (l)	Thread pitch	Hex key size	Weight
FB00145Q06016	M6	16 mm	1 mm	3 mm	2.49 g
FB00145Q06035	M6	35 mm	1 mm	3 mm	5.83 g
FB00145Q08008	M8	8 mm	1.25 mm	4 mm	1.88 g
FB00145Q08010	M8	10 mm	1.25 mm	4 mm	2.51 g

Part numbers: 9

STANDARDS & CERTIFICATES

Standards

DIN 916 – Hex Socket Set Screw Cup Point

ISO 4029 – Hex Socket Set Screw Cup Point

