


Slotted Countersunk Head Screw DIN 963 / ISO 2009 - Nylon PA 6.6, Plain

Slotted Countersunk Head Screw to DIN 963 / ISO 2009, in the sizes, grades and finishes listed.

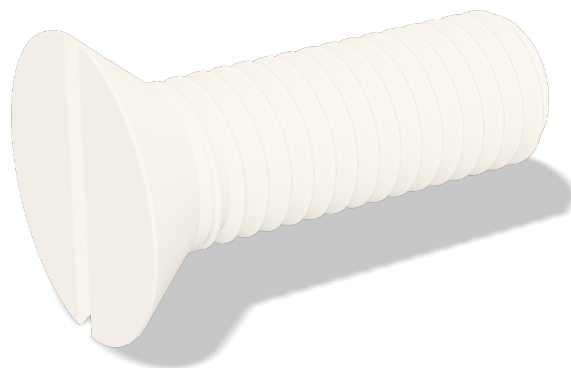

TECHNICAL DATA

General

Standard	DIN 963
----------	---------

Dimensions


Thread form	Metric ISO thread
-------------	-------------------

Materials & Finish

Head type	Countersunk
-----------	-------------

Drive type	Slotted
Property class / grade	Nylon PA 6.6
Material	Nylon (PA)
Surface finish	Plain

DIMENSIONS

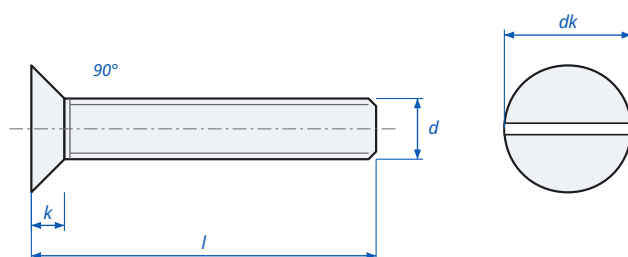

d	Thread diameter
l	Length
k	Head height
dk	Head diameter

Slotted Countersunk Head Screw DIN 963 / ISO 2009 - dimensions

AVAILABLE PART NUMBERS

Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Weight
FBK03PAP03008	M3	8 mm	0.5 mm	1.65 mm	5.6 mm	0.0677 g
FBK03PAP03010	M3	10 mm	0.5 mm	1.65 mm	5.6 mm	0.0805 g
FBK03PAP03012	M3	12 mm	0.5 mm	1.65 mm	5.6 mm	0.0932 g
FBK03PAP03016	M3	16 mm	0.5 mm	1.65 mm	5.6 mm	0.1189 g
FBK03PAP03025	M3	25 mm	0.5 mm	1.65 mm	5.6 mm	0.1769 g
FBK03PAP04008	M4	8 mm	0.7 mm	2.2 mm	7.5 mm	0.1319 g



Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Weight
FBK03PAP04010	M4	10 mm	0.7 mm	2.2 mm	7.5 mm	0.1537 g
FBK03PAP04025	M4	25 mm	0.7 mm	2.2 mm	7.5 mm	0.3219 g
FBK03PAP05008	M5	8 mm	0.8 mm	2.5 mm	9.2 mm	0.2102 g
FBK03PAP05010	M5	10 mm	0.8 mm	2.5 mm	9.2 mm	0.2465 g
FBK03PAP05016	M5	16 mm	0.8 mm	2.5 mm	9.2 mm	0.3538 g
FBK03PAP05025	M5	25 mm	0.8 mm	2.5 mm	9.2 mm	0.5147 g
FBK03PAP06025	M6	25 mm	1 mm	3 mm	11 mm	0.7526 g
FBK03PAP06040	M6	40 mm	1 mm	3 mm	11 mm	1.137 g
FBK03PAP08025	M8	25 mm	1.25 mm	4 mm	14.5 mm	1.42 g
FBK03PAP10030	M10	30 mm	1.5 mm	5 mm	18 mm	2.697 g

Part numbers: 16

STANDARDS & CERTIFICATES

Standards

DIN 963 – Slotted Countersunk Head Screw

ISO 2009 – Slotted Countersunk Head Screw

