


Cross Recessed Countersunk Head Screw DIN 965 / ISO 7046-1 - Steel 4.8, Zinc plated

Cross Recessed Countersunk Head Screw to DIN 965 / ISO 7046-1, in the sizes, grades and finishes listed.

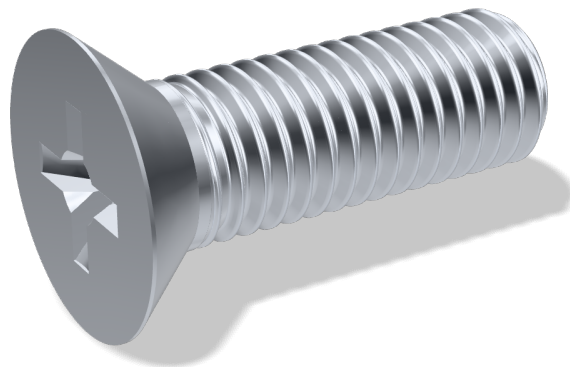

TECHNICAL DATA

Dimensions



Thread form	Metric ISO thread
-------------	-------------------

Materials & Finish

Head type	Countersunk
Drive type	Phillips

Property class / grade	4.8
Material	Steel
Surface finish	Zinc plated

DIMENSIONS

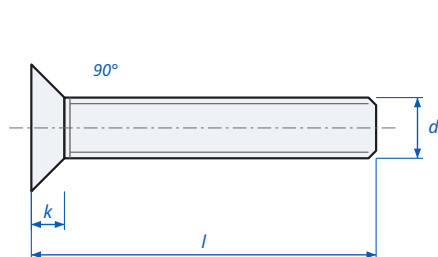

d	Thread diameter
l	Length
k	Head height
dk	Head diameter

Cross Recessed Countersunk Head Screw DIN 965 / ISO 7046-1 - dimensions

AVAILABLE PART NUMBERS

Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Weight
FBK08H4Z02004	M2	4 mm	0.4 mm	1.2 mm	3.8 mm	0.1165 g
FBK08H4Z02005	M2	5 mm	0.4 mm	1.2 mm	3.8 mm	0.1352 g
FBK08H4Z02006	M2	6 mm	0.4 mm	1.2 mm	3.8 mm	0.1538 g
FBK08H4Z02008	M2	8 mm	0.4 mm	1.2 mm	3.8 mm	0.1911 g
FBK08H4Z02010	M2	10 mm	0.4 mm	1.2 mm	3.8 mm	0.2285 g
FBK08H4Z02012	M2	12 mm	0.4 mm	1.2 mm	3.8 mm	0.2658 g



Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Weight
FBK08H4Z02016	M2	16 mm	0.4 mm	1.2 mm	3.8 mm	0.3405 g
FBK08H4Z02020	M2	20 mm	0.4 mm	1.2 mm	3.8 mm	0.4151 g
FBK08H4ZC5004	M2.5	4 mm	0.45 mm	1.5 mm	4.7 mm	0.206 g
FBK08H4ZC5005	M2.5	5 mm	0.45 mm	1.5 mm	4.7 mm	0.236 g
FBK08H4ZC5006	M2.5	6 mm	0.45 mm	1.5 mm	4.7 mm	0.266 g
FBK08H4ZC5008	M2.5	8 mm	0.45 mm	1.5 mm	4.7 mm	0.326 g
FBK08H4ZC5010	M2.5	10 mm	0.45 mm	1.5 mm	4.7 mm	0.386 g
FBK08H4ZC5012	M2.5	12 mm	0.45 mm	1.5 mm	4.7 mm	0.446 g
FBK08H4ZC5016	M2.5	16 mm	0.45 mm	1.5 mm	4.7 mm	0.567 g
FBK08H4ZC5020	M2.5	20 mm	0.45 mm	1.5 mm	4.7 mm	0.687 g
FBK04H4Z03004	M3	4 mm	0.5 mm	1.65 mm	5.6 mm	0.29 g
FBK04H4Z03005	M3	5 mm	0.5 mm	1.65 mm	5.6 mm	0.335 g
FBK04H4Z03006	M3	6 mm	0.5 mm	1.65 mm	5.6 mm	0.379 g
FBK04H4Z03008	M3	8 mm	0.5 mm	1.65 mm	5.6 mm	0.467 g
FBK04H4Z03010	M3	10 mm	0.5 mm	1.65 mm	5.6 mm	0.555 g
FBK04H4Z03012	M3	12 mm	0.5 mm	1.65 mm	5.6 mm	0.643 g
FBK04H4Z03014	M3	14 mm	0.5 mm	1.65 mm	5.6 mm	0.731 g
FBK04H4Z03016	M3	16 mm	0.5 mm	1.65 mm	5.6 mm	0.82 g
FBK04H4Z03018	M3	18 mm	0.5 mm	1.65 mm	5.6 mm	0.908 g
FBK04H4Z03020	M3	20 mm	0.5 mm	1.65 mm	5.6 mm	0.996 g
FBK04H4Z03022	M3	22 mm	0.5 mm	1.65 mm	5.6 mm	1.08 g
FBK04H4Z03025	M3	25 mm	0.5 mm	1.65 mm	5.6 mm	1.22 g
FBK04H4Z03030	M3	30 mm	0.5 mm	1.65 mm	5.6 mm	1.44 g
FBK04H4Z03035	M3	35 mm	0.5 mm	1.65 mm	5.6 mm	1.665 g
FBK04H4Z03040	M3	40 mm	0.5 mm	1.65 mm	5.6 mm	1.89 g
FBK04H4Z03050	M3	50 mm	0.5 mm	1.65 mm	5.6 mm	2.34 g
FBK04H4ZD5030	M3.5	30 mm	0.6 mm	1.93 mm	6.5 mm	1.99 g
FBK04H4Z04005	M4	5 mm	0.7 mm	2.2 mm	7.5 mm	0.676 g
FBK04H4Z04006	M4	6 mm	0.7 mm	2.2 mm	7.5 mm	0.754 g
FBK04H4Z04008	M4	8 mm	0.7 mm	2.2 mm	7.5 mm	0.91 g
FBK04H4Z04010	M4	10 mm	0.7 mm	2.2 mm	7.5 mm	1.06 g
FBK04H4Z04012	M4	12 mm	0.7 mm	2.2 mm	7.5 mm	1.22 g
FBK04H4Z04014	M4	14 mm	0.7 mm	2.2 mm	7.5 mm	1.37 g
FBK04H4Z04016	M4	16 mm	0.7 mm	2.2 mm	7.5 mm	1.53 g
FBK04H4Z04018	M4	18 mm	0.7 mm	2.2 mm	7.5 mm	1.68 g
FBK04H4Z04020	M4	20 mm	0.7 mm	2.2 mm	7.5 mm	1.84 g
FBK04H4Z04025	M4	25 mm	0.7 mm	2.2 mm	7.5 mm	2.22 g



Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Weight
FBK04H4Z04030	M4	30 mm	0.7 mm	2.2 mm	7.5 mm	2.61 g
FBK04H4Z04035	M4	35 mm	0.7 mm	2.2 mm	7.5 mm	3 g
FBK04H4Z04040	M4	40 mm	0.7 mm	2.2 mm	7.5 mm	3.38 g
FBK04H4Z04045	M4	45 mm	0.7 mm	2.2 mm	7.5 mm	3.76 g
FBK04H4Z04050	M4	50 mm	0.7 mm	2.2 mm	7.5 mm	4.14 g
FBK04H4Z04060	M4	60 mm	0.7 mm	2.2 mm	7.5 mm	4.9 g
FBK04H4Z05008	M5	8 mm	0.8 mm	2.5 mm	9.2 mm	1.45 g
FBK04H4Z05010	M5	10 mm	0.8 mm	2.5 mm	9.2 mm	1.7 g
FBK04H4Z05012	M5	12 mm	0.8 mm	2.5 mm	9.2 mm	1.95 g
FBK04H4Z05014	M5	14 mm	0.8 mm	2.5 mm	9.2 mm	2.19 g
FBK04H4Z05016	M5	16 mm	0.8 mm	2.5 mm	9.2 mm	2.44 g
FBK04H4Z05020	M5	20 mm	0.8 mm	2.5 mm	9.2 mm	2.94 g
FBK04H4Z05025	M5	25 mm	0.8 mm	2.5 mm	9.2 mm	3.55 g
FBK04H4Z05030	M5	30 mm	0.8 mm	2.5 mm	9.2 mm	4.16 g
FBK04H4Z05035	M5	35 mm	0.8 mm	2.5 mm	9.2 mm	4.65 g
FBK04H4Z05040	M5	40 mm	0.8 mm	2.5 mm	9.2 mm	5.4 g
FBK04H4Z05045	M5	45 mm	0.8 mm	2.5 mm	9.2 mm	6.02 g
FBK04H4Z05050	M5	50 mm	0.8 mm	2.5 mm	9.2 mm	6.64 g
FBK04H4Z05060	M5	60 mm	0.8 mm	2.5 mm	9.2 mm	7.88 g
FBK04H4Z06010	M6	10 mm	1 mm	3 mm	11 mm	2.54 g
FBK04H4Z06012	M6	12 mm	1 mm	3 mm	11 mm	2.89 g
FBK04H4Z06014	M6	14 mm	1 mm	3 mm	11 mm	3.25 g
FBK04H4Z06016	M6	16 mm	1 mm	3 mm	11 mm	3.6 g
FBK04H4Z06018	M6	18 mm	1 mm	3 mm	11 mm	3.95 g
FBK04H4Z06020	M6	20 mm	1 mm	3 mm	11 mm	4.31 g
FBK04H4Z06025	M6	25 mm	1 mm	3 mm	11 mm	5.19 g
FBK04H4Z06030	M6	30 mm	1 mm	3 mm	11 mm	6.08 g
FBK04H4Z06035	M6	35 mm	1 mm	3 mm	11 mm	6.96 g
FBK04H4Z06040	M6	40 mm	1 mm	3 mm	11 mm	7.84 g
FBK04H4Z06045	M6	45 mm	1 mm	3 mm	11 mm	8.73 g
FBK04H4Z06050	M6	50 mm	1 mm	3 mm	11 mm	9.62 g
FBK04H4Z06060	M6	60 mm	1 mm	3 mm	11 mm	11.4 g
FBK04H4Z06070	M6	70 mm	1 mm	3 mm	11 mm	13.18 g
FBK04H4Z06080	M6	80 mm	1 mm	3 mm	11 mm	14.96 g
FBK04H4Z08016	M8	16 mm	1.25 mm	4 mm	14.5 mm	6.94 g
FBK04H4Z08020	M8	20 mm	1.25 mm	4 mm	14.5 mm	8.21 g
FBK04H4Z08025	M8	25 mm	1.25 mm	4 mm	14.5 mm	9.79 g



Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Weight
FBK04H4Z08030	M8	30 mm	1.25 mm	4 mm	14.5 mm	11.4 g
FBK04H4Z08035	M8	35 mm	1.25 mm	4 mm	14.5 mm	13 g
FBK04H4Z08040	M8	40 mm	1.25 mm	4 mm	14.5 mm	14.6 g
FBK04H4Z08045	M8	45 mm	1.25 mm	4 mm	14.5 mm	16.2 g
FBK04H4Z08050	M8	50 mm	1.25 mm	4 mm	14.5 mm	17.8 g
FBK04H4Z10030	M10	30 mm	1.5 mm	5 mm	18 mm	18.6 g
FBK04H4Z10040	M10	40 mm	1.5 mm	5 mm	18 mm	23.6 g

Part numbers: 87

STANDARDS & CERTIFICATES

Standards

DIN 965 – Cross Recessed Countersunk Head Screw

ISO 7046-1 – Cross Recessed Countersunk Head Screw

