


Hex Socket Set Screw Cup Point DIN 916 / ISO 4029 - Steel 45H, Zinc plated

Hex Socket Set Screw Cup Point to DIN 916 / ISO 4029, in the sizes, grades and finishes listed.

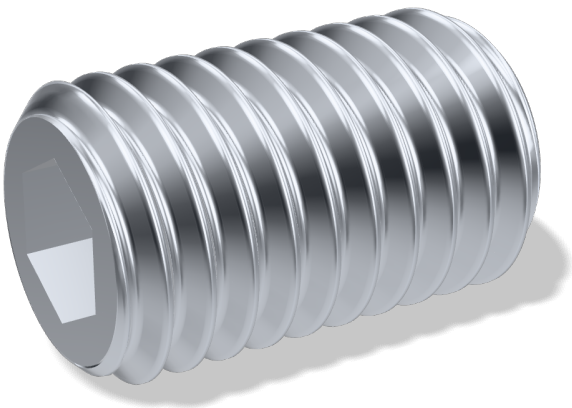

TECHNICAL DATA

General

Standard	DIN 916 / ISO 4029
----------	--------------------


Dimensions

Thread form	Metric ISO thread
-------------	-------------------

Materials & Finish

Drive type	Hexagon socket
Property class / grade	45H
Material	Steel
Surface finish	Zinc plated

DIMENSIONS

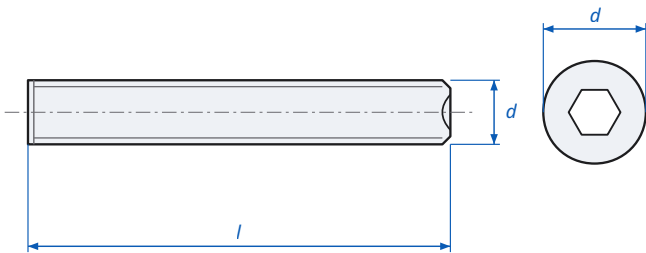

- d Thread diameter
- l Length

Hex Socket Set Screw Cup Point DIN 916 / ISO 4029 - dimensions

AVAILABLE PART NUMBERS

Part number	Size (d)	Length (l)	Thread pitch	Hex key size	Weight
FB00145Z03004	M3	4 mm	0.5 mm	1.5 mm	0.14 g
FB00145Z03005	M3	5 mm	0.5 mm	1.5 mm	0.18 g
FB00145Z03006	M3	6 mm	0.5 mm	1.5 mm	0.22 g
FB00145Z03010	M3	10 mm	0.5 mm	1.5 mm	0.4 g
FB00145Z03012	M3	12 mm	0.5 mm	1.5 mm	0.49 g
FB00145Z03016	M3	16 mm	0.5 mm	1.5 mm	0.67 g



Part number	Size (d)	Length (l)	Thread pitch	Hex key size	Weight
FB00145Z03025	M3	25 mm	0.5 mm	1.5 mm	1.075 g
FB00145Z04004	M4	4 mm	0.7 mm	2 mm	0.13 g
FB00145Z04006	M4	6 mm	0.7 mm	2 mm	0.38 g
FB00145Z04008	M4	8 mm	0.7 mm	2 mm	0.53 g
FB00145Z04010	M4	10 mm	0.7 mm	2 mm	0.68 g
FB00145Z05006	M5	6 mm	0.8 mm	2.5 mm	0.54 g
FB00145Z05008	M5	8 mm	0.8 mm	2.5 mm	0.78 g
FB00145Z05010	M5	10 mm	0.8 mm	2.5 mm	1.02 g
FB00145Z05020	M5	20 mm	0.8 mm	2.5 mm	2.22 g
FB00145Z05025	M5	25 mm	0.8 mm	2.5 mm	2.82 g
FB00145Z06006	M6	6 mm	1 mm	3 mm	0.74 g
FB00145Z06010	M6	10 mm	1 mm	3 mm	1.44 g
FB00145Z06016	M6	16 mm	1 mm	3 mm	2.49 g
FB00145Z06040	M6	40 mm	1 mm	3 mm	6.71 g
FB00145Z06045	M6	45 mm	1 mm	3 mm	7.59 g
FB00145Z08006	M8	6 mm	1.25 mm	4 mm	1.25 g
FB00145Z08008	M8	8 mm	1.25 mm	4 mm	1.88 g
FB00145Z08010	M8	10 mm	1.25 mm	4 mm	2.51 g
FB00145Z08012	M8	12 mm	1.25 mm	4 mm	3.14 g
FB00145Z08016	M8	16 mm	1.25 mm	4 mm	4.4 g
FB00145Z08020	M8	20 mm	1.25 mm	4 mm	5.66 g
FB00145Z08025	M8	25 mm	1.25 mm	4 mm	7.25 g
FB00145Z08040	M8	40 mm	1.25 mm	4 mm	12 g
FB00145Z08045	M8	45 mm	1.25 mm	4 mm	13.6 g
FB00145Z10010	M10	10 mm	1.5 mm	5 mm	3.73 g
FB00145Z10020	M10	20 mm	1.5 mm	5 mm	8.71 g
FB00145Z10025	M10	25 mm	1.5 mm	5 mm	11.2 g
FB00145Z10035	M10	35 mm	1.5 mm	5 mm	16.2 g
FB00145Z10050	M10	50 mm	1.5 mm	5 mm	23.7 g
FB00145Z10060	M10	60 mm	1.5 mm	5 mm	28.7 g
FB00145Z12012	M12	12 mm	1.75 mm	6 mm	6.7 g
FB00145Z12016	M12	16 mm	1.75 mm	6 mm	9.5 g
FB00145Z12020	M12	20 mm	1.75 mm	6 mm	12.3 g
FB00145Z12025	M12	25 mm	1.75 mm	6 mm	15.9 g
FB00145Z12030	M12	30 mm	1.75 mm	6 mm	19.5 g
FB00145Z12035	M12	35 mm	1.75 mm	6 mm	23.1 g
FB00145Z12050	M12	50 mm	1.75 mm	6 mm	33.9 g





Part number	Size (d)	Length (l)	Thread pitch	Hex key size	Weight
FB00145Z16020	M16	20 mm	2 mm	8 mm	20.9 g

Part numbers: 44

STANDARDS & CERTIFICATES

Standards

DIN 916 – Hex Socket Set Screw Cup Point

ISO 4029 – Hex Socket Set Screw Cup Point

