


Hex Socket Set Screw Flat Point DIN 913 / ISO 4026 - Steel 45H, Zinc plated

Hex Socket Set Screw Flat Point to DIN 913 / ISO 4026, in the sizes, grades and finishes listed.

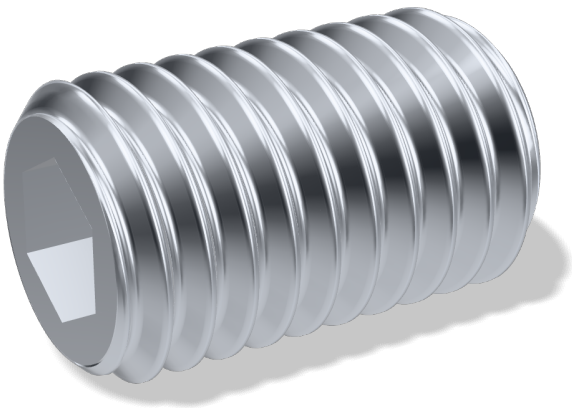

TECHNICAL DATA

General

Standard	DIN 913 / ISO 4026
----------	--------------------


Dimensions

Thread form	Metric ISO thread
-------------	-------------------

Materials & Finish

Drive type	Hexagon socket
Property class / grade	45H
Material	Steel
Surface finish	Zinc plated

DIMENSIONS

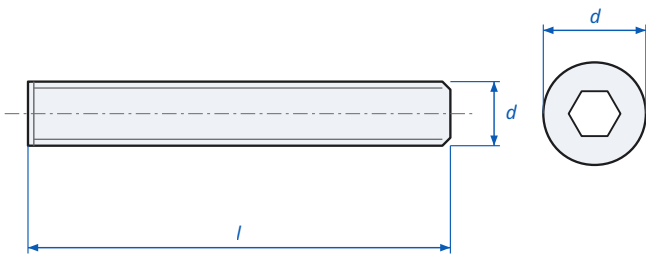

- d Thread diameter
- l Length

Hex Socket Set Screw Flat Point DIN 913 / ISO 4026 - dimensions

AVAILABLE PART NUMBERS

Part number	Size (d)	Length (l)	Thread pitch	Hex key size	Weight
FB00245Z03005	M3	5 mm	0.5 mm	1.5 mm	0.18 g
FB00245Z05004	M5	4 mm	0.8 mm	2.5 mm	0.3 g
FB00245Z05005	M5	5 mm	0.8 mm	2.5 mm	0.42 g
FB00245Z05006	M5	6 mm	0.8 mm	2.5 mm	0.54 g
FB00245Z05008	M5	8 mm	0.8 mm	2.5 mm	0.78 g
FB00245Z05010	M5	10 mm	0.8 mm	2.5 mm	1.02 g



Part number	Size (d)	Length (l)	Thread pitch	Hex key size	Weight
FB00245Z05012	M5	12 mm	0.8 mm	2.5 mm	1.26 g
FB00245Z05016	M5	16 mm	0.8 mm	2.5 mm	1.74 g
FB00245Z05018	M5	18 mm	0.8 mm	2.5 mm	1.98 g
FB00245Z05020	M5	20 mm	0.8 mm	2.5 mm	2.22 g
FB00245Z05025	M5	25 mm	0.8 mm	2.5 mm	2.82 g
FB00245Z05030	M5	30 mm	0.8 mm	2.5 mm	3.42 g
FB00245Z05035	M5	35 mm	0.8 mm	2.5 mm	4.02 g
FB00245Z05040	M5	40 mm	0.8 mm	2.5 mm	4.62 g
FB00245Z06005	M6	5 mm	1 mm	3 mm	0.565 g
FB00245Z06006	M6	6 mm	1 mm	3 mm	0.74 g
FB00245Z06008	M6	8 mm	1 mm	3 mm	1.09 g
FB00245Z06010	M6	10 mm	1 mm	3 mm	1.44 g
FB00245Z06012	M6	12 mm	1 mm	3 mm	1.79 g
FB00245Z06014	M6	14 mm	1 mm	3 mm	2.14 g
FB00245Z06016	M6	16 mm	1 mm	3 mm	2.49 g
FB00245Z06018	M6	18 mm	1 mm	3 mm	2.84 g
FB00245Z06020	M6	20 mm	1 mm	3 mm	3.19 g
FB00245Z06025	M6	25 mm	1 mm	3 mm	4.07 g
FB00245Z06030	M6	30 mm	1 mm	3 mm	4.95 g
FB00245Z06035	M6	35 mm	1 mm	3 mm	5.83 g
FB00245Z06040	M6	40 mm	1 mm	3 mm	6.71 g
FB00245Z06045	M6	45 mm	1 mm	3 mm	7.59 g
FB00245Z06050	M6	50 mm	1 mm	3 mm	8.47 g
FB00245Z06060	M6	60 mm	1 mm	3 mm	10.23 g
FB00245Z08006	M8	6 mm	1.25 mm	4 mm	1.25 g
FB00245Z08008	M8	8 mm	1.25 mm	4 mm	1.88 g
FB00245Z08010	M8	10 mm	1.25 mm	4 mm	2.51 g
FB00245Z08012	M8	12 mm	1.25 mm	4 mm	3.14 g
FB00245Z08016	M8	16 mm	1.25 mm	4 mm	4.4 g
FB00245Z08018	M8	18 mm	1.25 mm	4 mm	5.03 g
FB00245Z08020	M8	20 mm	1.25 mm	4 mm	5.66 g
FB00245Z08025	M8	25 mm	1.25 mm	4 mm	7.25 g
FB00245Z08030	M8	30 mm	1.25 mm	4 mm	8.84 g
FB00245Z08035	M8	35 mm	1.25 mm	4 mm	10.4 g
FB00245Z08040	M8	40 mm	1.25 mm	4 mm	12 g
FB00245Z08045	M8	45 mm	1.25 mm	4 mm	13.6 g
FB00245Z08050	M8	50 mm	1.25 mm	4 mm	15.2 g



Part number	Size (d)	Length (l)	Thread pitch	Hex key size	Weight
FB00245Z08055	M8	55 mm	1.25 mm	4 mm	16.8 g
FB00245Z08060	M8	60 mm	1.25 mm	4 mm	18.4 g
FB00245Z08070	M8	70 mm	1.25 mm	4 mm	21.6 g
FB00245Z08080	M8	80 mm	1.25 mm	4 mm	24.8 g
FB00245Z08090	M8	90 mm	1.25 mm	4 mm	28 g
FB00245Z08100	M8	100 mm	1.25 mm	4 mm	31.2 g
FB00245Z08130	M8	130 mm	1.25 mm	4 mm	40.8 g
FB00245Z10050	M10	50 mm	1.5 mm	5 mm	23.7 g
FB00245Z12025	M12	25 mm	1.75 mm	6 mm	15.9 g
FB00245Z12040	M12	40 mm	1.75 mm	6 mm	26.7 g
FB00245Z16016	M16	16 mm	2 mm	8 mm	15.7 g
FB00245Z16020	M16	20 mm	2 mm	8 mm	20.9 g
FB00245Z16025	M16	25 mm	2 mm	8 mm	27.4 g
FB00245Z16030	M16	30 mm	2 mm	8 mm	34 g
FB00245Z16035	M16	35 mm	2 mm	8 mm	40.5 g
FB00245Z16040	M16	40 mm	2 mm	8 mm	47.1 g
FB00245Z16045	M16	45 mm	2 mm	8 mm	53.7 g
FB00245Z16050	M16	50 mm	2 mm	8 mm	60.3 g
FB00245Z16055	M16	55 mm	2 mm	8 mm	66.9 g
FB00245Z16060	M16	60 mm	2 mm	8 mm	73.5 g
FB00245Z16070	M16	70 mm	2 mm	8 mm	86.7 g
FB00245Z16080	M16	80 mm	2 mm	8 mm	99.9 g
FB00245Z16090	M16	90 mm	2 mm	8 mm	113.1 g
FB00245Z20020	M20	20 mm	2.5 mm	10 mm	31.1 g
FB00245Z20025	M20	25 mm	2.5 mm	10 mm	41.4 g
FB00245Z20030	M20	30 mm	2.5 mm	10 mm	51.7 g
FB00245Z20035	M20	35 mm	2.5 mm	10 mm	62 g
FB00245Z20040	M20	40 mm	2.5 mm	10 mm	72.3 g
FB00245Z20050	M20	50 mm	2.5 mm	10 mm	92.9 g
FB00245Z20060	M20	60 mm	2.5 mm	10 mm	113.5 g
FB00245Z20070	M20	70 mm	2.5 mm	10 mm	134.1 g
FB00245Z20080	M20	80 mm	2.5 mm	10 mm	154.7 g
FB00245Z20090	M20	90 mm	2.5 mm	10 mm	175.3 g
FB00245Z24025	M24	25 mm	3 mm	12 mm	55.3 g
FB00245Z24030	M24	30 mm	3 mm	12 mm	70.3 g
FB00245Z24035	M24	35 mm	3 mm	12 mm	85.3 g
FB00245Z24040	M24	40 mm	3 mm	12 mm	100 g



Part number	Size (d)	Length (l)	Thread pitch	Hex key size	Weight
FB00245Z24060	M24	60 mm	3 mm	12 mm	160 g
FB00245Z24070	M24	70 mm	3 mm	12 mm	190 g
FB00245Z24080	M24	80 mm	3 mm	12 mm	220 g

Part numbers: 83

STANDARDS & CERTIFICATES

Standards

DIN 913 – Hex Socket Set Screw Flat Point

ISO 4026 – Hex Socket Set Screw Flat Point

