


Hex Socket Pipe Plug Tapered DIN 906 - Stainless steel A4, Plain

Hex Socket Pipe Plug Tapered to DIN 906, in the sizes, grades and finishes listed.

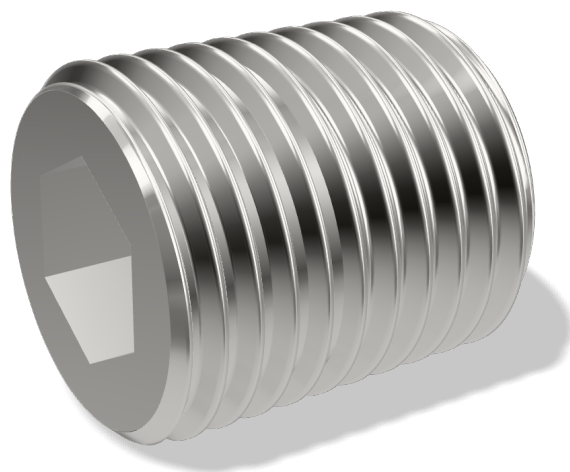

TECHNICAL DATA

General


Standard	DIN 906
----------	---------

Materials & Finish

Drive type	Hexagon socket
------------	----------------

Property class / grade	A4 stainless
Material	Stainless steel
Surface finish	Plain

DIMENSIONS

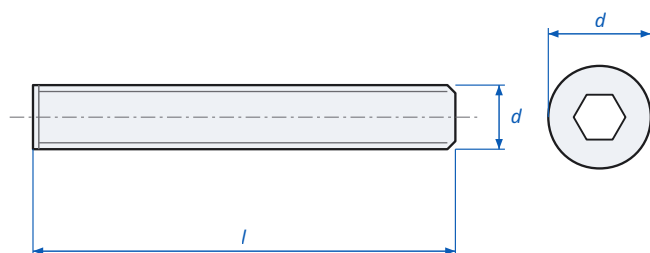

d Thread size

l Length

Hex Socket Pipe Plug Tapered DIN 906 - dimensions

AVAILABLE PART NUMBERS

Part number	Size (d)	Thread pitch	Hex key size	Weight
FXS02A4P06000	M6	1 mm	—	—
FXS02A4PN2000	M8x1	1 mm	4 mm	2.091 g
FXS02A4PN3000	M10x1	1 mm	5 mm	3.414 g
FXS02A4PN4000	M12x1.5	1.5 mm	6 mm	6.161 g
FXS02A4PN5000	M14x1.5	1.5 mm	7 mm	8.181 g
FXS02A4PN6000	M16x1.5	1.5 mm	8 mm	11.11 g



Part number	Size (d)	Thread pitch	Hex key size	Weight
FXS02A4PN7000	M18x1.5	1.5 mm	8 mm	14.746 g
FXS02A4PN8000	M20x1.5	1.5 mm	10 mm	17.776 g
FXS02A4PN9000	M22x1.5	1.5 mm	10 mm	22.22 g
FXS02A4PP0000	M24x1.5	1.5 mm	12 mm	31.108 g
FXS02A4PR7000	M26x1.5	1.5 mm	12 mm	38.986 g
FXS02A4PP1000	M27x2	2 mm	12 mm	40.602 g
FXS02A4PP2000	M30x1.5	1.5 mm	17 mm	44.44 g
FXS02A4PP3000	M30x2	2 mm	17 mm	44.44 g
FXS02A4P34000	M34	–	–	–
FXS02A4P38000	M38	–	19 mm	95.344 g
FXS02A4P44000	M44	–	–	–
FXS02A4P50000	M50	–	–	–
FXS02A4PQ9000	R 1	–	–	–
FXS02A4PR2000	R 1/2	–	–	–
FXS02A4PR3000	R 1/4	–	–	–
FXS02A4PR4000	R 1/8	–	–	–
FXS02A4PR5000	R 3/4	–	–	–
FXS02A4PR6000	R 3/8	–	–	–

Part numbers: 24

STANDARDS & CERTIFICATES

Standards

DIN 906 – Hex Socket Pipe Plug Tapered

