


Hex Thin Nut DIN 439 / ISO 4035 - Stainless steel A2, Plain

Hex Thin Nut to DIN 439 / ISO 4035, in the sizes, grades and finishes listed.

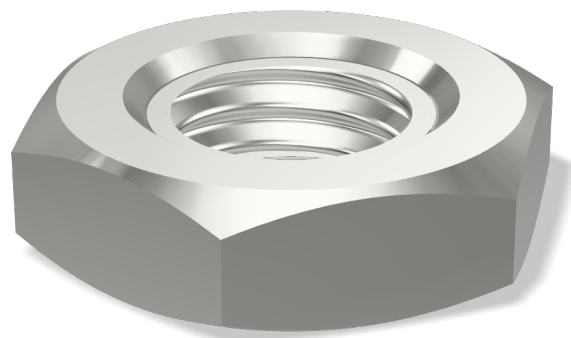

TECHNICAL DATA



Materials & Finish

Property class / grade	A2 stainless
Material	Stainless steel

Surface finish

Plain

DIMENSIONS



s Width across flats (WAF)

e Width across corners

m Nut height

Hex Thin Nut DIN 439 / ISO 4035 - dimensions

AVAILABLE PART NUMBERS

Part number	Size	Thread pitch	Width across flats (s)	Width across corners (e)	Nut height (m)	Weight
FNH03A2PB6000	M1.6	0.35 mm	3.2 mm	3.41 mm	1 mm	0.0606 g
FNH07A2PB7000	M1.7	0.35 mm	–	–	–	–
FNH03A2P02000	M2	0.4 mm	4 mm	4.32 mm	1.2 mm	0.1111 g
FNH07A2PC3000	M2.3	0.4 mm	–	–	–	–
FNH03A2PC5000	M2.5	0.45 mm	5 mm	5.45 mm	1.6 mm	0.2222 g
FNH07A2PC6000	M2.6	0.45 mm	–	–	–	–
FNH03A2P03000	M3	0.5 mm	5.5 mm	6.01 mm	1.8 mm	0.2929 g
FNH03A2PD5000	M3.5	0.6 mm	6 mm	6.58 mm	2 mm	0.3737 g
FNH03A2P04000	M4	0.7 mm	7 mm	7.66 mm	2.2 mm	0.5757 g
FNH03A2P05000	M5	0.8 mm	8 mm	8.79 mm	2.7 mm	0.8383 g



Part number	Size	Thread pitch	Width across flats (s)	Width across corners (e)	Nut height (m)	Weight
FNH03A2P06000	M6	1 mm	10 mm	11.05 mm	3.2 mm	1.616 g
FNH03A2P08000	M8	1.25 mm	13 mm	14.38 mm	4 mm	3.232 g
FNH03A2PL5000	M8x0.75	0.75 mm	13 mm	14.38 mm	4 mm	3.232 g
FNH03A2PL6000	M8x1	1 mm	13 mm	14.38 mm	4 mm	3.232 g
FNH07A2P10000	M10	1.5 mm	17 mm	18.9 mm	5 mm	7.272 g
FNH07A2PL7000	M10x1	1 mm	17 mm	18.9 mm	5 mm	7.272 g
FNH07A2PL8000	M10x1.25	1.25 mm	17 mm	18.9 mm	5 mm	7.272 g
FNH07A2P12000	M12	1.75 mm	19 mm	21.1 mm	6 mm	10.504 g
FNH07A2PL9000	M12x1	1 mm	19 mm	21.1 mm	6 mm	10.504 g
FNH07A2PN0000	M12x1.25	1.25 mm	19 mm	21.1 mm	6 mm	10.504 g
FNH07A2PN1000	M12x1.5	1.5 mm	19 mm	21.1 mm	6 mm	10.504 g
FNH07A2P14000	M14	2 mm	22 mm	24.49 mm	7 mm	16.059 g
FNH07A2PN3000	M14x1.5	1.5 mm	22 mm	24.49 mm	7 mm	16.059 g
FNH03A2P16000	M16	2 mm	24 mm	26.75 mm	8 mm	20.705 g
FNH03A2PN6000	M16x1.5	1.5 mm	24 mm	26.75 mm	8 mm	20.705 g
FNH03A2P18000	M18	2.5 mm	27 mm	29.56 mm	9 mm	29.896 g
FNH03A2PN8000	M18x1.5	1.5 mm	27 mm	29.56 mm	9 mm	29.896 g
FNH03A2P20000	M20	2.5 mm	30 mm	32.95 mm	10 mm	40.602 g
FNH03A2PP1000	M20x1.5	1.5 mm	30 mm	32.95 mm	10 mm	40.602 g
FNH03A2PP2000	M20x2	2 mm	30 mm	32.95 mm	10 mm	40.602 g
FNH07A2P22000	M22	2.5 mm	32 mm	35.03 mm	11 mm	48.783 g
FNH07A2PP3000	M22x1.5	1.5 mm	32 mm	35.03 mm	11 mm	48.783 g
FNH07A2PP4000	M22x2	2 mm	32 mm	35.03 mm	11 mm	48.783 g
FNH03A2P24000	M24	3 mm	36 mm	39.55 mm	12 mm	70.195 g
FNH03A2PP5000	M24x1.5	1.5 mm	36 mm	39.55 mm	12 mm	70.195 g
FNH03A2PP6000	M24x2	2 mm	36 mm	39.55 mm	12 mm	70.195 g
FNH03A2P27000	M27	3 mm	41 mm	45.2 mm	13.5 mm	102.01 g
FNH03A2PP7000	M27x1.5	1.5 mm	41 mm	45.2 mm	13.5 mm	102.01 g
FNH03A2PP8000	M27x2	2 mm	41 mm	45.2 mm	13.5 mm	102.01 g
FNH03A2P30000	M30	3.5 mm	46 mm	50.85 mm	15 mm	140.39 g
FNH03A2PP9000	M30x1.5	1.5 mm	46 mm	50.85 mm	15 mm	140.39 g
FNH03A2PQ0000	M30x2	2 mm	46 mm	50.85 mm	15 mm	140.39 g
FNH03A2P33000	M33	3.5 mm	50 mm	55.37 mm	16.5 mm	184.83 g
FNH03A2PQ2000	M33x1.5	1.5 mm	50 mm	55.37 mm	16.5 mm	184.83 g
FNH03A2PQ3000	M33x2	2 mm	50 mm	55.37 mm	16.5 mm	184.83 g
FNH03A2P36000	M36	4 mm	55 mm	60.79 mm	18 mm	246.44 g
FNH03A2PQ5000	M36x1.5	1.5 mm	55 mm	60.79 mm	18 mm	246.44 g



Part number	Size	Thread pitch	Width across flats (s)	Width across corners (e)	Nut height (m)	Weight
FNH03A2PQ7000	M36x3	3 mm	55 mm	60.79 mm	18 mm	246.44 g
FNH03A2P39000	M39	4 mm	60 mm	66.44 mm	19.5 mm	319.16 g
FNH03A2P42000	M42	4.5 mm	65 mm	71.3 mm	21 mm	407.03 g
FNH03A2P45000	M45	4.5 mm	70 mm	76.95 mm	22.5 mm	505 g
FNH03A2P48000	M48	5 mm	75 mm	82.6 mm	24 mm	623.17 g
FNH03A2P52000	M52	5 mm	80 mm	88.25 mm	26 mm	762.55 g

Part numbers: 53

STANDARDS & CERTIFICATES

Standards

DIN 439 – Hex Thin Nut

ISO 4035 – Hex Thin Nut

