


Low Head Socket Cap Screw DIN 7984 - Steel 8.8, Plain

Low Head Socket Cap Screw to DIN 7984, in the sizes, grades and finishes listed.

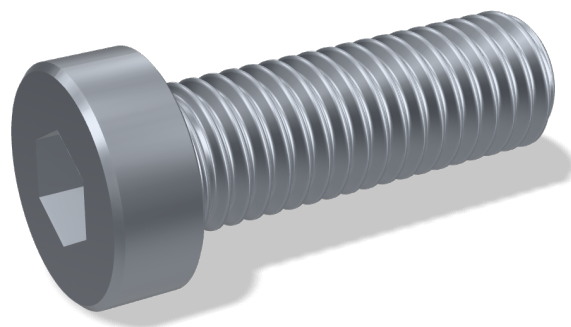

TECHNICAL DATA

General

Standard	DIN 7984
----------	----------

Dimensions



Thread form	Metric ISO thread
-------------	-------------------

Materials & Finish

Head type	Socket cap
-----------	------------

Drive type	Hexagon socket
Property class / grade	8.8
Material	Steel
Surface finish	Plain

DIMENSIONS

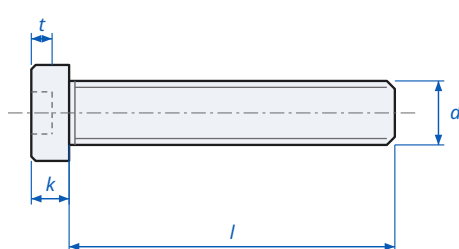

d	Thread diameter
l	Length
k	Head height
dk	Head diameter
s	Hex key size
t	Socket depth

Low Head Socket Cap Screw DIN 7984 - dimensions

AVAILABLE PART NUMBERS

Part number	Size (d)	Length (l)	Thread pitch	Hex key size (s)	Head height (k)	Head diameter (dk)	Socket depth (t)	Weight
FBS02G8P03004	M3	4 mm	0.5 mm	2 mm	2 mm	5.5 mm	1.5 mm	0.5128 g
FBS02G8P03005	M3	5 mm	0.5 mm	2 mm	2 mm	5.5 mm	1.5 mm	0.5569 g
FBS02G8P03006	M3	6 mm	0.5 mm	2 mm	2 mm	5.5 mm	1.5 mm	0.601 g
FBS02G8P03008	M3	8 mm	0.5 mm	2 mm	2 mm	5.5 mm	1.5 mm	0.6892 g
FBS02G8P03010	M3	10 mm	0.5 mm	2 mm	2 mm	5.5 mm	1.5 mm	0.7775 g
FBS02G8P03012	M3	12 mm	0.5 mm	2 mm	2 mm	5.5 mm	1.5 mm	0.8657 g
FBS02G8P03014	M3	14 mm	0.5 mm	2 mm	2 mm	5.5 mm	1.5 mm	0.9539 g



Part number	Size (d)	Length (l)	Thread pitch	Hex key size (s)	Head height (k)	Head diameter (dk)	Socket depth (t)	Weight
FBS02G8P03016	M3	16 mm	0.5 mm	2 mm	2 mm	5.5 mm	1.5 mm	1.042 g
FBS02G8P03018	M3	18 mm	0.5 mm	2 mm	2 mm	5.5 mm	1.5 mm	1.13 g
FBS02G8P03020	M3	20 mm	0.5 mm	2 mm	2 mm	5.5 mm	1.5 mm	1.219 g
FBS02G8P03022	M3	22 mm	0.5 mm	2 mm	2 mm	5.5 mm	1.5 mm	1.307 g
FBS02G8P03025	M3	25 mm	0.5 mm	2 mm	2 mm	5.5 mm	1.5 mm	1.439 g
FBS02G8P03030	M3	30 mm	0.5 mm	2 mm	2 mm	5.5 mm	1.5 mm	1.66 g
FBS02G8P04005	M4	5 mm	0.7 mm	2.5 mm	2.8 mm	7 mm	2.3 mm	0.8 g
FBS02G8P04006	M4	6 mm	0.7 mm	2.5 mm	2.8 mm	7 mm	2.3 mm	0.9 g
FBS02G8P04008	M4	8 mm	0.7 mm	2.5 mm	2.8 mm	7 mm	2.3 mm	1.1 g
FBS02G8P04010	M4	10 mm	0.7 mm	2.5 mm	2.8 mm	7 mm	2.3 mm	1.3 g
FBS02G8P04012	M4	12 mm	0.7 mm	2.5 mm	2.8 mm	7 mm	2.3 mm	1.5 g
FBS02G8P04014	M4	14 mm	0.7 mm	2.5 mm	2.8 mm	7 mm	2.3 mm	1.7 g
FBS02G8P04016	M4	16 mm	0.7 mm	2.5 mm	2.8 mm	7 mm	2.3 mm	1.9 g
FBS02G8P04018	M4	18 mm	0.7 mm	2.5 mm	2.8 mm	7 mm	2.3 mm	2.1 g
FBS02G8P04020	M4	20 mm	0.7 mm	2.5 mm	2.8 mm	7 mm	2.3 mm	2.3 g
FBS02G8P04025	M4	25 mm	0.7 mm	2.5 mm	2.8 mm	7 mm	2.3 mm	2.7 g
FBS02G8P04030	M4	30 mm	0.7 mm	2.5 mm	2.8 mm	7 mm	2.3 mm	3.2 g
FBS02G8P04035	M4	35 mm	0.7 mm	2.5 mm	2.8 mm	7 mm	2.3 mm	3.7 g
FBS02G8P04040	M4	40 mm	0.7 mm	2.5 mm	2.8 mm	7 mm	2.3 mm	4.2 g
FBS02G8P04045	M4	45 mm	0.7 mm	2.5 mm	2.8 mm	7 mm	2.3 mm	4.7 g
FBS02G8P04050	M4	50 mm	0.7 mm	2.5 mm	2.8 mm	7 mm	2.3 mm	5.2 g
FBS02G8P05006	M5	6 mm	0.8 mm	3 mm	3.5 mm	8.5 mm	2.7 mm	1.6 g
FBS02G8P05008	M5	8 mm	0.8 mm	3 mm	3.5 mm	8.5 mm	2.7 mm	1.9 g
FBS02G8P05010	M5	10 mm	0.8 mm	3 mm	3.5 mm	8.5 mm	2.7 mm	2.2 g
FBS02G8P05012	M5	12 mm	0.8 mm	3 mm	3.5 mm	8.5 mm	2.7 mm	2.5 g
FBS02G8P05014	M5	14 mm	0.8 mm	3 mm	3.5 mm	8.5 mm	2.7 mm	2.8 g
FBS02G8P05016	M5	16 mm	0.8 mm	3 mm	3.5 mm	8.5 mm	2.7 mm	3.1 g
FBS02G8P05018	M5	18 mm	0.8 mm	3 mm	3.5 mm	8.5 mm	2.7 mm	3.4 g
FBS02G8P05020	M5	20 mm	0.8 mm	3 mm	3.5 mm	8.5 mm	2.7 mm	3.7 g
FBS02G8P05025	M5	25 mm	0.8 mm	3 mm	3.5 mm	8.5 mm	2.7 mm	4.4 g
FBS02G8P05030	M5	30 mm	0.8 mm	3 mm	3.5 mm	8.5 mm	2.7 mm	5.1 g
FBS02G8P05035	M5	35 mm	0.8 mm	3 mm	3.5 mm	8.5 mm	2.7 mm	5.8 g
FBS02G8P05040	M5	40 mm	0.8 mm	3 mm	3.5 mm	8.5 mm	2.7 mm	6.6 g
FBS02G8P05045	M5	45 mm	0.8 mm	3 mm	3.5 mm	8.5 mm	2.7 mm	6.95 g
FBS02G8P05050	M5	50 mm	0.8 mm	3 mm	3.5 mm	8.5 mm	2.7 mm	7.3 g
FBS02G8P05055	M5	55 mm	0.8 mm	3 mm	3.5 mm	8.5 mm	2.7 mm	8.15 g
FBS02G8P05060	M5	60 mm	0.8 mm	3 mm	3.5 mm	8.5 mm	2.7 mm	9 g



Part number	Size (d)	Length (l)	Thread pitch	Hex key size (s)	Head height (k)	Head diameter (dk)	Socket depth (t)	Weight
FBS02G8P05070	M5	70 mm	0.8 mm	3 mm	3.5 mm	8.5 mm	2.7 mm	10.7 g
FBS02G8P05080	M5	80 mm	0.8 mm	3 mm	3.5 mm	8.5 mm	2.7 mm	12.4 g
FBS02G8P05090	M5	90 mm	0.8 mm	3 mm	3.5 mm	8.5 mm	2.7 mm	14.1 g
FBS02G8P05100	M5	100 mm	0.8 mm	3 mm	3.5 mm	8.5 mm	2.7 mm	15.8 g
FBS02G8P06006	M6	6 mm	1 mm	4 mm	4 mm	10 mm	3 mm	3 g
FBS02G8P06008	M6	8 mm	1 mm	4 mm	4 mm	10 mm	3 mm	3.3 g
FBS02G8P06010	M6	10 mm	1 mm	4 mm	4 mm	10 mm	3 mm	3.6 g
FBS02G8P06012	M6	12 mm	1 mm	4 mm	4 mm	10 mm	3 mm	3.9 g
FBS02G8P06014	M6	14 mm	1 mm	4 mm	4 mm	10 mm	3 mm	4.2 g
FBS02G8P06016	M6	16 mm	1 mm	4 mm	4 mm	10 mm	3 mm	4.5 g
FBS02G8P06018	M6	18 mm	1 mm	4 mm	4 mm	10 mm	3 mm	4.85 g
FBS02G8P06020	M6	20 mm	1 mm	4 mm	4 mm	10 mm	3 mm	5.2 g
FBS02G8P06022	M6	22 mm	1 mm	4 mm	4 mm	10 mm	3 mm	5.6 g
FBS02G8P06025	M6	25 mm	1 mm	4 mm	4 mm	10 mm	3 mm	6.2 g
FBS02G8P06030	M6	30 mm	1 mm	4 mm	4 mm	10 mm	3 mm	7.3 g
FBS02G8P06035	M6	35 mm	1 mm	4 mm	4 mm	10 mm	3 mm	8.3 g
FBS02G8P06040	M6	40 mm	1 mm	4 mm	4 mm	10 mm	3 mm	9.5 g
FBS02G8P06045	M6	45 mm	1 mm	4 mm	4 mm	10 mm	3 mm	10.5 g
FBS02G8P06050	M6	50 mm	1 mm	4 mm	4 mm	10 mm	3 mm	11.5 g
FBS02G8P06055	M6	55 mm	1 mm	4 mm	4 mm	10 mm	3 mm	12.55 g
FBS02G8P06060	M6	60 mm	1 mm	4 mm	4 mm	10 mm	3 mm	13.6 g
FBS02G8P06070	M6	70 mm	1 mm	4 mm	4 mm	10 mm	3 mm	15.7 g
FBS02G8P06080	M6	80 mm	1 mm	4 mm	4 mm	10 mm	3 mm	17.8 g
FBS02G8P06090	M6	90 mm	1 mm	4 mm	4 mm	10 mm	3 mm	19.9 g
FBS02G8P06100	M6	100 mm	1 mm	4 mm	4 mm	10 mm	3 mm	22 g
FBS02G8P08008	M8	8 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	6.6 g
FBS02G8P08010	M8	10 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	7.15 g
FBS02G8P08012	M8	12 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	7.7 g
FBS02G8P08014	M8	14 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	8.25 g
FBS02G8P08016	M8	16 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	8.8 g
FBS02G8P08018	M8	18 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	9.5 g
FBS02G8P08020	M8	20 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	10.2 g
FBS02G8P08022	M8	22 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	11.12 g
FBS02G8P08025	M8	25 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	12.5 g
FBS02G8P08030	M8	30 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	14 g
FBS02G8P08035	M8	35 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	15.7 g
FBS02G8P08040	M8	40 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	17.5 g



Part number	Size (d)	Length (l)	Thread pitch	Hex key size (s)	Head height (k)	Head diameter (dk)	Socket depth (t)	Weight
FBS02G8P08045	M8	45 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	19.5 g
FBS02G8P08050	M8	50 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	21.5 g
FBS02G8P08055	M8	55 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	23.4 g
FBS02G8P08060	M8	60 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	25.3 g
FBS02G8P08070	M8	70 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	29.1 g
FBS02G8P08075	M8	75 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	30.95 g
FBS02G8P08080	M8	80 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	32.8 g
FBS02G8P08090	M8	90 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	36.5 g
FBS02G8P08100	M8	100 mm	1.25 mm	5 mm	5 mm	13 mm	3.8 mm	40.2 g
FBS02G8P10012	M10	12 mm	1.5 mm	7 mm	6 mm	16 mm	4.5 mm	13.1 g
FBS02G8P10014	M10	14 mm	1.5 mm	7 mm	6 mm	16 mm	4.5 mm	14.3 g
FBS02G8P10016	M10	16 mm	1.5 mm	7 mm	6 mm	16 mm	4.5 mm	15.5 g
FBS02G8P10018	M10	18 mm	1.5 mm	7 mm	6 mm	16 mm	4.5 mm	16.7 g
FBS02G8P10020	M10	20 mm	1.5 mm	7 mm	6 mm	16 mm	4.5 mm	17.9 g
FBS02G8P10022	M10	22 mm	1.5 mm	7 mm	6 mm	16 mm	4.5 mm	18.82 g
FBS02G8P10025	M10	25 mm	1.5 mm	7 mm	6 mm	16 mm	4.5 mm	20.2 g
FBS02G8P10030	M10	30 mm	1.5 mm	7 mm	6 mm	16 mm	4.5 mm	22 g
FBS02G8P10035	M10	35 mm	1.5 mm	7 mm	6 mm	16 mm	4.5 mm	25.5 g
FBS02G8P10040	M10	40 mm	1.5 mm	7 mm	6 mm	16 mm	4.5 mm	28.5 g
FBS02G8P10045	M10	45 mm	1.5 mm	7 mm	6 mm	16 mm	4.5 mm	31.65 g
FBS02G8P10050	M10	50 mm	1.5 mm	7 mm	6 mm	16 mm	4.5 mm	34.8 g
FBS02G8P10055	M10	55 mm	1.5 mm	7 mm	6 mm	16 mm	4.5 mm	37.55 g
FBS02G8P10060	M10	60 mm	1.5 mm	7 mm	6 mm	16 mm	4.5 mm	40.3 g
FBS02G8P10070	M10	70 mm	1.5 mm	7 mm	6 mm	16 mm	4.5 mm	46 g
FBS02G8P10080	M10	80 mm	1.5 mm	7 mm	6 mm	16 mm	4.5 mm	52.5 g
FBS02G8P10090	M10	90 mm	1.5 mm	7 mm	6 mm	16 mm	4.5 mm	57.8 g
FBS02G8P10100	M10	100 mm	1.5 mm	7 mm	6 mm	16 mm	4.5 mm	63.1 g
FBS02G8P10120	M10	120 mm	1.5 mm	7 mm	6 mm	16 mm	4.5 mm	73.7 g
FBS02G8P12016	M12	16 mm	1.75 mm	8 mm	7 mm	18 mm	5 mm	22.3 g
FBS02G8P12018	M12	18 mm	1.75 mm	8 mm	7 mm	18 mm	5 mm	23.9 g
FBS02G8P12020	M12	20 mm	1.75 mm	8 mm	7 mm	18 mm	5 mm	25.5 g
FBS02G8P12025	M12	25 mm	1.75 mm	8 mm	7 mm	18 mm	5 mm	29.5 g
FBS02G8P12030	M12	30 mm	1.75 mm	8 mm	7 mm	18 mm	5 mm	32.5 g
FBS02G8P12035	M12	35 mm	1.75 mm	8 mm	7 mm	18 mm	5 mm	36.5 g
FBS02G8P12040	M12	40 mm	1.75 mm	8 mm	7 mm	18 mm	5 mm	40 g
FBS02G8P12045	M12	45 mm	1.75 mm	8 mm	7 mm	18 mm	5 mm	44 g
FBS02G8P12050	M12	50 mm	1.75 mm	8 mm	7 mm	18 mm	5 mm	48 g



Part number	Size (d)	Length (l)	Thread pitch	Hex key size (s)	Head height (k)	Head diameter (dk)	Socket depth (t)	Weight
FBS02G8P12055	M12	55 mm	1.75 mm	8 mm	7 mm	18 mm	5 mm	52.5 g
FBS02G8P12060	M12	60 mm	1.75 mm	8 mm	7 mm	18 mm	5 mm	57 g
FBS02G8P12070	M12	70 mm	1.75 mm	8 mm	7 mm	18 mm	5 mm	65 g
FBS02G8P12080	M12	80 mm	1.75 mm	8 mm	7 mm	18 mm	5 mm	72 g
FBS02G8P12090	M12	90 mm	1.75 mm	8 mm	7 mm	18 mm	5 mm	80 g
FBS02G8P12100	M12	100 mm	1.75 mm	8 mm	7 mm	18 mm	5 mm	88 g
FBS02G8P12120	M12	120 mm	1.75 mm	8 mm	7 mm	18 mm	5 mm	104 g
FBS02G8P14030	M14	30 mm	2 mm	10 mm	8 mm	21 mm	5.3 mm	48 g
FBS02G8P14035	M14	35 mm	2 mm	10 mm	8 mm	21 mm	5.3 mm	53 g
FBS02G8P14040	M14	40 mm	2 mm	10 mm	8 mm	21 mm	5.3 mm	58 g
FBS02G8P14045	M14	45 mm	2 mm	10 mm	8 mm	21 mm	5.3 mm	63.75 g
FBS02G8P14050	M14	50 mm	2 mm	10 mm	8 mm	21 mm	5.3 mm	69.5 g
FBS02G8P14055	M14	55 mm	2 mm	10 mm	8 mm	21 mm	5.3 mm	75.75 g
FBS02G8P14060	M14	60 mm	2 mm	10 mm	8 mm	21 mm	5.3 mm	82 g
FBS02G8P14070	M14	70 mm	2 mm	10 mm	8 mm	21 mm	5.3 mm	92.5 g
FBS02G8P14080	M14	80 mm	2 mm	10 mm	8 mm	21 mm	5.3 mm	104 g
FBS02G8P14090	M14	90 mm	2 mm	10 mm	8 mm	21 mm	5.3 mm	116 g
FBS02G8P14100	M14	100 mm	2 mm	10 mm	8 mm	21 mm	5.3 mm	127 g
FBS02G8P16020	M16	20 mm	2 mm	12 mm	9 mm	24 mm	5.5 mm	52.5 g
FBS02G8P16025	M16	25 mm	2 mm	12 mm	9 mm	24 mm	5.5 mm	56.5 g
FBS02G8P16030	M16	30 mm	2 mm	12 mm	9 mm	24 mm	5.5 mm	63 g
FBS02G8P16035	M16	35 mm	2 mm	12 mm	9 mm	24 mm	5.5 mm	69.7 g
FBS02G8P16040	M16	40 mm	2 mm	12 mm	9 mm	24 mm	5.5 mm	78.7 g
FBS02G8P16045	M16	45 mm	2 mm	12 mm	9 mm	24 mm	5.5 mm	85.1 g
FBS02G8P16050	M16	50 mm	2 mm	12 mm	9 mm	24 mm	5.5 mm	91.5 g
FBS02G8P16055	M16	55 mm	2 mm	12 mm	9 mm	24 mm	5.5 mm	99.25 g
FBS02G8P16060	M16	60 mm	2 mm	12 mm	9 mm	24 mm	5.5 mm	107 g
FBS02G8P16070	M16	70 mm	2 mm	12 mm	9 mm	24 mm	5.5 mm	122 g
FBS02G8P16080	M16	80 mm	2 mm	12 mm	9 mm	24 mm	5.5 mm	140 g
FBS02G8P16090	M16	90 mm	2 mm	12 mm	9 mm	24 mm	5.5 mm	154 g
FBS02G8P16100	M16	100 mm	2 mm	12 mm	9 mm	24 mm	5.5 mm	169 g
FBS02G8P16110	M16	110 mm	2 mm	12 mm	9 mm	24 mm	5.5 mm	183 g
FBS02G8P16120	M16	120 mm	2 mm	12 mm	9 mm	24 mm	5.5 mm	198 g
FBS02G8P16130	M16	130 mm	2 mm	12 mm	9 mm	24 mm	5.5 mm	212 g
FBS02G8P16140	M16	140 mm	2 mm	12 mm	9 mm	24 mm	5.5 mm	226 g
FBS02G8P16150	M16	150 mm	2 mm	12 mm	9 mm	24 mm	5.5 mm	240 g
FBS02G8P18050	M18	50 mm	2.5 mm	12 mm	10 mm	27 mm	6.5 mm	119 g



Part number	Size (d)	Length (l)	Thread pitch	Hex key size (s)	Head height (k)	Head diameter (dk)	Socket depth (t)	Weight
FBS02G8P18055	M18	55 mm	2.5 mm	12 mm	10 mm	27 mm	6.5 mm	128.5 g
FBS02G8P18060	M18	60 mm	2.5 mm	12 mm	10 mm	27 mm	6.5 mm	138 g
FBS02G8P18070	M18	70 mm	2.5 mm	12 mm	10 mm	27 mm	6.5 mm	157 g
FBS02G8P18080	M18	80 mm	2.5 mm	12 mm	10 mm	27 mm	6.5 mm	178 g
FBS02G8P18090	M18	90 mm	2.5 mm	12 mm	10 mm	27 mm	6.5 mm	196 g
FBS02G8P18100	M18	100 mm	2.5 mm	12 mm	10 mm	27 mm	6.5 mm	215 g
FBS02G8P20030	M20	30 mm	2.5 mm	14 mm	11 mm	30 mm	7.5 mm	108 g
FBS02G8P20040	M20	40 mm	2.5 mm	14 mm	11 mm	30 mm	7.5 mm	128 g
FBS02G8P20045	M20	45 mm	2.5 mm	14 mm	11 mm	30 mm	7.5 mm	139 g
FBS02G8P20050	M20	50 mm	2.5 mm	14 mm	11 mm	30 mm	7.5 mm	150 g
FBS02G8P20055	M20	55 mm	2.5 mm	14 mm	11 mm	30 mm	7.5 mm	161 g
FBS02G8P20060	M20	60 mm	2.5 mm	14 mm	11 mm	30 mm	7.5 mm	172 g
FBS02G8P20070	M20	70 mm	2.5 mm	14 mm	11 mm	30 mm	7.5 mm	196 g
FBS02G8P20080	M20	80 mm	2.5 mm	14 mm	11 mm	30 mm	7.5 mm	222 g
FBS02G8P20090	M20	90 mm	2.5 mm	14 mm	11 mm	30 mm	7.5 mm	245 g
FBS02G8P20100	M20	100 mm	2.5 mm	14 mm	11 mm	30 mm	7.5 mm	269 g
FBS02G8P22050	M22	50 mm	2.5 mm	14 mm	12 mm	33 mm	8 mm	215 g
FBS02G8P22055	M22	55 mm	2.5 mm	14 mm	12 mm	33 mm	8 mm	230 g
FBS02G8P22060	M22	60 mm	2.5 mm	14 mm	12 mm	33 mm	8 mm	245 g
FBS02G8P22070	M22	70 mm	2.5 mm	14 mm	12 mm	33 mm	8 mm	275 g
FBS02G8P22080	M22	80 mm	2.5 mm	14 mm	12 mm	33 mm	8 mm	305 g
FBS02G8P22090	M22	90 mm	2.5 mm	14 mm	12 mm	33 mm	8 mm	335 g
FBS02G8P22100	M22	100 mm	2.5 mm	14 mm	12 mm	33 mm	8 mm	365 g
FBS02G8P24040	M24	40 mm	3 mm	17 mm	13 mm	36 mm	8 mm	193 g
FBS02G8P24050	M24	50 mm	3 mm	17 mm	13 mm	36 mm	8 mm	228 g
FBS02G8P24055	M24	55 mm	3 mm	17 mm	13 mm	36 mm	8 mm	245.5 g
FBS02G8P24060	M24	60 mm	3 mm	17 mm	13 mm	36 mm	8 mm	263 g
FBS02G8P24070	M24	70 mm	3 mm	17 mm	13 mm	36 mm	8 mm	298 g
FBS02G8P24080	M24	80 mm	3 mm	17 mm	13 mm	36 mm	8 mm	333 g
FBS02G8P24090	M24	90 mm	3 mm	17 mm	13 mm	36 mm	8 mm	369 g
FBS02G8P24095	M24	95 mm	3 mm	17 mm	13 mm	36 mm	8 mm	388 g
FBS02G8P24100	M24	100 mm	3 mm	17 mm	13 mm	36 mm	8 mm	407 g

Part numbers: 187

STANDARDS & CERTIFICATES

Standards

DIN 7984 – Low Head Socket Cap Screw

