


Slotted Cheese Head Screw DIN 84 / ISO 1207 - Steel 4.8, Zinc plated

Slotted Cheese Head Screw to DIN 84 / ISO 1207, in the sizes, grades and finishes listed.

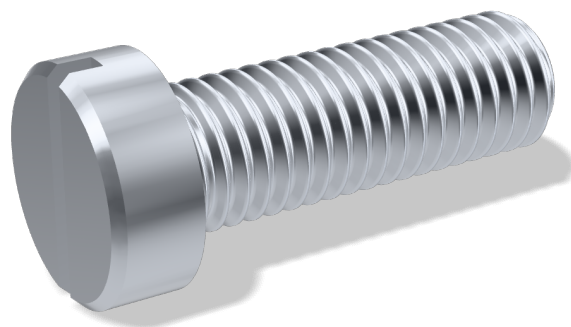

TECHNICAL DATA

Dimensions


Thread form	Metric ISO thread
-------------	-------------------

Materials & Finish

Head type	Cheese
Drive type	Slotted

Property class / grade	4.8
Material	Steel
Surface finish	Zinc plated

DIMENSIONS

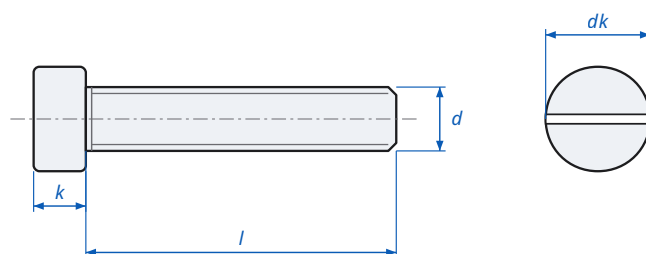

d	Thread diameter
l	Length
k	Head height
dk	Head diameter

Slotted Cheese Head Screw DIN 84 / ISO 1207 - dimensions

AVAILABLE PART NUMBERS

Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Weight
FBC04H4Z02003	M2	3 mm	0.4 mm	1.3 mm	3.8 mm	0.16 g
FBC04H4Z02004	M2	4 mm	0.4 mm	1.3 mm	3.8 mm	0.179 g
FBC04H4Z02005	M2	5 mm	0.4 mm	1.3 mm	3.8 mm	0.198 g
FBC04H4Z02006	M2	6 mm	0.4 mm	1.3 mm	3.8 mm	0.217 g
FBC04H4Z02008	M2	8 mm	0.4 mm	1.3 mm	3.8 mm	0.254 g
FBC04H4Z02010	M2	10 mm	0.4 mm	1.3 mm	3.8 mm	0.291 g
FBC04H4Z02012	M2	12 mm	0.4 mm	1.3 mm	3.8 mm	0.329 g
FBC04H4Z02016	M2	16 mm	0.4 mm	1.3 mm	3.8 mm	0.402 g



Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Weight
FBC04H4Z02018	M2	18 mm	0.4 mm	1.3 mm	3.8 mm	0.44 g
FBC04H4Z02020	M2	20 mm	0.4 mm	1.3 mm	3.8 mm	0.478 g
FBC04H4Z02030	M2	30 mm	0.4 mm	1.3 mm	3.8 mm	0.668 g
FBC04H4ZC5003	M2.5	3 mm	0.45 mm	1.6 mm	4.5 mm	0.272 g
FBC04H4ZC5004	M2.5	4 mm	0.45 mm	1.6 mm	4.5 mm	0.302 g
FBC04H4ZC5005	M2.5	5 mm	0.45 mm	1.6 mm	4.5 mm	0.332 g
FBC04H4ZC5006	M2.5	6 mm	0.45 mm	1.6 mm	4.5 mm	0.362 g
FBC04H4ZC5008	M2.5	8 mm	0.45 mm	1.6 mm	4.5 mm	0.422 g
FBC04H4ZC5010	M2.5	10 mm	0.45 mm	1.6 mm	4.5 mm	0.482 g
FBC04H4ZC5012	M2.5	12 mm	0.45 mm	1.6 mm	4.5 mm	0.542 g
FBC04H4ZC5014	M2.5	14 mm	0.45 mm	1.6 mm	4.5 mm	0.602 g
FBC04H4ZC5016	M2.5	16 mm	0.45 mm	1.6 mm	4.5 mm	0.662 g
FBC04H4ZC5018	M2.5	18 mm	0.45 mm	1.6 mm	4.5 mm	0.722 g
FBC04H4ZC5020	M2.5	20 mm	0.45 mm	1.6 mm	4.5 mm	0.782 g
FBC04H4ZC5025	M2.5	25 mm	0.45 mm	1.6 mm	4.5 mm	0.932 g
FBC04H4ZC5030	M2.5	30 mm	0.45 mm	1.6 mm	4.5 mm	1.082 g
FBC04H4ZC6003	M2.6	3 mm	0.45 mm	–	–	0.34 g
FBC04H4ZC6005	M2.6	5 mm	0.45 mm	–	–	0.405 g
FBC04H4ZC6006	M2.6	6 mm	0.45 mm	–	–	0.438 g
FBC04H4ZC6008	M2.6	8 mm	0.45 mm	–	–	0.504 g
FBC04H4ZC6010	M2.6	10 mm	0.45 mm	–	–	0.57 g
FBC01H4Z03003	M3	3 mm	0.5 mm	2 mm	5.5 mm	0.471 g
FBC01H4Z03004	M3	4 mm	0.5 mm	2 mm	5.5 mm	0.515 g
FBC01H4Z03005	M3	5 mm	0.5 mm	2 mm	5.5 mm	0.56 g
FBC01H4Z03006	M3	6 mm	0.5 mm	2 mm	5.5 mm	0.604 g
FBC01H4Z03008	M3	8 mm	0.5 mm	2 mm	5.5 mm	0.692 g
FBC01H4Z03010	M3	10 mm	0.5 mm	2 mm	5.5 mm	0.78 g
FBC01H4Z03012	M3	12 mm	0.5 mm	2 mm	5.5 mm	0.868 g
FBC01H4Z03014	M3	14 mm	0.5 mm	2 mm	5.5 mm	0.956 g
FBC01H4Z03016	M3	16 mm	0.5 mm	2 mm	5.5 mm	1.04 g
FBC01H4Z03018	M3	18 mm	0.5 mm	2 mm	5.5 mm	1.13 g
FBC01H4Z03020	M3	20 mm	0.5 mm	2 mm	5.5 mm	1.22 g
FBC01H4Z03022	M3	22 mm	0.5 mm	2 mm	5.5 mm	1.31 g
FBC01H4Z03025	M3	25 mm	0.5 mm	2 mm	5.5 mm	1.44 g
FBC01H4Z03028	M3	28 mm	0.5 mm	2 mm	5.5 mm	1.57 g
FBC01H4Z03030	M3	30 mm	0.5 mm	2 mm	5.5 mm	1.66 g
FBC01H4Z03035	M3	35 mm	0.5 mm	2 mm	5.5 mm	1.88 g



Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Weight
FBC01H4Z03040	M3	40 mm	0.5 mm	2 mm	5.5 mm	2.1 g
FBC01H4Z03045	M3	45 mm	0.5 mm	2 mm	5.5 mm	2.32 g
FBC01H4Z03050	M3	50 mm	0.5 mm	2 mm	5.5 mm	2.54 g
FBC01H4Z03055	M3	55 mm	0.5 mm	2 mm	5.5 mm	2.76 g
FBC01H4Z03060	M3	60 mm	0.5 mm	2 mm	5.5 mm	2.98 g
FBC01H4Z03070	M3	70 mm	0.5 mm	2 mm	5.5 mm	3.42 g
FBC01H4ZD5004	M3.5	4 mm	0.6 mm	2.4 mm	6 mm	0.728 g
FBC01H4ZD5005	M3.5	5 mm	0.6 mm	2.4 mm	6 mm	0.786 g
FBC01H4ZD5006	M3.5	6 mm	0.6 mm	2.4 mm	6 mm	0.845 g
FBC01H4ZD5008	M3.5	8 mm	0.6 mm	2.4 mm	6 mm	0.966 g
FBC01H4ZD5010	M3.5	10 mm	0.6 mm	2.4 mm	6 mm	1.08 g
FBC01H4ZD5012	M3.5	12 mm	0.6 mm	2.4 mm	6 mm	1.2 g
FBC01H4ZD5016	M3.5	16 mm	0.6 mm	2.4 mm	6 mm	1.44 g
FBC01H4ZD5018	M3.5	18 mm	0.6 mm	2.4 mm	6 mm	1.56 g
FBC01H4ZD5020	M3.5	20 mm	0.6 mm	2.4 mm	6 mm	1.68 g
FBC01H4ZD5025	M3.5	25 mm	0.6 mm	2.4 mm	6 mm	1.98 g
FBC01H4ZD5030	M3.5	30 mm	0.6 mm	2.4 mm	6 mm	2.28 g
FBC01H4ZD5035	M3.5	35 mm	0.6 mm	2.4 mm	6 mm	2.57 g
FBC01H4ZD5040	M3.5	40 mm	0.6 mm	2.4 mm	6 mm	2.87 g
FBC01H4ZD5045	M3.5	45 mm	0.6 mm	2.4 mm	6 mm	3.17 g
FBC01H4ZD5050	M3.5	50 mm	0.6 mm	2.4 mm	6 mm	3.47 g
FBC01H4Z04004	M4	4 mm	0.7 mm	2.6 mm	7 mm	1.02 g
FBC01H4Z04005	M4	5 mm	0.7 mm	2.6 mm	7 mm	1.09 g
FBC01H4Z04006	M4	6 mm	0.7 mm	2.6 mm	7 mm	1.17 g
FBC01H4Z04008	M4	8 mm	0.7 mm	2.6 mm	7 mm	1.33 g
FBC01H4Z04010	M4	10 mm	0.7 mm	2.6 mm	7 mm	1.47 g
FBC01H4Z04012	M4	12 mm	0.7 mm	2.6 mm	7 mm	1.63 g
FBC01H4Z04014	M4	14 mm	0.7 mm	2.6 mm	7 mm	1.79 g
FBC01H4Z04016	M4	16 mm	0.7 mm	2.6 mm	7 mm	1.95 g
FBC01H4Z04018	M4	18 mm	0.7 mm	2.6 mm	7 mm	2.1 g
FBC01H4Z04020	M4	20 mm	0.7 mm	2.6 mm	7 mm	2.25 g
FBC01H4Z04022	M4	22 mm	0.7 mm	2.6 mm	7 mm	2.4 g
FBC01H4Z04025	M4	25 mm	0.7 mm	2.6 mm	7 mm	2.64 g
FBC01H4Z04028	M4	28 mm	0.7 mm	2.6 mm	7 mm	2.87 g
FBC01H4Z04030	M4	30 mm	0.7 mm	2.6 mm	7 mm	3.02 g
FBC01H4Z04035	M4	35 mm	0.7 mm	2.6 mm	7 mm	3.41 g
FBC01H4Z04040	M4	40 mm	0.7 mm	2.6 mm	7 mm	3.8 g



Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Weight
FBC01H4Z04045	M4	45 mm	0.7 mm	2.6 mm	7 mm	4.17 g
FBC01H4Z04050	M4	50 mm	0.7 mm	2.6 mm	7 mm	4.57 g
FBC01H4Z04055	M4	55 mm	0.7 mm	2.6 mm	7 mm	4.97 g
FBC01H4Z04060	M4	60 mm	0.7 mm	2.6 mm	7 mm	5.37 g
FBC01H4Z04065	M4	65 mm	0.7 mm	2.6 mm	7 mm	5.77 g
FBC01H4Z04070	M4	70 mm	0.7 mm	2.6 mm	7 mm	6.17 g
FBC01H4Z04080	M4	80 mm	0.7 mm	2.6 mm	7 mm	6.97 g
FBC01H4Z04090	M4	90 mm	0.7 mm	2.6 mm	7 mm	7.77 g
FBC01H4Z04100	M4	100 mm	0.7 mm	2.6 mm	7 mm	8.57 g
FBC01H4Z05006	M5	6 mm	0.8 mm	3.3 mm	8.5 mm	2.06 g
FBC01H4Z05008	M5	8 mm	0.8 mm	3.3 mm	8.5 mm	2.2 g
FBC01H4Z05010	M5	10 mm	0.8 mm	3.3 mm	8.5 mm	2.55 g
FBC01H4Z05012	M5	12 mm	0.8 mm	3.3 mm	8.5 mm	2.8 g
FBC01H4Z05014	M5	14 mm	0.8 mm	3.3 mm	8.5 mm	3.05 g
FBC01H4Z05016	M5	16 mm	0.8 mm	3.3 mm	8.5 mm	3.3 g
FBC01H4Z05018	M5	18 mm	0.8 mm	3.3 mm	8.5 mm	3.54 g
FBC01H4Z05020	M5	20 mm	0.8 mm	3.3 mm	8.5 mm	3.78 g
FBC01H4Z05022	M5	22 mm	0.8 mm	3.3 mm	8.5 mm	4.02 g
FBC01H4Z05025	M5	25 mm	0.8 mm	3.3 mm	8.5 mm	4.4 g
FBC01H4Z05030	M5	30 mm	0.8 mm	3.3 mm	8.5 mm	5.02 g
FBC01H4Z05035	M5	35 mm	0.8 mm	3.3 mm	8.5 mm	5.62 g
FBC01H4Z05040	M5	40 mm	0.8 mm	3.3 mm	8.5 mm	6.25 g
FBC01H4Z05045	M5	45 mm	0.8 mm	3.3 mm	8.5 mm	6.88 g
FBC01H4Z05050	M5	50 mm	0.8 mm	3.3 mm	8.5 mm	7.5 g
FBC01H4Z05055	M5	55 mm	0.8 mm	3.3 mm	8.5 mm	8.12 g
FBC01H4Z05060	M5	60 mm	0.8 mm	3.3 mm	8.5 mm	8.74 g
FBC01H4Z05065	M5	65 mm	0.8 mm	3.3 mm	8.5 mm	9.36 g
FBC01H4Z05070	M5	70 mm	0.8 mm	3.3 mm	8.5 mm	9.98 g
FBC01H4Z05080	M5	80 mm	0.8 mm	3.3 mm	8.5 mm	11.22 g
FBC01H4Z05090	M5	90 mm	0.8 mm	3.3 mm	8.5 mm	12.46 g
FBC01H4Z05100	M5	100 mm	0.8 mm	3.3 mm	8.5 mm	13.7 g
FBC01H4Z06006	M6	6 mm	1 mm	3.9 mm	10 mm	3.2 g
FBC01H4Z06008	M6	8 mm	1 mm	3.9 mm	10 mm	3.56 g
FBC01H4Z06010	M6	10 mm	1 mm	3.9 mm	10 mm	3.92 g
FBC01H4Z06012	M6	12 mm	1 mm	3.9 mm	10 mm	4.27 g
FBC01H4Z06014	M6	14 mm	1 mm	3.9 mm	10 mm	4.62 g
FBC01H4Z06016	M6	16 mm	1 mm	3.9 mm	10 mm	4.98 g



Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Weight
FBC01H4Z06018	M6	18 mm	1 mm	3.9 mm	10 mm	5.34 g
FBC01H4Z06020	M6	20 mm	1 mm	3.9 mm	10 mm	5.69 g
FBC01H4Z06022	M6	22 mm	1 mm	3.9 mm	10 mm	6.04 g
FBC01H4Z06025	M6	25 mm	1 mm	3.9 mm	10 mm	6.56 g
FBC01H4Z06030	M6	30 mm	1 mm	3.9 mm	10 mm	7.45 g
FBC01H4Z06035	M6	35 mm	1 mm	3.9 mm	10 mm	8.25 g
FBC01H4Z06040	M6	40 mm	1 mm	3.9 mm	10 mm	9.2 g
FBC01H4Z06045	M6	45 mm	1 mm	3.9 mm	10 mm	10 g
FBC01H4Z06050	M6	50 mm	1 mm	3.9 mm	10 mm	10.9 g
FBC01H4Z06055	M6	55 mm	1 mm	3.9 mm	10 mm	11.8 g
FBC01H4Z06060	M6	60 mm	1 mm	3.9 mm	10 mm	12.7 g
FBC01H4Z06065	M6	65 mm	1 mm	3.9 mm	10 mm	13.6 g
FBC01H4Z06070	M6	70 mm	1 mm	3.9 mm	10 mm	14.5 g
FBC01H4Z06080	M6	80 mm	1 mm	3.9 mm	10 mm	16.3 g
FBC01H4Z06090	M6	90 mm	1 mm	3.9 mm	10 mm	18.1 g
FBC01H4Z06100	M6	100 mm	1 mm	3.9 mm	10 mm	19.9 g
FBC01H4Z08010	M8	10 mm	1.25 mm	5 mm	13 mm	7.85 g
FBC01H4Z08012	M8	12 mm	1.25 mm	5 mm	13 mm	8.49 g
FBC01H4Z08016	M8	16 mm	1.25 mm	5 mm	13 mm	9.77 g
FBC01H4Z08018	M8	18 mm	1.25 mm	5 mm	13 mm	10.4 g
FBC01H4Z08020	M8	20 mm	1.25 mm	5 mm	13 mm	11 g
FBC01H4Z08025	M8	25 mm	1.25 mm	5 mm	13 mm	12.6 g
FBC01H4Z08030	M8	30 mm	1.25 mm	5 mm	13 mm	14.2 g
FBC01H4Z08035	M8	35 mm	1.25 mm	5 mm	13 mm	15.8 g
FBC01H4Z08040	M8	40 mm	1.25 mm	5 mm	13 mm	17.4 g
FBC01H4Z08045	M8	45 mm	1.25 mm	5 mm	13 mm	18.9 g
FBC01H4Z08050	M8	50 mm	1.25 mm	5 mm	13 mm	20.6 g
FBC01H4Z08055	M8	55 mm	1.25 mm	5 mm	13 mm	22.1 g
FBC01H4Z08060	M8	60 mm	1.25 mm	5 mm	13 mm	23.6 g
FBC01H4Z08070	M8	70 mm	1.25 mm	5 mm	13 mm	26.6 g
FBC01H4Z08090	M8	90 mm	1.25 mm	5 mm	13 mm	32.6 g
FBC01H4Z08100	M8	100 mm	1.25 mm	5 mm	13 mm	35.6 g
FBC01H4Z10012	M10	12 mm	1.5 mm	6 mm	16 mm	14.6 g
FBC01H4Z10016	M10	16 mm	1.5 mm	6 mm	16 mm	16.6 g
FBC01H4Z10020	M10	20 mm	1.5 mm	6 mm	16 mm	18.6 g
FBC01H4Z10025	M10	25 mm	1.5 mm	6 mm	16 mm	21.1 g
FBC01H4Z10030	M10	30 mm	1.5 mm	6 mm	16 mm	23.6 g



Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Weight
FBC01H4Z10035	M10	35 mm	1.5 mm	6 mm	16 mm	26.1 g
FBC01H4Z10040	M10	40 mm	1.5 mm	6 mm	16 mm	28.6 g
FBC01H4Z10050	M10	50 mm	1.5 mm	6 mm	16 mm	33.6 g
FBC01H4Z10060	M10	60 mm	1.5 mm	6 mm	16 mm	38.6 g
FBC01H4Z10070	M10	70 mm	1.5 mm	6 mm	16 mm	43.6 g
FBC01H4Z10080	M10	80 mm	1.5 mm	6 mm	16 mm	48.6 g
FBC01H4Z10100	M10	100 mm	1.5 mm	6 mm	16 mm	58.6 g

Part numbers: 163

STANDARDS & CERTIFICATES

Standards

DIN 84 – Slotted Cheese Head Screw

ISO 1207 – Slotted Cheese Head Screw

