


Slotted Cheese Head Screw DIN 84 / ISO 1207 - Stainless steel A2, Plain

Slotted Cheese Head Screw to DIN 84 / ISO 1207, in the sizes, grades and finishes listed.

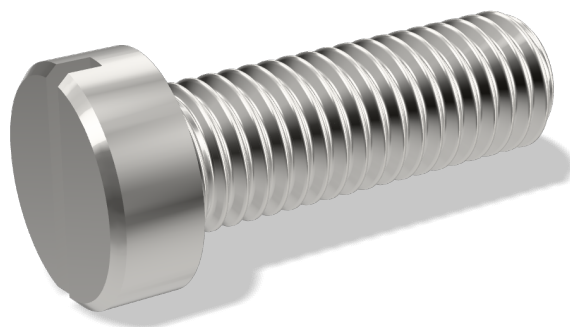

TECHNICAL DATA

Dimensions


Thread form	Metric ISO thread
-------------	-------------------

Materials & Finish

Head type	Cheese
Drive type	Slotted

Property class / grade	A2 stainless
Material	Stainless steel
Surface finish	Plain

DIMENSIONS

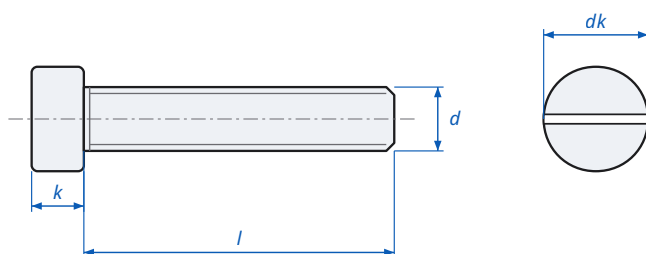

d	Thread diameter
l	Length
k	Head height
dk	Head diameter

Slotted Cheese Head Screw DIN 84 / ISO 1207 - dimensions

AVAILABLE PART NUMBERS

Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Weight
FBC04A2P01002	M1	2 mm	0.25 mm	0.7 mm	2 mm	0.0253 g
FBC04A2P01003	M1	3 mm	0.25 mm	0.7 mm	2 mm	0.0303 g
FBC04A2P01004	M1	4 mm	0.25 mm	0.7 mm	2 mm	0.0354 g
FBC04A2P01005	M1	5 mm	0.25 mm	0.7 mm	2 mm	0.0404 g
FBC04A2P01006	M1	6 mm	0.25 mm	0.7 mm	2 mm	0.0454 g
FBC04A2P01008	M1	8 mm	0.25 mm	0.7 mm	2 mm	0.0556 g
FBC04A2P01010	M1	10 mm	0.25 mm	0.7 mm	2 mm	0.0657 g
FBC04A2PB2002	M1.2	2 mm	0.25 mm	0.8 mm	2.3 mm	0.0384 g



Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Weight
FBC04A2PB2003	M1.2	3 mm	0.25 mm	0.8 mm	2.3 mm	0.0454 g
FBC04A2PB2004	M1.2	4 mm	0.25 mm	0.8 mm	2.3 mm	0.0525 g
FBC04A2PB2005	M1.2	5 mm	0.25 mm	0.8 mm	2.3 mm	0.0596 g
FBC04A2PB2006	M1.2	6 mm	0.25 mm	0.8 mm	2.3 mm	0.0677 g
FBC04A2PB2008	M1.2	8 mm	0.25 mm	0.8 mm	2.3 mm	0.0838 g
FBC04A2PB2010	M1.2	10 mm	0.25 mm	0.8 mm	2.3 mm	0.1 g
FBC04A2PB2012	M1.2	12 mm	0.25 mm	0.8 mm	2.3 mm	0.1162 g
FBC04A2PB4002	M1.4	2 mm	0.3 mm	0.9 mm	2.6 mm	0.0535 g
FBC04A2PB4003	M1.4	3 mm	0.3 mm	0.9 mm	2.6 mm	0.0626 g
FBC04A2PB4004	M1.4	4 mm	0.3 mm	0.9 mm	2.6 mm	0.0717 g
FBC04A2PB4005	M1.4	5 mm	0.3 mm	0.9 mm	2.6 mm	0.0808 g
FBC04A2PB4006	M1.4	6 mm	0.3 mm	0.9 mm	2.6 mm	0.0899 g
FBC04A2PB4008	M1.4	8 mm	0.3 mm	0.9 mm	2.6 mm	0.1071 g
FBC04A2PB4010	M1.4	10 mm	0.3 mm	0.9 mm	2.6 mm	0.1252 g
FBC04A2PB4012	M1.4	12 mm	0.3 mm	0.9 mm	2.6 mm	0.1434 g
FBC04A2PB6002	M1.6	2 mm	0.35 mm	1 mm	3 mm	0.0707 g
FBC04A2PB6003	M1.6	3 mm	0.35 mm	1 mm	3 mm	0.0828 g
FBC04A2PB6004	M1.6	4 mm	0.35 mm	1 mm	3 mm	0.0949 g
FBC04A2PB6005	M1.6	5 mm	0.35 mm	1 mm	3 mm	0.106 g
FBC04A2PB6006	M1.6	6 mm	0.35 mm	1 mm	3 mm	0.1182 g
FBC04A2PB6008	M1.6	8 mm	0.35 mm	1 mm	3 mm	0.1414 g
FBC04A2PB6010	M1.6	10 mm	0.35 mm	1 mm	3 mm	0.1646 g
FBC04A2PB6012	M1.6	12 mm	0.35 mm	1 mm	3 mm	0.1879 g
FBC04A2PB6014	M1.6	14 mm	0.35 mm	1 mm	3 mm	0.2111 g
FBC04A2PB6016	M1.6	16 mm	0.35 mm	1 mm	3 mm	0.2343 g
FBC04A2PB6018	M1.6	18 mm	0.35 mm	1 mm	3 mm	0.2576 g
FBC04A2PB6020	M1.6	20 mm	0.35 mm	1 mm	3 mm	0.2808 g
FBC04A2PB7003	M1.7	3 mm	0.35 mm	–	–	–
FBC04A2PB7005	M1.7	5 mm	0.35 mm	–	–	–
FBC04A2PB7010	M1.7	10 mm	0.35 mm	–	–	–
FBC04A2P02003	M2	3 mm	0.4 mm	1.3 mm	3.8 mm	0.1616 g
FBC04A2P02004	M2	4 mm	0.4 mm	1.3 mm	3.8 mm	0.1808 g
FBC04A2P02005	M2	5 mm	0.4 mm	1.3 mm	3.8 mm	0.2 g
FBC04A2P02006	M2	6 mm	0.4 mm	1.3 mm	3.8 mm	0.2192 g
FBC04A2P02008	M2	8 mm	0.4 mm	1.3 mm	3.8 mm	0.2565 g
FBC04A2P02010	M2	10 mm	0.4 mm	1.3 mm	3.8 mm	0.2939 g
FBC04A2P02012	M2	12 mm	0.4 mm	1.3 mm	3.8 mm	0.3323 g



Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Weight
FBC04A2P02014	M2	14 mm	0.4 mm	1.3 mm	3.8 mm	0.3686 g
FBC04A2P02016	M2	16 mm	0.4 mm	1.3 mm	3.8 mm	0.406 g
FBC04A2P02018	M2	18 mm	0.4 mm	1.3 mm	3.8 mm	0.4444 g
FBC04A2P02020	M2	20 mm	0.4 mm	1.3 mm	3.8 mm	0.4828 g
FBC04A2P02022	M2	22 mm	0.4 mm	1.3 mm	3.8 mm	0.5212 g
FBC04A2P02025	M2	25 mm	0.4 mm	1.3 mm	3.8 mm	0.5787 g
FBC04A2P02028	M2	28 mm	0.4 mm	1.3 mm	3.8 mm	0.6363 g
FBC04A2P02030	M2	30 mm	0.4 mm	1.3 mm	3.8 mm	0.6747 g
FBC04A2P02035	M2	35 mm	0.4 mm	1.3 mm	3.8 mm	0.7706 g
FBC04A2P02040	M2	40 mm	0.4 mm	1.3 mm	3.8 mm	0.8666 g
FBC04A2PC3003	M2.3	3 mm	0.4 mm	–	–	0.2424 g
FBC04A2PC3004	M2.3	4 mm	0.4 mm	–	–	0.2778 g
FBC04A2PC3005	M2.3	5 mm	0.4 mm	–	–	0.2929 g
FBC04A2PC3006	M2.3	6 mm	0.4 mm	–	–	0.3192 g
FBC04A2PC3008	M2.3	8 mm	0.4 mm	–	–	0.3717 g
FBC04A2PC3010	M2.3	10 mm	0.4 mm	–	–	0.4232 g
FBC04A2PC3012	M2.3	12 mm	0.4 mm	–	–	0.4757 g
FBC04A2PC3014	M2.3	14 mm	0.4 mm	–	–	0.5282 g
FBC04A2PC3016	M2.3	16 mm	0.4 mm	–	–	0.5807 g
FBC04A2PC3018	M2.3	18 mm	0.4 mm	–	–	0.6312 g
FBC04A2PC3020	M2.3	20 mm	0.4 mm	–	–	0.6828 g
FBC04A2PC3022	M2.3	22 mm	0.4 mm	–	–	0.7343 g
FBC04A2PC5003	M2.5	3 mm	0.45 mm	1.6 mm	4.5 mm	0.2747 g
FBC04A2PC5004	M2.5	4 mm	0.45 mm	1.6 mm	4.5 mm	0.305 g
FBC04A2PC5005	M2.5	5 mm	0.45 mm	1.6 mm	4.5 mm	0.3353 g
FBC04A2PC5006	M2.5	6 mm	0.45 mm	1.6 mm	4.5 mm	0.3656 g
FBC04A2PC5008	M2.5	8 mm	0.45 mm	1.6 mm	4.5 mm	0.4262 g
FBC04A2PC5010	M2.5	10 mm	0.45 mm	1.6 mm	4.5 mm	0.4868 g
FBC04A2PC5012	M2.5	12 mm	0.45 mm	1.6 mm	4.5 mm	0.5474 g
FBC04A2PC5014	M2.5	14 mm	0.45 mm	1.6 mm	4.5 mm	0.608 g
FBC04A2PC5016	M2.5	16 mm	0.45 mm	1.6 mm	4.5 mm	0.6686 g
FBC04A2PC5018	M2.5	18 mm	0.45 mm	1.6 mm	4.5 mm	0.7292 g
FBC04A2PC5020	M2.5	20 mm	0.45 mm	1.6 mm	4.5 mm	0.7898 g
FBC04A2PC5022	M2.5	22 mm	0.45 mm	1.6 mm	4.5 mm	0.8504 g
FBC04A2PC5025	M2.5	25 mm	0.45 mm	1.6 mm	4.5 mm	0.9413 g
FBC04A2PC5028	M2.5	28 mm	0.45 mm	1.6 mm	4.5 mm	1.032 g
FBC04A2PC5030	M2.5	30 mm	0.45 mm	1.6 mm	4.5 mm	1.093 g



Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Weight
FBC04A2PC5035	M2.5	35 mm	0.45 mm	1.6 mm	4.5 mm	1.244 g
FBC04A2PC5040	M2.5	40 mm	0.45 mm	1.6 mm	4.5 mm	1.396 g
FBC04A2PC6003	M2.6	3 mm	0.45 mm	–	–	0.3434 g
FBC04A2PC6004	M2.6	4 mm	0.45 mm	–	–	0.3767 g
FBC04A2PC6005	M2.6	5 mm	0.45 mm	–	–	0.4091 g
FBC04A2PC6006	M2.6	6 mm	0.45 mm	–	–	0.4424 g
FBC04A2PC6008	M2.6	8 mm	0.45 mm	–	–	0.509 g
FBC04A2PC6010	M2.6	10 mm	0.45 mm	–	–	0.5757 g
FBC04A2PC6012	M2.6	12 mm	0.45 mm	–	–	0.6413 g
FBC04A2PC6016	M2.6	16 mm	0.45 mm	–	–	0.7727 g
FBC04A2PC6020	M2.6	20 mm	0.45 mm	–	–	0.913 g
FBC01A2P03003	M3	3 mm	0.5 mm	2 mm	5.5 mm	0.4757 g
FBC01A2P03004	M3	4 mm	0.5 mm	2 mm	5.5 mm	0.5202 g
FBC01A2P03005	M3	5 mm	0.5 mm	2 mm	5.5 mm	0.5656 g
FBC01A2P03006	M3	6 mm	0.5 mm	2 mm	5.5 mm	0.61 g
FBC01A2P03008	M3	8 mm	0.5 mm	2 mm	5.5 mm	0.6989 g
FBC01A2P03010	M3	10 mm	0.5 mm	2 mm	5.5 mm	0.7878 g
FBC01A2P03012	M3	12 mm	0.5 mm	2 mm	5.5 mm	0.8767 g
FBC01A2P03014	M3	14 mm	0.5 mm	2 mm	5.5 mm	0.9656 g
FBC01A2P03016	M3	16 mm	0.5 mm	2 mm	5.5 mm	1.05 g
FBC01A2P03018	M3	18 mm	0.5 mm	2 mm	5.5 mm	1.141 g
FBC01A2P03020	M3	20 mm	0.5 mm	2 mm	5.5 mm	1.232 g
FBC01A2P03022	M3	22 mm	0.5 mm	2 mm	5.5 mm	1.323 g
FBC01A2P03025	M3	25 mm	0.5 mm	2 mm	5.5 mm	1.454 g
FBC01A2P03028	M3	28 mm	0.5 mm	2 mm	5.5 mm	1.586 g
FBC01A2P03030	M3	30 mm	0.5 mm	2 mm	5.5 mm	1.677 g
FBC01A2P03035	M3	35 mm	0.5 mm	2 mm	5.5 mm	1.899 g
FBC01A2P03040	M3	40 mm	0.5 mm	2 mm	5.5 mm	2.121 g
FBC01A2P03045	M3	45 mm	0.5 mm	2 mm	5.5 mm	2.343 g
FBC01A2P03050	M3	50 mm	0.5 mm	2 mm	5.5 mm	2.565 g
FBC01A2P03055	M3	55 mm	0.5 mm	2 mm	5.5 mm	2.788 g
FBC01A2P03060	M3	60 mm	0.5 mm	2 mm	5.5 mm	3.01 g
FBC01A2PD5004	M3.5	4 mm	0.6 mm	2.4 mm	6 mm	0.7353 g
FBC01A2PD5005	M3.5	5 mm	0.6 mm	2.4 mm	6 mm	0.7939 g
FBC01A2PD5006	M3.5	6 mm	0.6 mm	2.4 mm	6 mm	0.8534 g
FBC01A2PD5008	M3.5	8 mm	0.6 mm	2.4 mm	6 mm	0.9757 g
FBC01A2PD5010	M3.5	10 mm	0.6 mm	2.4 mm	6 mm	1.091 g



Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Weight
FBC01A2PD5012	M3.5	12 mm	0.6 mm	2.4 mm	6 mm	1.212 g
FBC01A2PD5014	M3.5	14 mm	0.6 mm	2.4 mm	6 mm	1.333 g
FBC01A2PD5016	M3.5	16 mm	0.6 mm	2.4 mm	6 mm	1.454 g
FBC01A2PD5018	M3.5	18 mm	0.6 mm	2.4 mm	6 mm	1.576 g
FBC01A2PD5020	M3.5	20 mm	0.6 mm	2.4 mm	6 mm	1.697 g
FBC01A2PD5022	M3.5	22 mm	0.6 mm	2.4 mm	6 mm	1.818 g
FBC01A2PD5025	M3.5	25 mm	0.6 mm	2.4 mm	6 mm	2 g
FBC01A2PD5028	M3.5	28 mm	0.6 mm	2.4 mm	6 mm	2.182 g
FBC01A2PD5030	M3.5	30 mm	0.6 mm	2.4 mm	6 mm	2.303 g
FBC01A2PD5035	M3.5	35 mm	0.6 mm	2.4 mm	6 mm	2.596 g
FBC01A2PD5040	M3.5	40 mm	0.6 mm	2.4 mm	6 mm	2.899 g
FBC01A2PD5045	M3.5	45 mm	0.6 mm	2.4 mm	6 mm	3.202 g
FBC01A2PD5050	M3.5	50 mm	0.6 mm	2.4 mm	6 mm	3.505 g
FBC01A2PD5055	M3.5	55 mm	0.6 mm	2.4 mm	6 mm	3.808 g
FBC01A2PD5060	M3.5	60 mm	0.6 mm	2.4 mm	6 mm	4.111 g
FBC01A2P04004	M4	4 mm	0.7 mm	2.6 mm	7 mm	1.03 g
FBC01A2P04005	M4	5 mm	0.7 mm	2.6 mm	7 mm	1.101 g
FBC01A2P04006	M4	6 mm	0.7 mm	2.6 mm	7 mm	1.182 g
FBC01A2P04008	M4	8 mm	0.7 mm	2.6 mm	7 mm	1.343 g
FBC01A2P04010	M4	10 mm	0.7 mm	2.6 mm	7 mm	1.485 g
FBC01A2P04012	M4	12 mm	0.7 mm	2.6 mm	7 mm	1.646 g
FBC01A2P04014	M4	14 mm	0.7 mm	2.6 mm	7 mm	1.808 g
FBC01A2P04016	M4	16 mm	0.7 mm	2.6 mm	7 mm	1.97 g
FBC01A2P04018	M4	18 mm	0.7 mm	2.6 mm	7 mm	2.121 g
FBC01A2P04020	M4	20 mm	0.7 mm	2.6 mm	7 mm	2.272 g
FBC01A2P04022	M4	22 mm	0.7 mm	2.6 mm	7 mm	2.424 g
FBC01A2P04025	M4	25 mm	0.7 mm	2.6 mm	7 mm	2.666 g
FBC01A2P04028	M4	28 mm	0.7 mm	2.6 mm	7 mm	2.899 g
FBC01A2P04030	M4	30 mm	0.7 mm	2.6 mm	7 mm	3.05 g
FBC01A2P04035	M4	35 mm	0.7 mm	2.6 mm	7 mm	3.444 g
FBC01A2P04040	M4	40 mm	0.7 mm	2.6 mm	7 mm	3.838 g
FBC01A2P04045	M4	45 mm	0.7 mm	2.6 mm	7 mm	4.212 g
FBC01A2P04050	M4	50 mm	0.7 mm	2.6 mm	7 mm	4.616 g
FBC01A2P04055	M4	55 mm	0.7 mm	2.6 mm	7 mm	5.02 g
FBC01A2P04060	M4	60 mm	0.7 mm	2.6 mm	7 mm	5.424 g
FBC01A2P04065	M4	65 mm	0.7 mm	2.6 mm	7 mm	5.828 g
FBC01A2P04070	M4	70 mm	0.7 mm	2.6 mm	7 mm	6.232 g



Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Weight
FBC01A2P04075	M4	75 mm	0.7 mm	2.6 mm	7 mm	6.636 g
FBC01A2P04080	M4	80 mm	0.7 mm	2.6 mm	7 mm	7.04 g
FBC01A2P04085	M4	85 mm	0.7 mm	2.6 mm	7 mm	7.444 g
FBC01A2P04090	M4	90 mm	0.7 mm	2.6 mm	7 mm	7.848 g
FBC01A2P04100	M4	100 mm	0.7 mm	2.6 mm	7 mm	8.656 g
FBC01A2P05006	M5	6 mm	0.8 mm	3.3 mm	8.5 mm	2.081 g
FBC01A2P05008	M5	8 mm	0.8 mm	3.3 mm	8.5 mm	2.222 g
FBC01A2P05010	M5	10 mm	0.8 mm	3.3 mm	8.5 mm	2.575 g
FBC01A2P05012	M5	12 mm	0.8 mm	3.3 mm	8.5 mm	2.828 g
FBC01A2P05014	M5	14 mm	0.8 mm	3.3 mm	8.5 mm	3.08 g
FBC01A2P05016	M5	16 mm	0.8 mm	3.3 mm	8.5 mm	3.333 g
FBC01A2P05018	M5	18 mm	0.8 mm	3.3 mm	8.5 mm	3.575 g
FBC01A2P05020	M5	20 mm	0.8 mm	3.3 mm	8.5 mm	3.818 g
FBC01A2P05022	M5	22 mm	0.8 mm	3.3 mm	8.5 mm	4.06 g
FBC01A2P05025	M5	25 mm	0.8 mm	3.3 mm	8.5 mm	4.444 g
FBC01A2P05028	M5	28 mm	0.8 mm	3.3 mm	8.5 mm	4.717 g
FBC01A2P05030	M5	30 mm	0.8 mm	3.3 mm	8.5 mm	5.07 g
FBC01A2P05035	M5	35 mm	0.8 mm	3.3 mm	8.5 mm	5.676 g
FBC01A2P05040	M5	40 mm	0.8 mm	3.3 mm	8.5 mm	6.312 g
FBC01A2P05045	M5	45 mm	0.8 mm	3.3 mm	8.5 mm	6.949 g
FBC01A2P05050	M5	50 mm	0.8 mm	3.3 mm	8.5 mm	7.575 g
FBC01A2P05055	M5	55 mm	0.8 mm	3.3 mm	8.5 mm	8.201 g
FBC01A2P05060	M5	60 mm	0.8 mm	3.3 mm	8.5 mm	8.827 g
FBC01A2P05065	M5	65 mm	0.8 mm	3.3 mm	8.5 mm	9.454 g
FBC01A2P05070	M5	70 mm	0.8 mm	3.3 mm	8.5 mm	10.08 g
FBC01A2P05075	M5	75 mm	0.8 mm	3.3 mm	8.5 mm	10.706 g
FBC01A2P05080	M5	80 mm	0.8 mm	3.3 mm	8.5 mm	11.332 g
FBC01A2P05085	M5	85 mm	0.8 mm	3.3 mm	8.5 mm	11.958 g
FBC01A2P05090	M5	90 mm	0.8 mm	3.3 mm	8.5 mm	12.585 g
FBC01A2P05095	M5	95 mm	0.8 mm	3.3 mm	8.5 mm	13.211 g
FBC01A2P05100	M5	100 mm	0.8 mm	3.3 mm	8.5 mm	13.837 g
FBC01A2P05120	M5	120 mm	0.8 mm	3.3 mm	8.5 mm	16.342 g
FBC01A2P06006	M6	6 mm	1 mm	3.9 mm	10 mm	3.232 g
FBC01A2P06008	M6	8 mm	1 mm	3.9 mm	10 mm	3.596 g
FBC01A2P06010	M6	10 mm	1 mm	3.9 mm	10 mm	3.959 g
FBC01A2P06012	M6	12 mm	1 mm	3.9 mm	10 mm	4.313 g
FBC01A2P06014	M6	14 mm	1 mm	3.9 mm	10 mm	4.666 g



Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Weight
FBC01A2P06016	M6	16 mm	1 mm	3.9 mm	10 mm	5.03 g
FBC01A2P06018	M6	18 mm	1 mm	3.9 mm	10 mm	5.393 g
FBC01A2P06020	M6	20 mm	1 mm	3.9 mm	10 mm	5.747 g
FBC01A2P06022	M6	22 mm	1 mm	3.9 mm	10 mm	6.1 g
FBC01A2P06025	M6	25 mm	1 mm	3.9 mm	10 mm	6.626 g
FBC01A2P06028	M6	28 mm	1 mm	3.9 mm	10 mm	7.171 g
FBC01A2P06030	M6	30 mm	1 mm	3.9 mm	10 mm	7.525 g
FBC01A2P06035	M6	35 mm	1 mm	3.9 mm	10 mm	8.332 g
FBC01A2P06040	M6	40 mm	1 mm	3.9 mm	10 mm	9.292 g
FBC01A2P06045	M6	45 mm	1 mm	3.9 mm	10 mm	10.1 g
FBC01A2P06050	M6	50 mm	1 mm	3.9 mm	10 mm	11.009 g
FBC01A2P06055	M6	55 mm	1 mm	3.9 mm	10 mm	11.918 g
FBC01A2P06060	M6	60 mm	1 mm	3.9 mm	10 mm	12.827 g
FBC01A2P06065	M6	65 mm	1 mm	3.9 mm	10 mm	13.736 g
FBC01A2P06070	M6	70 mm	1 mm	3.9 mm	10 mm	14.645 g
FBC01A2P06075	M6	75 mm	1 mm	3.9 mm	10 mm	15.554 g
FBC01A2P06080	M6	80 mm	1 mm	3.9 mm	10 mm	16.463 g
FBC01A2P06085	M6	85 mm	1 mm	3.9 mm	10 mm	17.372 g
FBC01A2P06090	M6	90 mm	1 mm	3.9 mm	10 mm	18.281 g
FBC01A2P06100	M6	100 mm	1 mm	3.9 mm	10 mm	20.099 g
FBC01A2P06110	M6	110 mm	1 mm	3.9 mm	10 mm	21.917 g
FBC01A2P06120	M6	120 mm	1 mm	3.9 mm	10 mm	23.735 g
FBC01A2P06130	M6	130 mm	1 mm	3.9 mm	10 mm	25.553 g
FBC01A2P06140	M6	140 mm	1 mm	3.9 mm	10 mm	27.371 g
FBC01A2P08010	M8	10 mm	1.25 mm	5 mm	13 mm	7.928 g
FBC01A2P08012	M8	12 mm	1.25 mm	5 mm	13 mm	8.575 g
FBC01A2P08016	M8	16 mm	1.25 mm	5 mm	13 mm	9.868 g
FBC01A2P08018	M8	18 mm	1.25 mm	5 mm	13 mm	10.504 g
FBC01A2P08020	M8	20 mm	1.25 mm	5 mm	13 mm	11.11 g
FBC01A2P08025	M8	25 mm	1.25 mm	5 mm	13 mm	12.726 g
FBC01A2P08030	M8	30 mm	1.25 mm	5 mm	13 mm	14.342 g
FBC01A2P08035	M8	35 mm	1.25 mm	5 mm	13 mm	15.958 g
FBC01A2P08040	M8	40 mm	1.25 mm	5 mm	13 mm	17.574 g
FBC01A2P08045	M8	45 mm	1.25 mm	5 mm	13 mm	19.089 g
FBC01A2P08050	M8	50 mm	1.25 mm	5 mm	13 mm	20.806 g
FBC01A2P08060	M8	60 mm	1.25 mm	5 mm	13 mm	23.836 g
FBC01A2P08070	M8	70 mm	1.25 mm	5 mm	13 mm	26.866 g



Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Weight
FBC01A2P08080	M8	80 mm	1.25 mm	5 mm	13 mm	29.896 g
FBC01A2P08090	M8	90 mm	1.25 mm	5 mm	13 mm	32.926 g
FBC01A2P08100	M8	100 mm	1.25 mm	5 mm	13 mm	35.956 g
FBC01A2P10012	M10	12 mm	1.5 mm	6 mm	16 mm	14.746 g
FBC01A2P10016	M10	16 mm	1.5 mm	6 mm	16 mm	16.766 g
FBC01A2P10020	M10	20 mm	1.5 mm	6 mm	16 mm	18.786 g
FBC01A2P10025	M10	25 mm	1.5 mm	6 mm	16 mm	21.311 g
FBC01A2P10030	M10	30 mm	1.5 mm	6 mm	16 mm	23.836 g
FBC01A2P10035	M10	35 mm	1.5 mm	6 mm	16 mm	26.361 g
FBC01A2P10040	M10	40 mm	1.5 mm	6 mm	16 mm	28.886 g
FBC01A2P10045	M10	45 mm	1.5 mm	6 mm	16 mm	31.411 g
FBC01A2P10050	M10	50 mm	1.5 mm	6 mm	16 mm	33.936 g
FBC01A2P10060	M10	60 mm	1.5 mm	6 mm	16 mm	38.986 g
FBC01A2P10070	M10	70 mm	1.5 mm	6 mm	16 mm	44.036 g
FBC01A2P10080	M10	80 mm	1.5 mm	6 mm	16 mm	49.086 g
FBC01A2P10090	M10	90 mm	1.5 mm	6 mm	16 mm	54.136 g
FBC01A2P10100	M10	100 mm	1.5 mm	6 mm	16 mm	59.186 g

Part numbers: 247

STANDARDS & CERTIFICATES

Standards

DIN 84 – Slotted Cheese Head Screw

ISO 1207 – Slotted Cheese Head Screw

