


Hex Socket Head Cap Screw DIN 912 / ISO 4762 / ISO 12474 - Steel 12.9, Zinc plated

Hex Socket Head Cap Screw to DIN 912 / ISO 4762 / ISO 12474, in the sizes, grades and finishes listed.

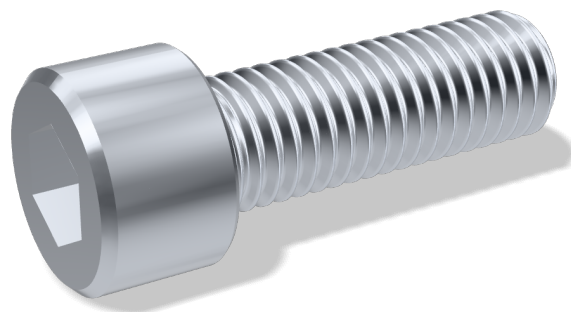


TECHNICAL DATA

Materials & Finish

Head type	Socket cap
Drive type	Hexagon socket
Property class / grade	12.9

Material	Steel
Surface finish	Zinc plated

DIMENSIONS

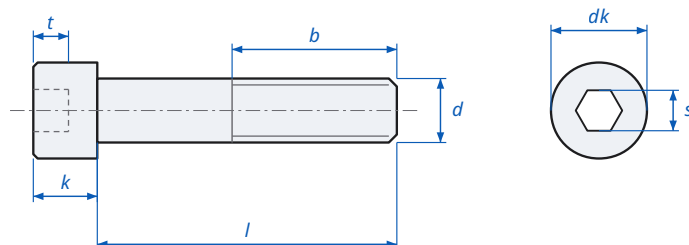

d	Thread diameter
l	Length
b	Thread length
k	Head height
dk	Head diameter
s	Hex key size
t	Socket depth

Hex Socket Head Cap Screw DIN 912 / ISO 4762 / ISO 12474 - dimensions

AVAILABLE PART NUMBERS

Part number	Size (d)	Length (l)	Thread pitch	Hex key size (s)	Head height (k)	Head diameter (dk)	Thread length (b)	Socket depth (t)	Weight
FBS01G2ZB6012	M1.6	12 mm	0.35 mm	1.5 mm	1.6 mm	3 mm	12 mm	0.7 mm	0.2185 g
FBS01G2Z02003	M2	3 mm	0.4 mm	1.5 mm	2 mm	3.8 mm	3 mm	1 mm	0.155 g
FBS01G2Z02004	M2	4 mm	0.4 mm	1.5 mm	2 mm	3.8 mm	4 mm	1 mm	0.175 g
FBS01G2Z02005	M2	5 mm	0.4 mm	1.5 mm	2 mm	3.8 mm	5 mm	1 mm	0.195 g
FBS01G2Z02006	M2	6 mm	0.4 mm	1.5 mm	2 mm	3.8 mm	6 mm	1 mm	0.215 g
FBS01G2Z02008	M2	8 mm	0.4 mm	1.5 mm	2 mm	3.8 mm	8 mm	1 mm	0.255 g
FBS01G2Z02010	M2	10 mm	0.4 mm	1.5 mm	2 mm	3.8 mm	10 mm	1 mm	0.295 g



Part number	Size (d)	Length (l)	Thread pitch	Hex key size (s)	Head height (k)	Head diameter (dk)	Thread length (b)	Socket depth (t)	Weight
FBS01G2Z02012	M2	12 mm	0.4 mm	1.5 mm	2 mm	3.8 mm	12 mm	1 mm	0.355 g
FBS01G2Z02016	M2	16 mm	0.4 mm	1.5 mm	2 mm	3.8 mm	16 mm	1 mm	0.415 g
FBS01G2ZC5004	M2.5	4 mm	0.45 mm	2 mm	2.5 mm	4.5 mm	4 mm	1.1 mm	0.345 g
FBS01G2ZC5005	M2.5	5 mm	0.45 mm	2 mm	2.5 mm	4.5 mm	5 mm	1.1 mm	0.375 g
FBS01G2ZC5006	M2.5	6 mm	0.45 mm	2 mm	2.5 mm	4.5 mm	6 mm	1.1 mm	0.405 g
FBS01G2ZC5008	M2.5	8 mm	0.45 mm	2 mm	2.5 mm	4.5 mm	8 mm	1.1 mm	0.465 g
FBS01G2ZC5010	M2.5	10 mm	0.45 mm	2 mm	2.5 mm	4.5 mm	10 mm	1.1 mm	0.525 g
FBS01G2ZC5012	M2.5	12 mm	0.45 mm	2 mm	2.5 mm	4.5 mm	12 mm	1.1 mm	0.585 g
FBS01G2ZC5016	M2.5	16 mm	0.45 mm	2 mm	2.5 mm	4.5 mm	16 mm	1.1 mm	0.705 g
FBS01G2ZC5020	M2.5	20 mm	0.45 mm	2 mm	2.5 mm	4.5 mm	17 mm	1.1 mm	0.825 g
FBS01G2Z03004	M3	4 mm	0.5 mm	2.5 mm	3 mm	5.5 mm	4 mm	1.3 mm	0.5 g
FBS01G2Z03005	M3	5 mm	0.5 mm	2.5 mm	3 mm	5.5 mm	5 mm	1.3 mm	0.56 g
FBS01G2Z03006	M3	6 mm	0.5 mm	2.5 mm	3 mm	5.5 mm	6 mm	1.3 mm	0.62 g
FBS01G2Z03008	M3	8 mm	0.5 mm	2.5 mm	3 mm	5.5 mm	8 mm	1.3 mm	0.74 g
FBS01G2Z03010	M3	10 mm	0.5 mm	2.5 mm	3 mm	5.5 mm	10 mm	1.3 mm	0.86 g
FBS01G2Z03012	M3	12 mm	0.5 mm	2.5 mm	3 mm	5.5 mm	12 mm	1.3 mm	0.98 g
FBS01G2Z03014	M3	14 mm	0.5 mm	2.5 mm	3 mm	5.5 mm	14 mm	1.3 mm	1.1 g
FBS01G2Z03016	M3	16 mm	0.5 mm	2.5 mm	3 mm	5.5 mm	16 mm	1.3 mm	1.2 g
FBS01G2Z03018	M3	18 mm	0.5 mm	2.5 mm	3 mm	5.5 mm	18 mm	1.3 mm	1.3 g
FBS01G2Z03020	M3	20 mm	0.5 mm	2.5 mm	3 mm	5.5 mm	18 mm	1.3 mm	1.4 g
FBS01G2Z03022	M3	22 mm	0.5 mm	2.5 mm	3 mm	5.5 mm	18 mm	1.3 mm	1.48 g
FBS01G2Z03025	M3	25 mm	0.5 mm	2.5 mm	3 mm	5.5 mm	18 mm	1.3 mm	1.6 g
FBS01G2Z03030	M3	30 mm	0.5 mm	2.5 mm	3 mm	5.5 mm	18 mm	1.3 mm	1.9 g
FBS01G2Z03035	M3	35 mm	0.5 mm	2.5 mm	3 mm	5.5 mm	18 mm	1.3 mm	2.2 g
FBS01G2Z03040	M3	40 mm	0.5 mm	2.5 mm	3 mm	5.5 mm	18 mm	1.3 mm	2.5 g
FBS01G2Z03045	M3	45 mm	0.5 mm	2.5 mm	3 mm	5.5 mm	18 mm	1.3 mm	2.8 g
FBS01G2Z03050	M3	50 mm	0.5 mm	2.5 mm	3 mm	5.5 mm	18 mm	1.3 mm	3.1 g
FBS01G2Z03070	M3	70 mm	0.5 mm	2.5 mm	3 mm	5.5 mm	18 mm	1.3 mm	4.3 g
FBS01G2Z04006	M4	6 mm	0.7 mm	3 mm	4 mm	7 mm	6 mm	2 mm	1.5 g
FBS01G2Z04008	M4	8 mm	0.7 mm	3 mm	4 mm	7 mm	8 mm	2 mm	1.7 g
FBS01G2Z04010	M4	10 mm	0.7 mm	3 mm	4 mm	7 mm	10 mm	2 mm	1.8 g
FBS01G2Z04012	M4	12 mm	0.7 mm	3 mm	4 mm	7 mm	12 mm	2 mm	2 g
FBS01G2Z04014	M4	14 mm	0.7 mm	3 mm	4 mm	7 mm	14 mm	2 mm	2.15 g
FBS01G2Z04016	M4	16 mm	0.7 mm	3 mm	4 mm	7 mm	16 mm	2 mm	2.3 g
FBS01G2Z04018	M4	18 mm	0.7 mm	3 mm	4 mm	7 mm	18 mm	2 mm	2.5 g
FBS01G2Z04020	M4	20 mm	0.7 mm	3 mm	4 mm	7 mm	20 mm	2 mm	2.7 g
FBS01G2Z04025	M4	25 mm	0.7 mm	3 mm	4 mm	7 mm	20 mm	2 mm	3.2 g



Part number	Size (d)	Length (l)	Thread pitch	Hex key size (s)	Head height (k)	Head diameter (dk)	Thread length (b)	Socket depth (t)	Weight
FBS01G2Z04030	M4	30 mm	0.7 mm	3 mm	4 mm	7 mm	20 mm	2 mm	3.7 g
FBS01G2Z04035	M4	35 mm	0.7 mm	3 mm	4 mm	7 mm	20 mm	2 mm	4.2 g
FBS01G2Z04040	M4	40 mm	0.7 mm	3 mm	4 mm	7 mm	20 mm	2 mm	4.7 g
FBS01G2Z04045	M4	45 mm	0.7 mm	3 mm	4 mm	7 mm	20 mm	2 mm	5.2 g
FBS01G2Z04055	M4	55 mm	0.7 mm	3 mm	4 mm	7 mm	20 mm	2 mm	6.2 g
FBS01G2Z04070	M4	70 mm	0.7 mm	3 mm	4 mm	7 mm	20 mm	2 mm	7.7 g
FBS01G2Z05006	M5	6 mm	0.8 mm	4 mm	5 mm	8.5 mm	6 mm	2.5 mm	2.3 g
FBS01G2Z05008	M5	8 mm	0.8 mm	4 mm	5 mm	8.5 mm	8 mm	2.5 mm	2.5 g
FBS01G2Z05010	M5	10 mm	0.8 mm	4 mm	5 mm	8.5 mm	10 mm	2.5 mm	2.7 g
FBS01G2Z05012	M5	12 mm	0.8 mm	4 mm	5 mm	8.5 mm	12 mm	2.5 mm	3 g
FBS01G2Z05014	M5	14 mm	0.8 mm	4 mm	5 mm	8.5 mm	14 mm	2.5 mm	3.25 g
FBS01G2Z05016	M5	16 mm	0.8 mm	4 mm	5 mm	8.5 mm	16 mm	2.5 mm	3.5 g
FBS01G2Z05020	M5	20 mm	0.8 mm	4 mm	5 mm	8.5 mm	20 mm	2.5 mm	4 g
FBS01G2Z05022	M5	22 mm	0.8 mm	4 mm	5 mm	8.5 mm	22 mm	2.5 mm	4.32 g
FBS01G2Z05025	M5	25 mm	0.8 mm	4 mm	5 mm	8.5 mm	22 mm	2.5 mm	4.8 g
FBS01G2Z05030	M5	30 mm	0.8 mm	4 mm	5 mm	8.5 mm	22 mm	2.5 mm	5.6 g
FBS01G2Z05035	M5	35 mm	0.8 mm	4 mm	5 mm	8.5 mm	22 mm	2.5 mm	6.3 g
FBS01G2Z05040	M5	40 mm	0.8 mm	4 mm	5 mm	8.5 mm	22 mm	2.5 mm	7.1 g
FBS01G2Z05045	M5	45 mm	0.8 mm	4 mm	5 mm	8.5 mm	22 mm	2.5 mm	7.9 g
FBS01G2Z05050	M5	50 mm	0.8 mm	4 mm	5 mm	8.5 mm	22 mm	2.5 mm	8.6 g
FBS01G2Z05065	M5	65 mm	0.8 mm	4 mm	5 mm	8.5 mm	22 mm	2.5 mm	10.7 g
FBS01G2Z05100	M5	100 mm	0.8 mm	4 mm	5 mm	8.5 mm	22 mm	2.5 mm	15.6 g
FBS01G2Z05120	M5	120 mm	0.8 mm	4 mm	5 mm	8.5 mm	22 mm	2.5 mm	18.4 g
FBS01G2Z05130	M5	130 mm	0.8 mm	4 mm	5 mm	8.5 mm	22 mm	2.5 mm	19.8 g
FBS01G2Z05170	M5	170 mm	0.8 mm	4 mm	5 mm	8.5 mm	22 mm	2.5 mm	25.4 g
FBS01G2Z05175	M5	175 mm	0.8 mm	4 mm	5 mm	8.5 mm	22 mm	2.5 mm	26.1 g
FBS01G2Z05180	M5	180 mm	0.8 mm	4 mm	5 mm	8.5 mm	22 mm	2.5 mm	26.8 g
FBS01G2Z05190	M5	190 mm	0.8 mm	4 mm	5 mm	8.5 mm	22 mm	2.5 mm	28.2 g
FBS01G2Z06010	M6	10 mm	1 mm	5 mm	6 mm	10 mm	10 mm	3 mm	4.7 g
FBS01G2Z06012	M6	12 mm	1 mm	5 mm	6 mm	10 mm	12 mm	3 mm	5.1 g
FBS01G2Z06014	M6	14 mm	1 mm	5 mm	6 mm	10 mm	14 mm	3 mm	5.45 g
FBS01G2Z06016	M6	16 mm	1 mm	5 mm	6 mm	10 mm	16 mm	3 mm	5.8 g
FBS01G2Z06018	M6	18 mm	1 mm	5 mm	6 mm	10 mm	18 mm	3 mm	6.15 g
FBS01G2Z06020	M6	20 mm	1 mm	5 mm	6 mm	10 mm	20 mm	3 mm	6.5 g
FBS01G2Z06022	M6	22 mm	1 mm	5 mm	6 mm	10 mm	22 mm	3 mm	6.94 g
FBS01G2Z06025	M6	25 mm	1 mm	5 mm	6 mm	10 mm	24 mm	3 mm	7.6 g
FBS01G2Z06028	M6	28 mm	1 mm	5 mm	6 mm	10 mm	24 mm	3 mm	8.02 g



Part number	Size (d)	Length (l)	Thread pitch	Hex key size (s)	Head height (k)	Head diameter (dk)	Thread length (b)	Socket depth (t)	Weight
FBS01G2Z06030	M6	30 mm	1 mm	5 mm	6 mm	10 mm	24 mm	3 mm	8.3 g
FBS01G2Z06035	M6	35 mm	1 mm	5 mm	6 mm	10 mm	24 mm	3 mm	9.9 g
FBS01G2Z06040	M6	40 mm	1 mm	5 mm	6 mm	10 mm	24 mm	3 mm	11 g
FBS01G2Z06045	M6	45 mm	1 mm	5 mm	6 mm	10 mm	24 mm	3 mm	12.1 g
FBS01G2Z06050	M6	50 mm	1 mm	5 mm	6 mm	10 mm	24 mm	3 mm	13.2 g
FBS01G2Z06055	M6	55 mm	1 mm	5 mm	6 mm	10 mm	24 mm	3 mm	14.3 g
FBS01G2Z06060	M6	60 mm	1 mm	5 mm	6 mm	10 mm	24 mm	3 mm	15.4 g
FBS01G2Z06065	M6	65 mm	1 mm	5 mm	6 mm	10 mm	24 mm	3 mm	16.5 g
FBS01G2Z06070	M6	70 mm	1 mm	5 mm	6 mm	10 mm	24 mm	3 mm	17.6 g
FBS01G2Z06100	M6	100 mm	1 mm	5 mm	6 mm	10 mm	24 mm	3 mm	24.2 g
FBS01G2Z06120	M6	120 mm	1 mm	5 mm	6 mm	10 mm	24 mm	3 mm	28.6 g
FBS01G2Z06150	M6	150 mm	1 mm	5 mm	6 mm	10 mm	24 mm	3 mm	35.2 g
FBS01G2Z08010	M8	10 mm	1.25 mm	6 mm	8 mm	13 mm	10 mm	4 mm	10.3 g
FBS01G2Z08012	M8	12 mm	1.25 mm	6 mm	8 mm	13 mm	12 mm	4 mm	10.9 g
FBS01G2Z08014	M8	14 mm	1.25 mm	6 mm	8 mm	13 mm	14 mm	4 mm	11.5 g
FBS01G2Z08016	M8	16 mm	1.25 mm	6 mm	8 mm	13 mm	16 mm	4 mm	12.1 g
FBS01G2Z08020	M8	20 mm	1.25 mm	6 mm	8 mm	13 mm	20 mm	4 mm	13.4 g
FBS01G2Z08025	M8	25 mm	1.25 mm	6 mm	8 mm	13 mm	25 mm	4 mm	15 g
FBS01G2Z08030	M8	30 mm	1.25 mm	6 mm	8 mm	13 mm	28 mm	4 mm	16.9 g
FBS01G2Z08035	M8	35 mm	1.25 mm	6 mm	8 mm	13 mm	28 mm	4 mm	18.9 g
FBS01G2Z08040	M8	40 mm	1.25 mm	6 mm	8 mm	13 mm	28 mm	4 mm	20.9 g
FBS01G2Z08045	M8	45 mm	1.25 mm	6 mm	8 mm	13 mm	28 mm	4 mm	22.9 g
FBS01G2Z08050	M8	50 mm	1.25 mm	6 mm	8 mm	13 mm	28 mm	4 mm	24.9 g
FBS01G2Z08055	M8	55 mm	1.25 mm	6 mm	8 mm	13 mm	28 mm	4 mm	26.9 g
FBS01G2Z08060	M8	60 mm	1.25 mm	6 mm	8 mm	13 mm	28 mm	4 mm	28.9 g
FBS01G2Z08065	M8	65 mm	1.25 mm	6 mm	8 mm	13 mm	28 mm	4 mm	31 g
FBS01G2Z08070	M8	70 mm	1.25 mm	6 mm	8 mm	13 mm	28 mm	4 mm	33 g
FBS01G2Z08075	M8	75 mm	1.25 mm	6 mm	8 mm	13 mm	28 mm	4 mm	35 g
FBS01G2Z08080	M8	80 mm	1.25 mm	6 mm	8 mm	13 mm	28 mm	4 mm	37 g
FBS01G2Z08090	M8	90 mm	1.25 mm	6 mm	8 mm	13 mm	28 mm	4 mm	41 g
FBS01G2Z08100	M8	100 mm	1.25 mm	6 mm	8 mm	13 mm	28 mm	4 mm	45 g
FBS01G2Z10012	M10	12 mm	1.5 mm	8 mm	10 mm	16 mm	12 mm	5 mm	18.9 g
FBS01G2Z10016	M10	16 mm	1.5 mm	8 mm	10 mm	16 mm	16 mm	5 mm	20.9 g
FBS01G2Z10020	M10	20 mm	1.5 mm	8 mm	10 mm	16 mm	20 mm	5 mm	22.9 g
FBS01G2Z10022	M10	22 mm	1.5 mm	8 mm	10 mm	16 mm	22 mm	5 mm	23.9 g
FBS01G2Z10025	M10	25 mm	1.5 mm	8 mm	10 mm	16 mm	25 mm	5 mm	25.4 g
FBS01G2Z10030	M10	30 mm	1.5 mm	8 mm	10 mm	16 mm	30 mm	5 mm	27.9 g



Part number	Size (d)	Length (l)	Thread pitch	Hex key size (s)	Head height (k)	Head diameter (dk)	Thread length (b)	Socket depth (t)	Weight
FBS01G2Z10035	M10	35 mm	1.5 mm	8 mm	10 mm	16 mm	32 mm	5 mm	30.4 g
FBS01G2Z10040	M10	40 mm	1.5 mm	8 mm	10 mm	16 mm	32 mm	5 mm	32.9 g
FBS01G2Z10045	M10	45 mm	1.5 mm	8 mm	10 mm	16 mm	32 mm	5 mm	36.1 g
FBS01G2Z10050	M10	50 mm	1.5 mm	8 mm	10 mm	16 mm	32 mm	5 mm	39.3 g
FBS01G2Z10055	M10	55 mm	1.5 mm	8 mm	10 mm	16 mm	32 mm	5 mm	42.5 g
FBS01G2Z10060	M10	60 mm	1.5 mm	8 mm	10 mm	16 mm	32 mm	5 mm	45.7 g
FBS01G2Z10065	M10	65 mm	1.5 mm	8 mm	10 mm	16 mm	32 mm	5 mm	48.9 g
FBS01G2Z10070	M10	70 mm	1.5 mm	8 mm	10 mm	16 mm	32 mm	5 mm	52.1 g
FBS01G2Z10075	M10	75 mm	1.5 mm	8 mm	10 mm	16 mm	32 mm	5 mm	55.3 g
FBS01G2Z10100	M10	100 mm	1.5 mm	8 mm	10 mm	16 mm	32 mm	5 mm	71.2 g
FBS01G2Z10120	M10	120 mm	1.5 mm	8 mm	10 mm	16 mm	32 mm	5 mm	83.8 g
FBS01G2Z12025	M12	25 mm	1.75 mm	10 mm	12 mm	18 mm	25 mm	6 mm	35.7 g
FBS01G2Z12030	M12	30 mm	1.75 mm	10 mm	12 mm	18 mm	30 mm	6 mm	39.3 g
FBS01G2Z12035	M12	35 mm	1.75 mm	10 mm	12 mm	18 mm	35 mm	6 mm	42.9 g
FBS01G2Z12040	M12	40 mm	1.75 mm	10 mm	12 mm	18 mm	36 mm	6 mm	46.5 g
FBS01G2Z12045	M12	45 mm	1.75 mm	10 mm	12 mm	18 mm	36 mm	6 mm	50.1 g
FBS01G2Z12050	M12	50 mm	1.75 mm	10 mm	12 mm	18 mm	36 mm	6 mm	54.5 g
FBS01G2Z12055	M12	55 mm	1.75 mm	10 mm	12 mm	18 mm	36 mm	6 mm	58.9 g
FBS01G2Z12060	M12	60 mm	1.75 mm	10 mm	12 mm	18 mm	36 mm	6 mm	63.4 g
FBS01G2Z12065	M12	65 mm	1.75 mm	10 mm	12 mm	18 mm	36 mm	6 mm	67.8 g
FBS01G2Z12070	M12	70 mm	1.75 mm	10 mm	12 mm	18 mm	36 mm	6 mm	71.3 g
FBS01G2Z12075	M12	75 mm	1.75 mm	10 mm	12 mm	18 mm	36 mm	6 mm	75.75 g
FBS01G2Z12080	M12	80 mm	1.75 mm	10 mm	12 mm	18 mm	36 mm	6 mm	80.2 g
FBS01G2Z12090	M12	90 mm	1.75 mm	10 mm	12 mm	18 mm	36 mm	6 mm	89.1 g
FBS01G2Z12100	M12	100 mm	1.75 mm	10 mm	12 mm	18 mm	36 mm	6 mm	98 g
FBS01G2Z12110	M12	110 mm	1.75 mm	10 mm	12 mm	18 mm	36 mm	6 mm	107 g
FBS01G2Z12120	M12	120 mm	1.75 mm	10 mm	12 mm	18 mm	36 mm	6 mm	116 g
FBS01G2Z12130	M12	130 mm	1.75 mm	10 mm	12 mm	18 mm	36 mm	6 mm	125 g
FBS01G2Z12150	M12	150 mm	1.75 mm	10 mm	12 mm	18 mm	36 mm	6 mm	143 g
FBS01G2Z12200	M12	200 mm	1.75 mm	10 mm	12 mm	18 mm	36 mm	6 mm	188 g
FBS05G2ZL8025	M12x1.5	25 mm	1.5 mm	10 mm	12 mm	18 mm	25 mm	6 mm	35.7 g
FBS01G2Z14050	M14	50 mm	2 mm	12 mm	14 mm	21 mm	40 mm	7 mm	73 g
FBS01G2Z14080	M14	80 mm	2 mm	12 mm	14 mm	21 mm	40 mm	7 mm	108 g
FBS01G2Z14100	M14	100 mm	2 mm	12 mm	14 mm	21 mm	40 mm	7 mm	132 g
FBS01G2Z16030	M16	30 mm	2 mm	14 mm	16 mm	24 mm	30 mm	8 mm	77.8 g
FBS01G2Z16040	M16	40 mm	2 mm	14 mm	16 mm	24 mm	40 mm	8 mm	91 g
FBS01G2Z16045	M16	45 mm	2 mm	14 mm	16 mm	24 mm	44 mm	8 mm	97.6 g



Part number	Size (d)	Length (l)	Thread pitch	Hex key size (s)	Head height (k)	Head diameter (dk)	Thread length (b)	Socket depth (t)	Weight
FBS01G2Z16050	M16	50 mm	2 mm	14 mm	16 mm	24 mm	44 mm	8 mm	106 g
FBS01G2Z16060	M16	60 mm	2 mm	14 mm	16 mm	24 mm	44 mm	8 mm	122 g
FBS01G2Z16070	M16	70 mm	2 mm	14 mm	16 mm	24 mm	44 mm	8 mm	138 g
FBS01G2Z16080	M16	80 mm	2 mm	14 mm	16 mm	24 mm	44 mm	8 mm	154 g
FBS01G2Z16110	M16	110 mm	2 mm	14 mm	16 mm	24 mm	44 mm	8 mm	202 g
FBS01G2Z16160	M16	160 mm	2 mm	14 mm	16 mm	24 mm	44 mm	8 mm	282 g
FBS05G2ZN0050	M16x1.5	50 mm	1.5 mm	14 mm	16 mm	24 mm	44 mm	8 mm	106 g
FBS09G2Z18050	M18	50 mm	2.5 mm	14 mm	18 mm	27 mm	48 mm	9 mm	147 g
FBS01G2Z20045	M20	45 mm	2.5 mm	17 mm	20 mm	30 mm	45 mm	10 mm	161 g
FBS01G2Z20050	M20	50 mm	2.5 mm	17 mm	20 mm	30 mm	50 mm	10 mm	172 g
FBS01G2Z20060	M20	60 mm	2.5 mm	17 mm	20 mm	30 mm	52 mm	10 mm	194 g
FBS01G2Z20070	M20	70 mm	2.5 mm	17 mm	20 mm	30 mm	52 mm	10 mm	216 g
FBS01G2Z20080	M20	80 mm	2.5 mm	17 mm	20 mm	30 mm	52 mm	10 mm	241 g
FBS01G2Z20090	M20	90 mm	2.5 mm	17 mm	20 mm	30 mm	52 mm	10 mm	266 g
FBS01G2Z20100	M20	100 mm	2.5 mm	17 mm	20 mm	30 mm	52 mm	10 mm	291 g
FBS01G2Z20120	M20	120 mm	2.5 mm	17 mm	20 mm	30 mm	52 mm	10 mm	341 g
FBS05G2ZN3040	M20x1.5	40 mm	1.5 mm	17 mm	20 mm	30 mm	40 mm	10 mm	150 g
FBS05G2ZN3085	M20x1.5	85 mm	1.5 mm	17 mm	20 mm	30 mm	52 mm	10 mm	253.5 g
FBS09G2ZN4035	M20x2	35 mm	2 mm	17 mm	20 mm	30 mm	35 mm	10 mm	139 g
FBS09G2ZN5090	M22x1.5	90 mm	1.5 mm	17 mm	22 mm	33 mm	56 mm	11 mm	366 g
FBS01G2Z24050	M24	50 mm	3 mm	19 mm	24 mm	36 mm	50 mm	12 mm	300 g
FBS01G2Z24055	M24	55 mm	3 mm	19 mm	24 mm	36 mm	55 mm	12 mm	316 g
FBS01G2Z24060	M24	60 mm	3 mm	19 mm	24 mm	36 mm	60 mm	12 mm	330 g
FBS01G2Z24070	M24	70 mm	3 mm	19 mm	24 mm	36 mm	60 mm	12 mm	363 g
FBS01G2Z24080	M24	80 mm	3 mm	19 mm	24 mm	36 mm	60 mm	12 mm	399 g
FBS01G2Z24090	M24	90 mm	3 mm	19 mm	24 mm	36 mm	60 mm	12 mm	435 g
FBS01G2Z24100	M24	100 mm	3 mm	19 mm	24 mm	36 mm	60 mm	12 mm	471 g
FBS01G2Z24220	M24	220 mm	3 mm	19 mm	24 mm	36 mm	60 mm	12 mm	903 g
FBS01G2Z30070	M30	70 mm	3.5 mm	22 mm	30 mm	45 mm	70 mm	15.5 mm	635 g
FBS01G2Z30120	M30	120 mm	3.5 mm	22 mm	30 mm	45 mm	72 mm	15.5 mm	910 g
FBS01G2Z30260	M30	260 mm	3.5 mm	22 mm	30 mm	45 mm	72 mm	15.5 mm	1680 g

Part numbers: 186

STANDARDS & CERTIFICATES

Standards

DIN 912 – Hex Socket Head Cap Screw

ISO 4762 – Hex Socket Head Cap Screw

ISO 12474 – Hex Socket Head Cap Screw Fine Thread

