


Hex Socket Countersunk Head Screw DIN 7991 / ISO 10642 - Stainless steel A4-70, Plain

Hex Socket Countersunk Head Screw to DIN 7991 / ISO 10642, in the sizes, grades and finishes listed.

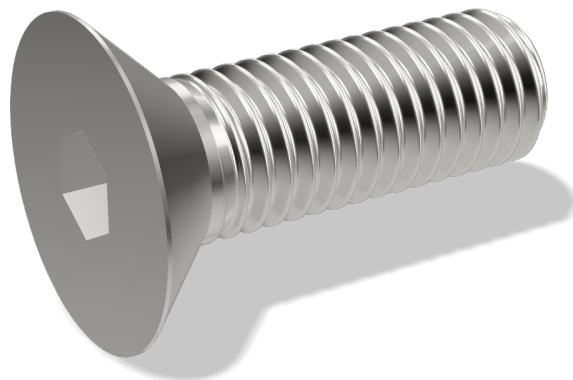

TECHNICAL DATA

Dimensions


Thread form	Metric ISO thread
-------------	-------------------

Materials & Finish

Head type	Countersunk
Drive type	Hexagon socket

Property class / grade	A4-70
Material	Stainless steel
Surface finish	Plain

DIMENSIONS

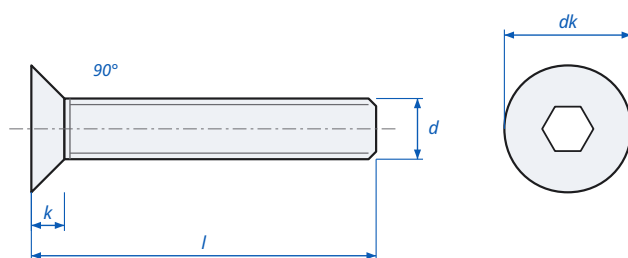

d	Thread diameter
l	Length
k	Head height
dk	Head diameter

Hex Socket Countersunk Head Screw DIN 7991 / ISO 10642 - dimensions

AVAILABLE PART NUMBERS

Part number	Size (d)	Length (l)	Thread pitch	Hex key size	Head height (k)	Head diameter (dk)	Weight
FBK02S4P02003	M2	3 mm	0.4 mm	–	–	–	–
FBK02S4P02004	M2	4 mm	0.4 mm	–	–	–	–
FBK02S4P02005	M2	5 mm	0.4 mm	–	–	–	–
FBK02S4P02006	M2	6 mm	0.4 mm	–	–	–	–
FBK02S4P02008	M2	8 mm	0.4 mm	–	–	–	–
FBK02S4P02010	M2	10 mm	0.4 mm	–	–	–	–



Part number	Size (d)	Length (l)	Thread pitch	Hex key size	Head height (k)	Head diameter (dk)	Weight
FBK02S4P02012	M2	12 mm	0.4 mm	–	–	–	–
FBK02S4P02016	M2	16 mm	0.4 mm	–	–	–	–
FBK02S4P02020	M2	20 mm	0.4 mm	–	–	–	–
FBK02S4PC5005	M2.5	5 mm	0.45 mm	–	–	–	–
FBK02S4PC5006	M2.5	6 mm	0.45 mm	–	–	–	–
FBK02S4PC5008	M2.5	8 mm	0.45 mm	–	–	–	–
FBK02S4PC5010	M2.5	10 mm	0.45 mm	–	–	–	–
FBK02S4PC5012	M2.5	12 mm	0.45 mm	–	–	–	–
FBK02S4PC5016	M2.5	16 mm	0.45 mm	–	–	–	–
FBK02S4P03006	M3	6 mm	0.5 mm	2 mm	1.7 mm	6 mm	0.3838 g
FBK01S4P03006	M3	6 mm	0.5 mm	2 mm	1.86 mm	6.72 mm	0.3838 g
FBK02S4P03008	M3	8 mm	0.5 mm	2 mm	1.7 mm	6 mm	0.4747 g
FBK01S4P03008	M3	8 mm	0.5 mm	2 mm	1.86 mm	6.72 mm	0.4747 g
FBK02S4P03010	M3	10 mm	0.5 mm	2 mm	1.7 mm	6 mm	0.5656 g
FBK01S4P03010	M3	10 mm	0.5 mm	2 mm	1.86 mm	6.72 mm	0.5656 g
FBK02S4P03012	M3	12 mm	0.5 mm	2 mm	1.7 mm	6 mm	0.6565 g
FBK01S4P03012	M3	12 mm	0.5 mm	2 mm	1.86 mm	6.72 mm	0.6565 g
FBK01S4P03014	M3	14 mm	0.5 mm	2 mm	1.86 mm	6.72 mm	0.7474 g
FBK02S4P03016	M3	16 mm	0.5 mm	2 mm	1.7 mm	6 mm	0.8383 g
FBK01S4P03016	M3	16 mm	0.5 mm	2 mm	1.86 mm	6.72 mm	0.8383 g
FBK02S4P03018	M3	18 mm	0.5 mm	2 mm	1.7 mm	6 mm	0.9242 g
FBK01S4P03018	M3	18 mm	0.5 mm	2 mm	1.86 mm	6.72 mm	0.9242 g
FBK02S4P03020	M3	20 mm	0.5 mm	2 mm	1.7 mm	6 mm	1.01 g
FBK01S4P03020	M3	20 mm	0.5 mm	2 mm	1.86 mm	6.72 mm	1.01 g
FBK02S4P03025	M3	25 mm	0.5 mm	2 mm	1.7 mm	6 mm	1.364 g
FBK01S4P03025	M3	25 mm	0.5 mm	2 mm	1.86 mm	6.72 mm	1.364 g
FBK02S4P03030	M3	30 mm	0.5 mm	2 mm	1.7 mm	6 mm	1.646 g
FBK01S4P03030	M3	30 mm	0.5 mm	2 mm	1.86 mm	6.72 mm	1.646 g
FBK02S4P04006	M4	6 mm	0.7 mm	2.5 mm	2.3 mm	8 mm	0.7777 g
FBK01S4P04006	M4	6 mm	0.7 mm	2.5 mm	2.48 mm	8.96 mm	0.7777 g
FBK02S4P04008	M4	8 mm	0.7 mm	2.5 mm	2.3 mm	8 mm	0.9292 g
FBK01S4P04008	M4	8 mm	0.7 mm	2.5 mm	2.48 mm	8.96 mm	0.9292 g
FBK02S4P04010	M4	10 mm	0.7 mm	2.5 mm	2.3 mm	8 mm	1.081 g
FBK01S4P04010	M4	10 mm	0.7 mm	2.5 mm	2.48 mm	8.96 mm	1.081 g
FBK02S4P04012	M4	12 mm	0.7 mm	2.5 mm	2.3 mm	8 mm	1.242 g
FBK01S4P04012	M4	12 mm	0.7 mm	2.5 mm	2.48 mm	8.96 mm	1.242 g
FBK02S4P04014	M4	14 mm	0.7 mm	2.5 mm	2.3 mm	8 mm	1.394 g



Part number	Size (d)	Length (l)	Thread pitch	Hex key size	Head height (k)	Head diameter (dk)	Weight
FBK01S4P04014	M4	14 mm	0.7 mm	2.5 mm	2.48 mm	8.96 mm	1.394 g
FBK02S4P04016	M4	16 mm	0.7 mm	2.5 mm	2.3 mm	8 mm	1.545 g
FBK01S4P04016	M4	16 mm	0.7 mm	2.5 mm	2.48 mm	8.96 mm	1.545 g
FBK02S4P04018	M4	18 mm	0.7 mm	2.5 mm	2.3 mm	8 mm	1.702 g
FBK01S4P04018	M4	18 mm	0.7 mm	2.5 mm	2.48 mm	8.96 mm	1.702 g
FBK02S4P04020	M4	20 mm	0.7 mm	2.5 mm	2.3 mm	8 mm	1.858 g
FBK01S4P04020	M4	20 mm	0.7 mm	2.5 mm	2.48 mm	8.96 mm	1.858 g
FBK02S4P04025	M4	25 mm	0.7 mm	2.5 mm	2.3 mm	8 mm	2.252 g
FBK01S4P04025	M4	25 mm	0.7 mm	2.5 mm	2.48 mm	8.96 mm	2.252 g
FBK02S4P04028	M4	28 mm	0.7 mm	2.5 mm	2.3 mm	8 mm	2.658 g
FBK02S4P04030	M4	30 mm	0.7 mm	2.5 mm	2.3 mm	8 mm	2.929 g
FBK01S4P04030	M4	30 mm	0.7 mm	2.5 mm	2.48 mm	8.96 mm	2.929 g
FBK02S4P04035	M4	35 mm	0.7 mm	2.5 mm	2.3 mm	8 mm	3.434 g
FBK01S4P04035	M4	35 mm	0.7 mm	2.5 mm	2.48 mm	8.96 mm	3.434 g
FBK02S4P04040	M4	40 mm	0.7 mm	2.5 mm	2.3 mm	8 mm	3.939 g
FBK01S4P04040	M4	40 mm	0.7 mm	2.5 mm	2.48 mm	8.96 mm	3.939 g
FBK01S4P04045	M4	45 mm	0.7 mm	2.5 mm	2.48 mm	8.96 mm	4.444 g
FBK02S4P04050	M4	50 mm	0.7 mm	2.5 mm	2.3 mm	8 mm	4.949 g
FBK01S4P04050	M4	50 mm	0.7 mm	2.5 mm	2.48 mm	8.96 mm	4.949 g
FBK01S4P05006	M5	6 mm	0.8 mm	3 mm	3.1 mm	11.2 mm	1.364 g
FBK02S4P05008	M5	8 mm	0.8 mm	3 mm	2.8 mm	10 mm	1.616 g
FBK01S4P05008	M5	8 mm	0.8 mm	3 mm	3.1 mm	11.2 mm	1.616 g
FBK02S4P05010	M5	10 mm	0.8 mm	3 mm	2.8 mm	10 mm	1.869 g
FBK01S4P05010	M5	10 mm	0.8 mm	3 mm	3.1 mm	11.2 mm	1.869 g
FBK02S4P05012	M5	12 mm	0.8 mm	3 mm	2.8 mm	10 mm	2.121 g
FBK01S4P05012	M5	12 mm	0.8 mm	3 mm	3.1 mm	11.2 mm	2.121 g
FBK02S4P05014	M5	14 mm	0.8 mm	3 mm	2.8 mm	10 mm	2.368 g
FBK01S4P05014	M5	14 mm	0.8 mm	3 mm	3.1 mm	11.2 mm	2.368 g
FBK02S4P05016	M5	16 mm	0.8 mm	3 mm	2.8 mm	10 mm	2.616 g
FBK01S4P05016	M5	16 mm	0.8 mm	3 mm	3.1 mm	11.2 mm	2.616 g
FBK02S4P05018	M5	18 mm	0.8 mm	3 mm	2.8 mm	10 mm	2.868 g
FBK01S4P05018	M5	18 mm	0.8 mm	3 mm	3.1 mm	11.2 mm	2.868 g
FBK02S4P05020	M5	20 mm	0.8 mm	3 mm	2.8 mm	10 mm	3.121 g
FBK01S4P05020	M5	20 mm	0.8 mm	3 mm	3.1 mm	11.2 mm	3.121 g
FBK02S4P05025	M5	25 mm	0.8 mm	3 mm	2.8 mm	10 mm	3.747 g
FBK01S4P05025	M5	25 mm	0.8 mm	3 mm	3.1 mm	11.2 mm	3.747 g
FBK02S4P05030	M5	30 mm	0.8 mm	3 mm	2.8 mm	10 mm	4.373 g



Part number	Size (d)	Length (l)	Thread pitch	Hex key size	Head height (k)	Head diameter (dk)	Weight
FBK01S4P05030	M5	30 mm	0.8 mm	3 mm	3.1 mm	11.2 mm	4.373 g
FBK02S4P05035	M5	35 mm	0.8 mm	3 mm	2.8 mm	10 mm	5.484 g
FBK01S4P05035	M5	35 mm	0.8 mm	3 mm	3.1 mm	11.2 mm	5.484 g
FBK02S4P05040	M5	40 mm	0.8 mm	3 mm	2.8 mm	10 mm	6.262 g
FBK01S4P05040	M5	40 mm	0.8 mm	3 mm	3.1 mm	11.2 mm	6.262 g
FBK02S4P05045	M5	45 mm	0.8 mm	3 mm	2.8 mm	10 mm	7.04 g
FBK01S4P05045	M5	45 mm	0.8 mm	3 mm	3.1 mm	11.2 mm	7.04 g
FBK02S4P05050	M5	50 mm	0.8 mm	3 mm	2.8 mm	10 mm	7.817 g
FBK01S4P05050	M5	50 mm	0.8 mm	3 mm	3.1 mm	11.2 mm	7.817 g
FBK01S4P05055	M5	55 mm	0.8 mm	3 mm	3.1 mm	11.2 mm	8.595 g
FBK01S4P05060	M5	60 mm	0.8 mm	3 mm	3.1 mm	11.2 mm	9.373 g
FBK02S4P06008	M6	8 mm	1 mm	4 mm	3.3 mm	12 mm	2.373 g
FBK01S4P06008	M6	8 mm	1 mm	4 mm	3.72 mm	13.44 mm	2.373 g
FBK02S4P06010	M6	10 mm	1 mm	4 mm	3.3 mm	12 mm	2.727 g
FBK01S4P06010	M6	10 mm	1 mm	4 mm	3.72 mm	13.44 mm	2.727 g
FBK02S4P06012	M6	12 mm	1 mm	4 mm	3.3 mm	12 mm	3.08 g
FBK01S4P06012	M6	12 mm	1 mm	4 mm	3.72 mm	13.44 mm	3.08 g
FBK02S4P06014	M6	14 mm	1 mm	4 mm	3.3 mm	12 mm	3.439 g
FBK01S4P06014	M6	14 mm	1 mm	4 mm	3.72 mm	13.44 mm	3.439 g
FBK02S4P06016	M6	16 mm	1 mm	4 mm	3.3 mm	12 mm	3.798 g
FBK01S4P06016	M6	16 mm	1 mm	4 mm	3.72 mm	13.44 mm	3.798 g
FBK02S4P06018	M6	18 mm	1 mm	4 mm	3.3 mm	12 mm	4.151 g
FBK01S4P06018	M6	18 mm	1 mm	4 mm	3.72 mm	13.44 mm	4.151 g
FBK02S4P06020	M6	20 mm	1 mm	4 mm	3.3 mm	12 mm	4.505 g
FBK01S4P06020	M6	20 mm	1 mm	4 mm	3.72 mm	13.44 mm	4.505 g
FBK02S4P06025	M6	25 mm	1 mm	4 mm	3.3 mm	12 mm	5.393 g
FBK01S4P06025	M6	25 mm	1 mm	4 mm	3.72 mm	13.44 mm	5.393 g
FBK02S4P06030	M6	30 mm	1 mm	4 mm	3.3 mm	12 mm	6.282 g
FBK01S4P06030	M6	30 mm	1 mm	4 mm	3.72 mm	13.44 mm	6.282 g
FBK02S4P06035	M6	35 mm	1 mm	4 mm	3.3 mm	12 mm	7.171 g
FBK01S4P06035	M6	35 mm	1 mm	4 mm	3.72 mm	13.44 mm	7.171 g
FBK02S4P06040	M6	40 mm	1 mm	4 mm	3.3 mm	12 mm	9.116 g
FBK01S4P06040	M6	40 mm	1 mm	4 mm	3.72 mm	13.44 mm	8.918 g
FBK02S4P06045	M6	45 mm	1 mm	4 mm	3.3 mm	12 mm	10.014 g
FBK01S4P06045	M6	45 mm	1 mm	4 mm	3.72 mm	13.44 mm	10.014 g
FBK02S4P06050	M6	50 mm	1 mm	4 mm	3.3 mm	12 mm	11.11 g
FBK01S4P06050	M6	50 mm	1 mm	4 mm	3.72 mm	13.44 mm	11.11 g



Part number	Size (d)	Length (l)	Thread pitch	Hex key size	Head height (k)	Head diameter (dk)	Weight
FBK02S4P06055	M6	55 mm	1 mm	4 mm	3.3 mm	12 mm	12.211 g
FBK01S4P06055	M6	55 mm	1 mm	4 mm	3.72 mm	13.44 mm	12.211 g
FBK02S4P06060	M6	60 mm	1 mm	4 mm	3.3 mm	12 mm	13.302 g
FBK01S4P06060	M6	60 mm	1 mm	4 mm	3.72 mm	13.44 mm	13.302 g
FBK02S4P06070	M6	70 mm	1 mm	4 mm	3.3 mm	12 mm	15.493 g
FBK01S4P06070	M6	70 mm	1 mm	4 mm	3.72 mm	13.44 mm	15.493 g
FBK02S4P06080	M6	80 mm	1 mm	4 mm	3.3 mm	12 mm	17.685 g
FBK01S4P06080	M6	80 mm	1 mm	4 mm	3.72 mm	13.44 mm	17.685 g
FBK01S4P06090	M6	90 mm	1 mm	4 mm	3.72 mm	13.44 mm	19.877 g
FBK01S4P06100	M6	100 mm	1 mm	4 mm	3.72 mm	13.44 mm	22.069 g
FBK02S4P08010	M8	10 mm	1.25 mm	5 mm	4.4 mm	16 mm	5.525 g
FBK01S4P08010	M8	10 mm	1.25 mm	5 mm	4.96 mm	17.92 mm	5.525 g
FBK02S4P08012	M8	12 mm	1.25 mm	5 mm	4.4 mm	16 mm	6.161 g
FBK01S4P08012	M8	12 mm	1.25 mm	5 mm	4.96 mm	17.92 mm	6.161 g
FBK01S4P08014	M8	14 mm	1.25 mm	5 mm	4.96 mm	17.92 mm	6.792 g
FBK02S4P08016	M8	16 mm	1.25 mm	5 mm	4.4 mm	16 mm	7.423 g
FBK01S4P08016	M8	16 mm	1.25 mm	5 mm	4.96 mm	17.92 mm	7.423 g
FBK02S4P08018	M8	18 mm	1.25 mm	5 mm	4.4 mm	16 mm	8.055 g
FBK01S4P08018	M8	18 mm	1.25 mm	5 mm	4.96 mm	17.92 mm	8.055 g
FBK02S4P08020	M8	20 mm	1.25 mm	5 mm	4.4 mm	16 mm	8.686 g
FBK01S4P08020	M8	20 mm	1.25 mm	5 mm	4.96 mm	17.92 mm	8.686 g
FBK02S4P08025	M8	25 mm	1.25 mm	5 mm	4.4 mm	16 mm	10.302 g
FBK01S4P08025	M8	25 mm	1.25 mm	5 mm	4.96 mm	17.92 mm	10.302 g
FBK02S4P08030	M8	30 mm	1.25 mm	5 mm	4.4 mm	16 mm	11.817 g
FBK01S4P08030	M8	30 mm	1.25 mm	5 mm	4.96 mm	17.92 mm	11.817 g
FBK02S4P08035	M8	35 mm	1.25 mm	5 mm	4.4 mm	16 mm	13.433 g
FBK01S4P08035	M8	35 mm	1.25 mm	5 mm	4.96 mm	17.92 mm	13.433 g
FBK02S4P08040	M8	40 mm	1.25 mm	5 mm	4.4 mm	16 mm	14.948 g
FBK01S4P08040	M8	40 mm	1.25 mm	5 mm	4.96 mm	17.92 mm	14.948 g
FBK02S4P08045	M8	45 mm	1.25 mm	5 mm	4.4 mm	16 mm	17.524 g
FBK01S4P08045	M8	45 mm	1.25 mm	5 mm	4.96 mm	17.92 mm	17.524 g
FBK02S4P08050	M8	50 mm	1.25 mm	5 mm	4.4 mm	16 mm	20.099 g
FBK01S4P08050	M8	50 mm	1.25 mm	5 mm	4.96 mm	17.92 mm	20.099 g
FBK02S4P08055	M8	55 mm	1.25 mm	5 mm	4.4 mm	16 mm	22.574 g
FBK01S4P08055	M8	55 mm	1.25 mm	5 mm	4.96 mm	17.92 mm	22.574 g
FBK02S4P08060	M8	60 mm	1.25 mm	5 mm	4.4 mm	16 mm	25.048 g
FBK01S4P08060	M8	60 mm	1.25 mm	5 mm	4.96 mm	17.92 mm	25.048 g



Part number	Size (d)	Length (l)	Thread pitch	Hex key size	Head height (k)	Head diameter (dk)	Weight
FBK02S4P08070	M8	70 mm	1.25 mm	5 mm	4.4 mm	16 mm	29.997 g
FBK01S4P08070	M8	70 mm	1.25 mm	5 mm	4.96 mm	17.92 mm	29.997 g
FBK02S4P08080	M8	80 mm	1.25 mm	5 mm	4.4 mm	16 mm	34.946 g
FBK01S4P08080	M8	80 mm	1.25 mm	5 mm	4.96 mm	17.92 mm	34.946 g
FBK02S4P08090	M8	90 mm	1.25 mm	5 mm	4.4 mm	16 mm	39.895 g
FBK01S4P08090	M8	90 mm	1.25 mm	5 mm	4.96 mm	17.92 mm	39.895 g
FBK02S4P08100	M8	100 mm	1.25 mm	5 mm	4.4 mm	16 mm	44.844 g
FBK01S4P08100	M8	100 mm	1.25 mm	5 mm	4.96 mm	17.92 mm	44.844 g
FBK01S4P08120	M8	120 mm	1.25 mm	5 mm	4.96 mm	17.92 mm	54.742 g
FBK02S4P10016	M10	16 mm	1.5 mm	6 mm	5.5 mm	20 mm	12.221 g
FBK01S4P10016	M10	16 mm	1.5 mm	6 mm	6.2 mm	22.4 mm	12.221 g
FBK02S4P10018	M10	18 mm	1.5 mm	6 mm	5.5 mm	20 mm	13.231 g
FBK02S4P10020	M10	20 mm	1.5 mm	6 mm	5.5 mm	20 mm	14.241 g
FBK01S4P10020	M10	20 mm	1.5 mm	6 mm	6.2 mm	22.4 mm	14.241 g
FBK02S4P10025	M10	25 mm	1.5 mm	6 mm	5.5 mm	20 mm	16.766 g
FBK01S4P10025	M10	25 mm	1.5 mm	6 mm	6.2 mm	22.4 mm	16.766 g
FBK02S4P10030	M10	30 mm	1.5 mm	6 mm	5.5 mm	20 mm	19.291 g
FBK01S4P10030	M10	30 mm	1.5 mm	6 mm	6.2 mm	22.4 mm	19.291 g
FBK02S4P10035	M10	35 mm	1.5 mm	6 mm	5.5 mm	20 mm	21.816 g
FBK01S4P10035	M10	35 mm	1.5 mm	6 mm	6.2 mm	22.4 mm	21.816 g
FBK02S4P10040	M10	40 mm	1.5 mm	6 mm	5.5 mm	20 mm	24.341 g
FBK01S4P10040	M10	40 mm	1.5 mm	6 mm	6.2 mm	22.4 mm	24.341 g
FBK02S4P10045	M10	45 mm	1.5 mm	6 mm	5.5 mm	20 mm	27.371 g
FBK01S4P10045	M10	45 mm	1.5 mm	6 mm	6.2 mm	22.4 mm	27.371 g
FBK02S4P10050	M10	50 mm	1.5 mm	6 mm	5.5 mm	20 mm	30.401 g
FBK01S4P10050	M10	50 mm	1.5 mm	6 mm	6.2 mm	22.4 mm	30.401 g
FBK02S4P10055	M10	55 mm	1.5 mm	6 mm	5.5 mm	20 mm	33.229 g
FBK01S4P10055	M10	55 mm	1.5 mm	6 mm	6.2 mm	22.4 mm	33.229 g
FBK02S4P10060	M10	60 mm	1.5 mm	6 mm	5.5 mm	20 mm	36.057 g
FBK01S4P10060	M10	60 mm	1.5 mm	6 mm	6.2 mm	22.4 mm	36.057 g
FBK02S4P10070	M10	70 mm	1.5 mm	6 mm	5.5 mm	20 mm	41.612 g
FBK01S4P10070	M10	70 mm	1.5 mm	6 mm	6.2 mm	22.4 mm	41.612 g
FBK02S4P10080	M10	80 mm	1.5 mm	6 mm	5.5 mm	20 mm	47.167 g
FBK01S4P10080	M10	80 mm	1.5 mm	6 mm	6.2 mm	22.4 mm	47.167 g
FBK02S4P10090	M10	90 mm	1.5 mm	6 mm	5.5 mm	20 mm	52.722 g
FBK01S4P10090	M10	90 mm	1.5 mm	6 mm	6.2 mm	22.4 mm	52.722 g
FBK02S4P10100	M10	100 mm	1.5 mm	6 mm	5.5 mm	20 mm	58.277 g



Part number	Size (d)	Length (l)	Thread pitch	Hex key size	Head height (k)	Head diameter (dk)	Weight
FBK01S4P10100	M10	100 mm	1.5 mm	6 mm	6.2 mm	22.4 mm	58.277 g
FBK01S4P10120	M10	120 mm	1.5 mm	6 mm	6.2 mm	22.4 mm	69.387 g
FBK02S4P12020	M12	20 mm	1.75 mm	8 mm	6.5 mm	24 mm	21.412 g
FBK01S4P12020	M12	20 mm	1.75 mm	8 mm	7.44 mm	26.88 mm	21.412 g
FBK02S4P12025	M12	25 mm	1.75 mm	8 mm	6.5 mm	24 mm	25.048 g
FBK01S4P12025	M12	25 mm	1.75 mm	8 mm	7.44 mm	26.88 mm	25.048 g
FBK02S4P12030	M12	30 mm	1.75 mm	8 mm	6.5 mm	24 mm	28.785 g
FBK01S4P12030	M12	30 mm	1.75 mm	8 mm	7.44 mm	26.88 mm	28.785 g
FBK02S4P12035	M12	35 mm	1.75 mm	8 mm	6.5 mm	24 mm	32.421 g
FBK01S4P12035	M12	35 mm	1.75 mm	8 mm	7.44 mm	26.88 mm	32.421 g
FBK02S4P12040	M12	40 mm	1.75 mm	8 mm	6.5 mm	24 mm	36.057 g
FBK01S4P12040	M12	40 mm	1.75 mm	8 mm	7.44 mm	26.88 mm	36.057 g
FBK02S4P12045	M12	45 mm	1.75 mm	8 mm	6.5 mm	24 mm	39.744 g
FBK01S4P12045	M12	45 mm	1.75 mm	8 mm	7.44 mm	26.88 mm	39.744 g
FBK02S4P12050	M12	50 mm	1.75 mm	8 mm	6.5 mm	24 mm	43.43 g
FBK01S4P12050	M12	50 mm	1.75 mm	8 mm	7.44 mm	26.88 mm	43.43 g
FBK02S4P12055	M12	55 mm	1.75 mm	8 mm	6.5 mm	24 mm	48.985 g
FBK01S4P12055	M12	55 mm	1.75 mm	8 mm	7.44 mm	26.88 mm	48.985 g
FBK02S4P12060	M12	60 mm	1.75 mm	8 mm	6.5 mm	24 mm	54.54 g
FBK01S4P12060	M12	60 mm	1.75 mm	8 mm	7.44 mm	26.88 mm	54.54 g
FBK02S4P12070	M12	70 mm	1.75 mm	8 mm	6.5 mm	24 mm	63.529 g
FBK01S4P12070	M12	70 mm	1.75 mm	8 mm	7.44 mm	26.88 mm	63.529 g
FBK02S4P12080	M12	80 mm	1.75 mm	8 mm	6.5 mm	24 mm	72.518 g
FBK01S4P12080	M12	80 mm	1.75 mm	8 mm	7.44 mm	26.88 mm	72.518 g
FBK02S4P12090	M12	90 mm	1.75 mm	8 mm	6.5 mm	24 mm	81.507 g
FBK01S4P12090	M12	90 mm	1.75 mm	8 mm	7.44 mm	26.88 mm	81.507 g
FBK02S4P12100	M12	100 mm	1.75 mm	8 mm	6.5 mm	24 mm	90.496 g
FBK01S4P12100	M12	100 mm	1.75 mm	8 mm	7.44 mm	26.88 mm	90.496 g
FBK02S4P12110	M12	110 mm	1.75 mm	8 mm	6.5 mm	24 mm	99.485 g
FBK01S4P12110	M12	110 mm	1.75 mm	8 mm	7.44 mm	26.88 mm	99.485 g
FBK01S4P12120	M12	120 mm	1.75 mm	8 mm	7.44 mm	26.88 mm	108.474 g
FBK02S4P14040	M14	40 mm	2 mm	10 mm	7 mm	27 mm	49.278 g
FBK01S4P16025	M16	25 mm	2 mm	10 mm	8.8 mm	33.6 mm	45.652 g
FBK02S4P16030	M16	30 mm	2 mm	10 mm	7.5 mm	30 mm	52.318 g
FBK01S4P16030	M16	30 mm	2 mm	10 mm	8.8 mm	33.6 mm	52.318 g
FBK02S4P16035	M16	35 mm	2 mm	10 mm	7.5 mm	30 mm	58.984 g
FBK01S4P16035	M16	35 mm	2 mm	10 mm	8.8 mm	33.6 mm	58.984 g



Part number	Size (d)	Length (l)	Thread pitch	Hex key size	Head height (k)	Head diameter (dk)	Weight
FBK02S4P16040	M16	40 mm	2 mm	10 mm	7.5 mm	30 mm	65.751 g
FBK01S4P16040	M16	40 mm	2 mm	10 mm	8.8 mm	33.6 mm	65.751 g
FBK02S4P16045	M16	45 mm	2 mm	10 mm	7.5 mm	30 mm	72.468 g
FBK01S4P16045	M16	45 mm	2 mm	10 mm	8.8 mm	33.6 mm	72.468 g
FBK02S4P16050	M16	50 mm	2 mm	10 mm	7.5 mm	30 mm	79.184 g
FBK01S4P16050	M16	50 mm	2 mm	10 mm	8.8 mm	33.6 mm	79.184 g
FBK02S4P16055	M16	55 mm	2 mm	10 mm	7.5 mm	30 mm	85.9 g
FBK01S4P16055	M16	55 mm	2 mm	10 mm	8.8 mm	33.6 mm	85.9 g
FBK02S4P16060	M16	60 mm	2 mm	10 mm	7.5 mm	30 mm	92.617 g
FBK01S4P16060	M16	60 mm	2 mm	10 mm	8.8 mm	33.6 mm	92.617 g
FBK02S4P16070	M16	70 mm	2 mm	10 mm	7.5 mm	30 mm	112.11 g
FBK01S4P16070	M16	70 mm	2 mm	10 mm	8.8 mm	33.6 mm	112.11 g
FBK02S4P16080	M16	80 mm	2 mm	10 mm	7.5 mm	30 mm	128.27 g
FBK01S4P16080	M16	80 mm	2 mm	10 mm	8.8 mm	33.6 mm	128.27 g
FBK02S4P16090	M16	90 mm	2 mm	10 mm	7.5 mm	30 mm	144.43 g
FBK01S4P16090	M16	90 mm	2 mm	10 mm	8.8 mm	33.6 mm	144.43 g
FBK02S4P16100	M16	100 mm	2 mm	10 mm	7.5 mm	30 mm	160.59 g
FBK01S4P16100	M16	100 mm	2 mm	10 mm	8.8 mm	33.6 mm	160.59 g
FBK01S4P16110	M16	110 mm	2 mm	10 mm	8.8 mm	33.6 mm	176.75 g
FBK01S4P16120	M16	120 mm	2 mm	10 mm	8.8 mm	33.6 mm	192.91 g
FBK01S4P16130	M16	130 mm	2 mm	10 mm	8.8 mm	33.6 mm	209.07 g
FBK01S4P16140	M16	140 mm	2 mm	10 mm	8.8 mm	33.6 mm	225.23 g
FBK01S4P16150	M16	150 mm	2 mm	10 mm	8.8 mm	33.6 mm	241.39 g
FBK02S4P20030	M20	30 mm	2.5 mm	12 mm	8.5 mm	36 mm	81.608 g
FBK02S4P20035	M20	35 mm	2.5 mm	12 mm	8.5 mm	36 mm	92.314 g
FBK02S4P20040	M20	40 mm	2.5 mm	12 mm	8.5 mm	36 mm	103.02 g
FBK01S4P20040	M20	40 mm	2.5 mm	12 mm	10.16 mm	40.32 mm	103.02 g
FBK02S4P20045	M20	45 mm	2.5 mm	12 mm	8.5 mm	36 mm	113.625 g
FBK01S4P20045	M20	45 mm	2.5 mm	12 mm	10.16 mm	40.32 mm	113.625 g
FBK02S4P20050	M20	50 mm	2.5 mm	12 mm	8.5 mm	36 mm	124.23 g
FBK01S4P20050	M20	50 mm	2.5 mm	12 mm	10.16 mm	40.32 mm	124.23 g
FBK02S4P20055	M20	55 mm	2.5 mm	12 mm	8.5 mm	36 mm	134.33 g
FBK01S4P20055	M20	55 mm	2.5 mm	12 mm	10.16 mm	40.32 mm	134.33 g
FBK02S4P20060	M20	60 mm	2.5 mm	12 mm	8.5 mm	36 mm	144.43 g
FBK01S4P20060	M20	60 mm	2.5 mm	12 mm	10.16 mm	40.32 mm	144.43 g
FBK02S4P20065	M20	65 mm	2.5 mm	12 mm	8.5 mm	36 mm	155.035 g
FBK02S4P20070	M20	70 mm	2.5 mm	12 mm	8.5 mm	36 mm	165.64 g



Part number	Size (d)	Length (l)	Thread pitch	Hex key size	Head height (k)	Head diameter (dk)	Weight
FBK01S4P20070	M20	70 mm	2.5 mm	12 mm	10.16 mm	40.32 mm	165.64 g
FBK02S4P20080	M20	80 mm	2.5 mm	12 mm	8.5 mm	36 mm	202 g
FBK01S4P20080	M20	80 mm	2.5 mm	12 mm	10.16 mm	40.32 mm	202 g
FBK02S4P20090	M20	90 mm	2.5 mm	12 mm	8.5 mm	36 mm	228.26 g
FBK01S4P20090	M20	90 mm	2.5 mm	12 mm	10.16 mm	40.32 mm	228.26 g
FBK02S4P20100	M20	100 mm	2.5 mm	12 mm	8.5 mm	36 mm	255.53 g
FBK01S4P20100	M20	100 mm	2.5 mm	12 mm	10.16 mm	40.32 mm	255.53 g
FBK02S4P20110	M20	110 mm	2.5 mm	12 mm	8.5 mm	36 mm	282.8 g
FBK01S4P20110	M20	110 mm	2.5 mm	12 mm	10.16 mm	40.32 mm	282.8 g
FBK01S4P20120	M20	120 mm	2.5 mm	12 mm	10.16 mm	40.32 mm	310.07 g
FBK01S4P20130	M20	130 mm	2.5 mm	12 mm	10.16 mm	40.32 mm	337.34 g
FBK01S4P20140	M20	140 mm	2.5 mm	12 mm	10.16 mm	40.32 mm	364.61 g
FBK01S4P20150	M20	150 mm	2.5 mm	12 mm	10.16 mm	40.32 mm	391.88 g
FBK02S4P24050	M24	50 mm	3 mm	14 mm	14 mm	39 mm	180.79 g
FBK02S4P24055	M24	55 mm	3 mm	–	–	–	195.94 g
FBK02S4P24060	M24	60 mm	3 mm	–	–	–	211.09 g
FBK02S4P24070	M24	70 mm	3 mm	–	–	–	241.39 g
FBK02S4P24080	M24	80 mm	3 mm	14 mm	14 mm	39 mm	271.69 g
FBK02S4P24090	M24	90 mm	3 mm	–	–	–	301.99 g
FBK02S4P24100	M24	100 mm	3 mm	14 mm	14 mm	39 mm	343.4 g
FBK02S4P24110	M24	110 mm	3 mm	–	–	–	384.81 g
FBK02S4P24120	M24	120 mm	3 mm	–	–	–	426.22 g
FBK02S4P24140	M24	140 mm	3 mm	–	–	–	509.04 g
FBK02S4P24150	M24	150 mm	3 mm	14 mm	14 mm	39 mm	550.45 g

Part numbers: 289

STANDARDS & CERTIFICATES

Standards

DIN 7991 – Hex Socket Countersunk Head Screw

ISO 10642 – Hex Socket Countersunk Head Screw

