


Hex Head Screw DIN 933 / ISO 4017 - Steel 5.6 (AD W7), Hot-dip galvanized

Hex Head Screw to DIN 933 / ISO 4017, in the sizes, grades and finishes listed.

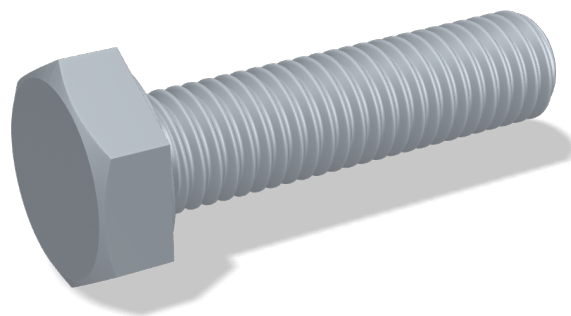

TECHNICAL DATA

Dimensions


Thread form	Metric ISO thread
-------------	-------------------

Materials & Finish

Head type	Hexagon
Drive type	External hexagon

Property class / grade	5.6 (AD W7)
Material	Steel
Surface finish	Hot-dip galvanized

DIMENSIONS

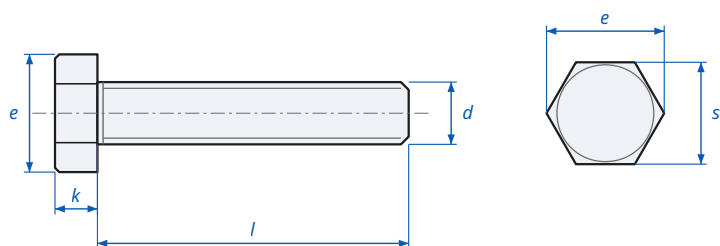

d	Thread diameter
l	Length
k	Head height
s	Width across flats (WAF)
e	Width across corners

Hex Head Screw DIN 933 / ISO 4017 - dimensions

AVAILABLE PART NUMBERS

Part number	Size (d)	Length (l)	Thread pitch	Width across flats (s)	Width across corners (e)	Head height (k)	Weight
FBH06W5H12030	M12	30 mm	1.75 mm	19 mm	21.1 mm	7.5 mm	37.7 g
FBH03W5H12030	M12	30 mm	1.75 mm	18 mm	20.03 mm	7.5 mm	37.7 g
FBH06W5H12035	M12	35 mm	1.75 mm	19 mm	21.1 mm	7.5 mm	41.3 g
FBH03W5H12035	M12	35 mm	1.75 mm	18 mm	20.03 mm	7.5 mm	41.3 g
FBH06W5H12040	M12	40 mm	1.75 mm	19 mm	21.1 mm	7.5 mm	44.9 g
FBH03W5H12040	M12	40 mm	1.75 mm	18 mm	20.03 mm	7.5 mm	44.9 g
FBH06W5H12045	M12	45 mm	1.75 mm	19 mm	21.1 mm	7.5 mm	48.5 g
FBH03W5H12045	M12	45 mm	1.75 mm	18 mm	20.03 mm	7.5 mm	48.5 g



Part number	Size (d)	Length (l)	Thread pitch	Width across flats (s)	Width across corners (e)	Head height (k)	Weight
FBH01W5H16035	M16	35 mm	2 mm	24 mm	26.75 mm	10 mm	83.5 g
FBH01W5H16040	M16	40 mm	2 mm	24 mm	26.75 mm	10 mm	90.2 g
FBH01W5H16045	M16	45 mm	2 mm	24 mm	26.75 mm	10 mm	97.1 g
FBH01W5H16050	M16	50 mm	2 mm	24 mm	26.75 mm	10 mm	103 g
FBH01W5H16055	M16	55 mm	2 mm	24 mm	26.75 mm	10 mm	110 g
FBH01W5H16060	M16	60 mm	2 mm	24 mm	26.75 mm	10 mm	117 g
FBH01W5H20040	M20	40 mm	2.5 mm	30 mm	33.53 mm	12.5 mm	155 g
FBH01W5H20045	M20	45 mm	2.5 mm	30 mm	33.53 mm	12.5 mm	165 g
FBH01W5H20050	M20	50 mm	2.5 mm	30 mm	33.53 mm	12.5 mm	176 g
FBH01W5H20055	M20	55 mm	2.5 mm	30 mm	33.53 mm	12.5 mm	186 g
FBH01W5H20060	M20	60 mm	2.5 mm	30 mm	33.53 mm	12.5 mm	196 g
FBH01W5H20065	M20	65 mm	2.5 mm	30 mm	33.53 mm	12.5 mm	207 g
FBH01W5H20070	M20	70 mm	2.5 mm	30 mm	33.53 mm	12.5 mm	217 g
FBH01W5H20075	M20	75 mm	2.5 mm	30 mm	33.53 mm	12.5 mm	227 g
FBH01W5H24050	M24	50 mm	3 mm	36 mm	39.98 mm	15 mm	274 g
FBH01W5H24055	M24	55 mm	3 mm	36 mm	39.98 mm	15 mm	289 g
FBH01W5H24060	M24	60 mm	3 mm	36 mm	39.98 mm	15 mm	304 g
FBH01W5H24065	M24	65 mm	3 mm	36 mm	39.98 mm	15 mm	319 g
FBH01W5H24070	M24	70 mm	3 mm	36 mm	39.98 mm	15 mm	334 g
FBH01W5H24075	M24	75 mm	3 mm	36 mm	39.98 mm	15 mm	348 g
FBH01W5H24080	M24	80 mm	3 mm	36 mm	39.98 mm	15 mm	363 g

Part numbers: 29

STANDARDS & CERTIFICATES

Standards

DIN 933 – Hex Head Screw

ISO 4017 – Hex Head Screw

