


Slotted Countersunk Head Screw DIN 963 / ISO 2009 - Stainless steel A2, Plain

Slotted Countersunk Head Screw to DIN 963 / ISO 2009, in the sizes, grades and finishes listed.

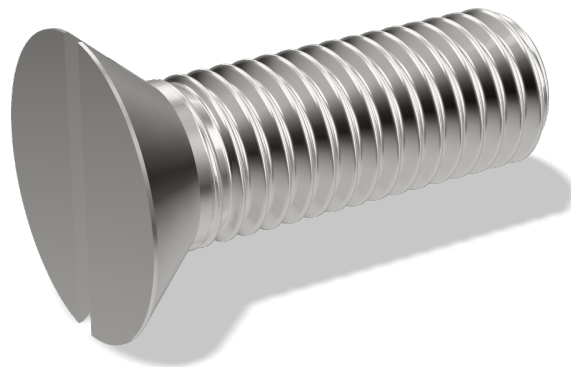

TECHNICAL DATA

Dimensions



Thread form	Metric ISO thread
-------------	-------------------

Materials & Finish

Head type	Countersunk
Drive type	Slotted

Property class / grade	A2 stainless
Material	Stainless steel
Surface finish	Plain

DIMENSIONS

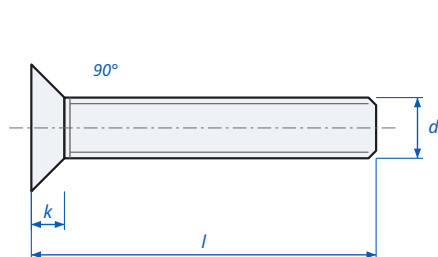

d	Thread diameter
l	Length
k	Head height
dk	Head diameter

Slotted Countersunk Head Screw DIN 963 / ISO 2009 - dimensions

AVAILABLE PART NUMBERS

Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Weight
FBK03A2P01002	M1	2 mm	0.25 mm	0.6 mm	1.9 mm	0.0142 g
FBK03A2P01003	M1	3 mm	0.25 mm	0.6 mm	1.9 mm	0.0186 g
FBK03A2P01004	M1	4 mm	0.25 mm	0.6 mm	1.9 mm	0.0229 g
FBK03A2P01005	M1	5 mm	0.25 mm	0.6 mm	1.9 mm	0.0274 g
FBK03A2P01006	M1	6 mm	0.25 mm	0.6 mm	1.9 mm	0.0317 g
FBK03A2P01008	M1	8 mm	0.25 mm	0.6 mm	1.9 mm	0.0404 g



Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Weight
FBK03A2P01010	M1	10 mm	0.25 mm	0.6 mm	1.9 mm	0.0492 g
FBK03A2PB2002	M1.2	2 mm	0.25 mm	0.72 mm	2.3 mm	0.0227 g
FBK03A2PB2003	M1.2	3 mm	0.25 mm	0.72 mm	2.3 mm	0.0295 g
FBK03A2PB2004	M1.2	4 mm	0.25 mm	0.72 mm	2.3 mm	0.0362 g
FBK03A2PB2005	M1.2	5 mm	0.25 mm	0.72 mm	2.3 mm	0.0428 g
FBK03A2PB2006	M1.2	6 mm	0.25 mm	0.72 mm	2.3 mm	0.0496 g
FBK03A2PB2008	M1.2	8 mm	0.25 mm	0.72 mm	2.3 mm	0.063 g
FBK03A2PB2010	M1.2	10 mm	0.25 mm	0.72 mm	2.3 mm	0.0764 g
FBK03A2PB4003	M1.4	3 mm	0.3 mm	0.84 mm	2.6 mm	0.0411 g
FBK03A2PB4004	M1.4	4 mm	0.3 mm	0.84 mm	2.6 mm	0.0501 g
FBK03A2PB4005	M1.4	5 mm	0.3 mm	0.84 mm	2.6 mm	0.0592 g
FBK03A2PB4006	M1.4	6 mm	0.3 mm	0.84 mm	2.6 mm	0.0682 g
FBK03A2PB4008	M1.4	8 mm	0.3 mm	0.84 mm	2.6 mm	0.0863 g
FBK03A2PB4010	M1.4	10 mm	0.3 mm	0.84 mm	2.6 mm	0.1043 g
FBK03A2PB4012	M1.4	12 mm	0.3 mm	0.84 mm	2.6 mm	0.1224 g
FBK03A2PB6002	M1.6	2 mm	0.35 mm	0.96 mm	3 mm	0.0465 g
FBK03A2PB6003	M1.6	3 mm	0.35 mm	0.96 mm	3 mm	0.0586 g
FBK03A2PB6004	M1.6	4 mm	0.35 mm	0.96 mm	3 mm	0.0697 g
FBK03A2PB6005	M1.6	5 mm	0.35 mm	0.96 mm	3 mm	0.0818 g
FBK03A2PB6006	M1.6	6 mm	0.35 mm	0.96 mm	3 mm	0.0939 g
FBK03A2PB6008	M1.6	8 mm	0.35 mm	0.96 mm	3 mm	0.1172 g
FBK03A2PB6010	M1.6	10 mm	0.35 mm	0.96 mm	3 mm	0.1404 g
FBK03A2PB6012	M1.6	12 mm	0.35 mm	0.96 mm	3 mm	0.1636 g
FBK03A2PB6014	M1.6	14 mm	0.35 mm	0.96 mm	3 mm	0.1868 g
FBK03A2PB6016	M1.6	16 mm	0.35 mm	0.96 mm	3 mm	0.2101 g
FBK03A2PB7003	M1.7	3 mm	0.35 mm	—	—	—
FBK03A2PB7005	M1.7	5 mm	0.35 mm	—	—	—
FBK03A2PB7010	M1.7	10 mm	0.35 mm	—	—	—
FBK07A2P02003	M2	3 mm	0.4 mm	1.2 mm	3.8 mm	0.101 g
FBK07A2P02004	M2	4 mm	0.4 mm	1.2 mm	3.8 mm	0.1202 g
FBK07A2P02005	M2	5 mm	0.4 mm	1.2 mm	3.8 mm	0.1384 g
FBK07A2P02006	M2	6 mm	0.4 mm	1.2 mm	3.8 mm	0.1576 g
FBK07A2P02008	M2	8 mm	0.4 mm	1.2 mm	3.8 mm	0.1949 g
FBK07A2P02010	M2	10 mm	0.4 mm	1.2 mm	3.8 mm	0.2333 g
FBK07A2P02012	M2	12 mm	0.4 mm	1.2 mm	3.8 mm	0.2707 g
FBK07A2P02014	M2	14 mm	0.4 mm	1.2 mm	3.8 mm	0.3091 g
FBK07A2P02016	M2	16 mm	0.4 mm	1.2 mm	3.8 mm	0.3464 g



Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Weight
FBK07A2P02018	M2	18 mm	0.4 mm	1.2 mm	3.8 mm	0.3848 g
FBK07A2P02020	M2	20 mm	0.4 mm	1.2 mm	3.8 mm	0.4232 g
FBK07A2P02022	M2	22 mm	0.4 mm	1.2 mm	3.8 mm	0.4616 g
FBK07A2P02025	M2	25 mm	0.4 mm	1.2 mm	3.8 mm	0.5191 g
FBK07A2P02028	M2	28 mm	0.4 mm	1.2 mm	3.8 mm	0.5767 g
FBK07A2P02030	M2	30 mm	0.4 mm	1.2 mm	3.8 mm	0.6151 g
FBK07A2P02035	M2	35 mm	0.4 mm	1.2 mm	3.8 mm	0.711 g
FBK07A2P02040	M2	40 mm	0.4 mm	1.2 mm	3.8 mm	0.807 g
FBK03A2PC3003	M2.3	3 mm	0.4 mm	–	–	–
FBK03A2PC3004	M2.3	4 mm	0.4 mm	–	–	–
FBK03A2PC3005	M2.3	5 mm	0.4 mm	–	–	–
FBK03A2PC3006	M2.3	6 mm	0.4 mm	–	–	–
FBK03A2PC3008	M2.3	8 mm	0.4 mm	–	–	–
FBK03A2PC3010	M2.3	10 mm	0.4 mm	–	–	–
FBK03A2PC3012	M2.3	12 mm	0.4 mm	–	–	–
FBK03A2PC3014	M2.3	14 mm	0.4 mm	–	–	–
FBK03A2PC3016	M2.3	16 mm	0.4 mm	–	–	–
FBK03A2PC3018	M2.3	18 mm	0.4 mm	–	–	–
FBK03A2PC3020	M2.3	20 mm	0.4 mm	–	–	–
FBK03A2PC3022	M2.3	22 mm	0.4 mm	–	–	–
FBK07A2PC5003	M2.5	3 mm	0.45 mm	1.5 mm	4.7 mm	0.1767 g
FBK07A2PC5004	M2.5	4 mm	0.45 mm	1.5 mm	4.7 mm	0.2081 g
FBK07A2PC5005	M2.5	5 mm	0.45 mm	1.5 mm	4.7 mm	0.2384 g
FBK07A2PC5006	M2.5	6 mm	0.45 mm	1.5 mm	4.7 mm	0.2687 g
FBK07A2PC5008	M2.5	8 mm	0.45 mm	1.5 mm	4.7 mm	0.3293 g
FBK07A2PC5010	M2.5	10 mm	0.45 mm	1.5 mm	4.7 mm	0.3899 g
FBK07A2PC5012	M2.5	12 mm	0.45 mm	1.5 mm	4.7 mm	0.4505 g
FBK07A2PC5014	M2.5	14 mm	0.45 mm	1.5 mm	4.7 mm	0.5121 g
FBK07A2PC5016	M2.5	16 mm	0.45 mm	1.5 mm	4.7 mm	0.5727 g
FBK07A2PC5018	M2.5	18 mm	0.45 mm	1.5 mm	4.7 mm	0.6333 g
FBK07A2PC5020	M2.5	20 mm	0.45 mm	1.5 mm	4.7 mm	0.6939 g
FBK07A2PC5022	M2.5	22 mm	0.45 mm	1.5 mm	4.7 mm	0.7545 g
FBK07A2PC5025	M2.5	25 mm	0.45 mm	1.5 mm	4.7 mm	0.8464 g
FBK07A2PC5028	M2.5	28 mm	0.45 mm	1.5 mm	4.7 mm	0.9383 g
FBK07A2PC5030	M2.5	30 mm	0.45 mm	1.5 mm	4.7 mm	0.9996 g
FBK07A2PC5035	M2.5	35 mm	0.45 mm	1.5 mm	4.7 mm	1.152 g
FBK03A2PC6003	M2.6	3 mm	0.45 mm	–	–	–



Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Weight
FBK03A2PC6004	M2.6	4 mm	0.45 mm	–	–	–
FBK03A2PC6005	M2.6	5 mm	0.45 mm	–	–	–
FBK03A2PC6006	M2.6	6 mm	0.45 mm	–	–	–
FBK03A2PC6008	M2.6	8 mm	0.45 mm	–	–	–
FBK03A2PC6010	M2.6	10 mm	0.45 mm	–	–	–
FBK03A2PC6012	M2.6	12 mm	0.45 mm	–	–	–
FBK03A2PC6016	M2.6	16 mm	0.45 mm	–	–	–
FBK03A2PC6020	M2.6	20 mm	0.45 mm	–	–	–
FBK03A2P03003	M3	3 mm	0.5 mm	1.65 mm	5.6 mm	0.2475 g
FBK03A2P03004	M3	4 mm	0.5 mm	1.65 mm	5.6 mm	0.2929 g
FBK03A2P03005	M3	5 mm	0.5 mm	1.65 mm	5.6 mm	0.3384 g
FBK03A2P03006	M3	6 mm	0.5 mm	1.65 mm	5.6 mm	0.3828 g
FBK03A2P03008	M3	8 mm	0.5 mm	1.65 mm	5.6 mm	0.4717 g
FBK03A2P03010	M3	10 mm	0.5 mm	1.65 mm	5.6 mm	0.5606 g
FBK03A2P03012	M3	12 mm	0.5 mm	1.65 mm	5.6 mm	0.6494 g
FBK03A2P03014	M3	14 mm	0.5 mm	1.65 mm	5.6 mm	0.7383 g
FBK03A2P03016	M3	16 mm	0.5 mm	1.65 mm	5.6 mm	0.8282 g
FBK03A2P03018	M3	18 mm	0.5 mm	1.65 mm	5.6 mm	0.9171 g
FBK03A2P03020	M3	20 mm	0.5 mm	1.65 mm	5.6 mm	1.006 g
FBK03A2P03022	M3	22 mm	0.5 mm	1.65 mm	5.6 mm	1.091 g
FBK03A2P03025	M3	25 mm	0.5 mm	1.65 mm	5.6 mm	1.232 g
FBK03A2P03028	M3	28 mm	0.5 mm	1.65 mm	5.6 mm	1.364 g
FBK03A2P03030	M3	30 mm	0.5 mm	1.65 mm	5.6 mm	1.454 g
FBK03A2P03035	M3	35 mm	0.5 mm	1.65 mm	5.6 mm	1.682 g
FBK03A2P03040	M3	40 mm	0.5 mm	1.65 mm	5.6 mm	1.909 g
FBK03A2P03045	M3	45 mm	0.5 mm	1.65 mm	5.6 mm	2.136 g
FBK03A2P03050	M3	50 mm	0.5 mm	1.65 mm	5.6 mm	2.363 g
FBK03A2P03055	M3	55 mm	0.5 mm	1.65 mm	5.6 mm	2.591 g
FBK03A2P03060	M3	60 mm	0.5 mm	1.65 mm	5.6 mm	2.818 g
FBK03A2PD5004	M3.5	4 mm	0.6 mm	1.93 mm	6.5 mm	0.4383 g
FBK03A2PD5005	M3.5	5 mm	0.6 mm	1.93 mm	6.5 mm	0.4989 g
FBK03A2PD5006	M3.5	6 mm	0.6 mm	1.93 mm	6.5 mm	0.5595 g
FBK03A2PD5008	M3.5	8 mm	0.6 mm	1.93 mm	6.5 mm	0.6797 g
FBK03A2PD5010	M3.5	10 mm	0.6 mm	1.93 mm	6.5 mm	0.7999 g
FBK03A2PD5012	M3.5	12 mm	0.6 mm	1.93 mm	6.5 mm	0.9201 g
FBK03A2PD5014	M3.5	14 mm	0.6 mm	1.93 mm	6.5 mm	1.04 g
FBK03A2PD5016	M3.5	16 mm	0.6 mm	1.93 mm	6.5 mm	1.161 g



Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Weight
FBK03A2PD5018	M3.5	18 mm	0.6 mm	1.93 mm	6.5 mm	1.283 g
FBK03A2PD5020	M3.5	20 mm	0.6 mm	1.93 mm	6.5 mm	1.404 g
FBK03A2PD5022	M3.5	22 mm	0.6 mm	1.93 mm	6.5 mm	1.525 g
FBK03A2PD5025	M3.5	25 mm	0.6 mm	1.93 mm	6.5 mm	1.707 g
FBK03A2PD5028	M3.5	28 mm	0.6 mm	1.93 mm	6.5 mm	1.889 g
FBK03A2PD5030	M3.5	30 mm	0.6 mm	1.93 mm	6.5 mm	2.01 g
FBK03A2PD5035	M3.5	35 mm	0.6 mm	1.93 mm	6.5 mm	2.313 g
FBK03A2PD5040	M3.5	40 mm	0.6 mm	1.93 mm	6.5 mm	2.616 g
FBK03A2PD5045	M3.5	45 mm	0.6 mm	1.93 mm	6.5 mm	2.919 g
FBK03A2PD5050	M3.5	50 mm	0.6 mm	1.93 mm	6.5 mm	3.222 g
FBK03A2PD5055	M3.5	55 mm	0.6 mm	1.93 mm	6.5 mm	3.525 g
FBK03A2PD5060	M3.5	60 mm	0.6 mm	1.93 mm	6.5 mm	3.828 g
FBK03A2P04004	M4	4 mm	0.7 mm	2.2 mm	7.5 mm	0.604 g
FBK03A2P04005	M4	5 mm	0.7 mm	2.2 mm	7.5 mm	0.6828 g
FBK03A2P04006	M4	6 mm	0.7 mm	2.2 mm	7.5 mm	0.7615 g
FBK03A2P04008	M4	8 mm	0.7 mm	2.2 mm	7.5 mm	0.9191 g
FBK03A2P04010	M4	10 mm	0.7 mm	2.2 mm	7.5 mm	1.071 g
FBK03A2P04012	M4	12 mm	0.7 mm	2.2 mm	7.5 mm	1.232 g
FBK03A2P04014	M4	14 mm	0.7 mm	2.2 mm	7.5 mm	1.384 g
FBK03A2P04016	M4	16 mm	0.7 mm	2.2 mm	7.5 mm	1.545 g
FBK03A2P04018	M4	18 mm	0.7 mm	2.2 mm	7.5 mm	1.697 g
FBK03A2P04020	M4	20 mm	0.7 mm	2.2 mm	7.5 mm	1.858 g
FBK03A2P04022	M4	22 mm	0.7 mm	2.2 mm	7.5 mm	2.01 g
FBK03A2P04025	M4	25 mm	0.7 mm	2.2 mm	7.5 mm	2.242 g
FBK03A2P04028	M4	28 mm	0.7 mm	2.2 mm	7.5 mm	2.485 g
FBK03A2P04030	M4	30 mm	0.7 mm	2.2 mm	7.5 mm	2.636 g
FBK03A2P04035	M4	35 mm	0.7 mm	2.2 mm	7.5 mm	3.03 g
FBK03A2P04040	M4	40 mm	0.7 mm	2.2 mm	7.5 mm	3.414 g
FBK03A2P04045	M4	45 mm	0.7 mm	2.2 mm	7.5 mm	3.798 g
FBK03A2P04050	M4	50 mm	0.7 mm	2.2 mm	7.5 mm	4.181 g
FBK03A2P04055	M4	55 mm	0.7 mm	2.2 mm	7.5 mm	4.565 g
FBK03A2P04060	M4	60 mm	0.7 mm	2.2 mm	7.5 mm	4.949 g
FBK03A2P04065	M4	65 mm	0.7 mm	2.2 mm	7.5 mm	5.333 g
FBK03A2P04070	M4	70 mm	0.7 mm	2.2 mm	7.5 mm	5.717 g
FBK03A2P04075	M4	75 mm	0.7 mm	2.2 mm	7.5 mm	6.1 g
FBK03A2P04080	M4	80 mm	0.7 mm	2.2 mm	7.5 mm	6.484 g
FBK03A2P04085	M4	85 mm	0.7 mm	2.2 mm	7.5 mm	6.868 g



Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Weight
FBK03A2P04090	M4	90 mm	0.7 mm	2.2 mm	7.5 mm	7.252 g
FBK03A2P04100	M4	100 mm	0.7 mm	2.2 mm	7.5 mm	8.019 g
FBK03A2P05006	M5	6 mm	0.8 mm	2.5 mm	9.2 mm	1.222 g
FBK03A2P05008	M5	8 mm	0.8 mm	2.5 mm	9.2 mm	1.464 g
FBK03A2P05010	M5	10 mm	0.8 mm	2.5 mm	9.2 mm	1.717 g
FBK03A2P05012	M5	12 mm	0.8 mm	2.5 mm	9.2 mm	1.97 g
FBK03A2P05014	M5	14 mm	0.8 mm	2.5 mm	9.2 mm	2.212 g
FBK03A2P05016	M5	16 mm	0.8 mm	2.5 mm	9.2 mm	2.464 g
FBK03A2P05018	M5	18 mm	0.8 mm	2.5 mm	9.2 mm	2.717 g
FBK03A2P05020	M5	20 mm	0.8 mm	2.5 mm	9.2 mm	2.969 g
FBK03A2P05022	M5	22 mm	0.8 mm	2.5 mm	9.2 mm	3.212 g
FBK03A2P05025	M5	25 mm	0.8 mm	2.5 mm	9.2 mm	3.585 g
FBK03A2P05028	M5	28 mm	0.8 mm	2.5 mm	9.2 mm	3.969 g
FBK03A2P05030	M5	30 mm	0.8 mm	2.5 mm	9.2 mm	4.202 g
FBK03A2P05035	M5	35 mm	0.8 mm	2.5 mm	9.2 mm	4.697 g
FBK03A2P05040	M5	40 mm	0.8 mm	2.5 mm	9.2 mm	5.454 g
FBK03A2P05045	M5	45 mm	0.8 mm	2.5 mm	9.2 mm	6.08 g
FBK03A2P05050	M5	50 mm	0.8 mm	2.5 mm	9.2 mm	6.717 g
FBK03A2P05055	M5	55 mm	0.8 mm	2.5 mm	9.2 mm	7.353 g
FBK03A2P05060	M5	60 mm	0.8 mm	2.5 mm	9.2 mm	7.989 g
FBK03A2P05065	M5	65 mm	0.8 mm	2.5 mm	9.2 mm	8.625 g
FBK03A2P05070	M5	70 mm	0.8 mm	2.5 mm	9.2 mm	9.262 g
FBK03A2P05075	M5	75 mm	0.8 mm	2.5 mm	9.2 mm	9.898 g
FBK03A2P05080	M5	80 mm	0.8 mm	2.5 mm	9.2 mm	10.534 g
FBK03A2P05085	M5	85 mm	0.8 mm	2.5 mm	9.2 mm	11.171 g
FBK03A2P05090	M5	90 mm	0.8 mm	2.5 mm	9.2 mm	11.807 g
FBK03A2P05095	M5	95 mm	0.8 mm	2.5 mm	9.2 mm	12.443 g
FBK03A2P05100	M5	100 mm	0.8 mm	2.5 mm	9.2 mm	13.079 g
FBK03A2P05120	M5	120 mm	0.8 mm	2.5 mm	9.2 mm	15.625 g
FBK03A2P06006	M6	6 mm	1 mm	3 mm	11 mm	1.858 g
FBK03A2P06008	M6	8 mm	1 mm	3 mm	11 mm	2.212 g
FBK03A2P06010	M6	10 mm	1 mm	3 mm	11 mm	2.565 g
FBK03A2P06012	M6	12 mm	1 mm	3 mm	11 mm	2.919 g
FBK03A2P06014	M6	14 mm	1 mm	3 mm	11 mm	3.283 g
FBK03A2P06016	M6	16 mm	1 mm	3 mm	11 mm	3.636 g
FBK03A2P06018	M6	18 mm	1 mm	3 mm	11 mm	3.99 g
FBK03A2P06020	M6	20 mm	1 mm	3 mm	11 mm	4.353 g



Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Weight
FBK03A2P06022	M6	22 mm	1 mm	3 mm	11 mm	4.707 g
FBK03A2P06025	M6	25 mm	1 mm	3 mm	11 mm	5.242 g
FBK03A2P06028	M6	28 mm	1 mm	3 mm	11 mm	5.777 g
FBK03A2P06030	M6	30 mm	1 mm	3 mm	11 mm	6.141 g
FBK03A2P06035	M6	35 mm	1 mm	3 mm	11 mm	7.03 g
FBK03A2P06040	M6	40 mm	1 mm	3 mm	11 mm	7.918 g
FBK03A2P06045	M6	45 mm	1 mm	3 mm	11 mm	8.817 g
FBK03A2P06050	M6	50 mm	1 mm	3 mm	11 mm	9.706 g
FBK03A2P06055	M6	55 mm	1 mm	3 mm	11 mm	10.595 g
FBK03A2P06060	M6	60 mm	1 mm	3 mm	11 mm	11.484 g
FBK03A2P06065	M6	65 mm	1 mm	3 mm	11 mm	12.373 g
FBK03A2P06070	M6	70 mm	1 mm	3 mm	11 mm	13.261 g
FBK03A2P06075	M6	75 mm	1 mm	3 mm	11 mm	14.15 g
FBK03A2P06080	M6	80 mm	1 mm	3 mm	11 mm	15.039 g
FBK03A2P06085	M6	85 mm	1 mm	3 mm	11 mm	15.928 g
FBK03A2P06090	M6	90 mm	1 mm	3 mm	11 mm	16.816 g
FBK03A2P06100	M6	100 mm	1 mm	3 mm	11 mm	18.594 g
FBK03A2P06110	M6	110 mm	1 mm	3 mm	11 mm	20.372 g
FBK03A2P06120	M6	120 mm	1 mm	3 mm	11 mm	22.149 g
FBK03A2P06130	M6	130 mm	1 mm	3 mm	11 mm	23.927 g
FBK03A2P06140	M6	140 mm	1 mm	3 mm	11 mm	25.704 g
FBK03A2P08010	M8	10 mm	1.25 mm	4 mm	14.5 mm	5.08 g
FBK03A2P08012	M8	12 mm	1.25 mm	4 mm	14.5 mm	5.727 g
FBK03A2P08014	M8	14 mm	1.25 mm	4 mm	14.5 mm	6.363 g
FBK03A2P08016	M8	16 mm	1.25 mm	4 mm	14.5 mm	7.009 g
FBK03A2P08018	M8	18 mm	1.25 mm	4 mm	14.5 mm	7.646 g
FBK03A2P08020	M8	20 mm	1.25 mm	4 mm	14.5 mm	8.292 g
FBK03A2P08022	M8	22 mm	1.25 mm	4 mm	14.5 mm	8.928 g
FBK03A2P08025	M8	25 mm	1.25 mm	4 mm	14.5 mm	9.888 g
FBK03A2P08030	M8	30 mm	1.25 mm	4 mm	14.5 mm	11.514 g
FBK03A2P08035	M8	35 mm	1.25 mm	4 mm	14.5 mm	13.13 g
FBK03A2P08040	M8	40 mm	1.25 mm	4 mm	14.5 mm	14.746 g
FBK03A2P08045	M8	45 mm	1.25 mm	4 mm	14.5 mm	16.362 g
FBK03A2P08050	M8	50 mm	1.25 mm	4 mm	14.5 mm	17.978 g
FBK03A2P08055	M8	55 mm	1.25 mm	4 mm	14.5 mm	19.594 g
FBK03A2P08060	M8	60 mm	1.25 mm	4 mm	14.5 mm	21.21 g
FBK03A2P08070	M8	70 mm	1.25 mm	4 mm	14.5 mm	24.442 g



Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Weight
FBK03A2P08080	M8	80 mm	1.25 mm	4 mm	14.5 mm	27.674 g
FBK03A2P08090	M8	90 mm	1.25 mm	4 mm	14.5 mm	30.906 g
FBK03A2P08100	M8	100 mm	1.25 mm	4 mm	14.5 mm	34.138 g
FBK03A2P08110	M8	110 mm	1.25 mm	4 mm	14.5 mm	37.37 g
FBK03A2P08120	M8	120 mm	1.25 mm	4 mm	14.5 mm	40.602 g
FBK03A2P08130	M8	130 mm	1.25 mm	4 mm	14.5 mm	43.834 g
FBK03A2P08140	M8	140 mm	1.25 mm	4 mm	14.5 mm	47.066 g
FBK03A2P08150	M8	150 mm	1.25 mm	4 mm	14.5 mm	50.298 g
FBK03A2P08160	M8	160 mm	1.25 mm	4 mm	14.5 mm	53.53 g
FBK03A2P10016	M10	16 mm	1.5 mm	5 mm	18 mm	11.716 g
FBK03A2P10020	M10	20 mm	1.5 mm	5 mm	18 mm	13.736 g
FBK03A2P10025	M10	25 mm	1.5 mm	5 mm	18 mm	16.261 g
FBK03A2P10030	M10	30 mm	1.5 mm	5 mm	18 mm	18.786 g
FBK03A2P10035	M10	35 mm	1.5 mm	5 mm	18 mm	21.311 g
FBK03A2P10040	M10	40 mm	1.5 mm	5 mm	18 mm	23.836 g
FBK03A2P10045	M10	45 mm	1.5 mm	5 mm	18 mm	26.361 g
FBK03A2P10050	M10	50 mm	1.5 mm	5 mm	18 mm	28.886 g
FBK03A2P10055	M10	55 mm	1.5 mm	5 mm	18 mm	31.411 g
FBK03A2P10060	M10	60 mm	1.5 mm	5 mm	18 mm	34.037 g
FBK03A2P10070	M10	70 mm	1.5 mm	5 mm	18 mm	39.289 g
FBK03A2P10080	M10	80 mm	1.5 mm	5 mm	18 mm	44.541 g
FBK03A2P10090	M10	90 mm	1.5 mm	5 mm	18 mm	49.793 g
FBK03A2P10100	M10	100 mm	1.5 mm	5 mm	18 mm	55.045 g
FBK03A2P10110	M10	110 mm	1.5 mm	5 mm	18 mm	60.297 g
FBK03A2P10120	M10	120 mm	1.5 mm	5 mm	18 mm	65.549 g
FBK03A2P10130	M10	130 mm	1.5 mm	5 mm	18 mm	70.801 g
FBK03A2P10140	M10	140 mm	1.5 mm	5 mm	18 mm	76.053 g
FBK03A2P10150	M10	150 mm	1.5 mm	5 mm	18 mm	81.305 g
FBK03A2P10160	M10	160 mm	1.5 mm	5 mm	18 mm	86.557 g
FBK03A2P12020	M12	20 mm	1.75 mm	6 mm	22 mm	21.008 g
FBK03A2P12025	M12	25 mm	1.75 mm	6 mm	22 mm	24.644 g
FBK03A2P12030	M12	30 mm	1.75 mm	6 mm	22 mm	28.381 g
FBK03A2P12035	M12	35 mm	1.75 mm	6 mm	22 mm	32.017 g
FBK03A2P12040	M12	40 mm	1.75 mm	6 mm	22 mm	35.653 g
FBK03A2P12045	M12	45 mm	1.75 mm	6 mm	22 mm	39.39 g
FBK03A2P12050	M12	50 mm	1.75 mm	6 mm	22 mm	43.026 g
FBK03A2P12055	M12	55 mm	1.75 mm	6 mm	22 mm	46.662 g



Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Weight
FBK03A2P12060	M12	60 mm	1.75 mm	6 mm	22 mm	50.298 g
FBK03A2P12070	M12	70 mm	1.75 mm	6 mm	22 mm	57.671 g
FBK03A2P12080	M12	80 mm	1.75 mm	6 mm	22 mm	65.044 g
FBK03A2P12090	M12	90 mm	1.75 mm	6 mm	22 mm	72.417 g
FBK03A2P12100	M12	100 mm	1.75 mm	6 mm	22 mm	79.79 g
FBK03A2P12110	M12	110 mm	1.75 mm	6 mm	22 mm	87.163 g
FBK03A2P12120	M12	120 mm	1.75 mm	6 mm	22 mm	94.536 g
FBK03A2P12130	M12	130 mm	1.75 mm	6 mm	22 mm	101.909 g
FBK03A2P12140	M12	140 mm	1.75 mm	6 mm	22 mm	109.282 g
FBK03A2P12150	M12	150 mm	1.75 mm	6 mm	22 mm	116.655 g
FBK03A2P12160	M12	160 mm	1.75 mm	6 mm	22 mm	124.028 g
FBK03A2P14020	M14	20 mm	2 mm	7 mm	25 mm	30.199 g
FBK03A2P14025	M14	25 mm	2 mm	7 mm	25 mm	35.249 g
FBK03A2P14030	M14	30 mm	2 mm	7 mm	25 mm	40.299 g
FBK03A2P14035	M14	35 mm	2 mm	7 mm	25 mm	45.349 g
FBK03A2P14040	M14	40 mm	2 mm	7 mm	25 mm	50.298 g
FBK03A2P14045	M14	45 mm	2 mm	7 mm	25 mm	55.348 g
FBK03A2P14050	M14	50 mm	2 mm	7 mm	25 mm	60.398 g
FBK03A2P14055	M14	55 mm	2 mm	7 mm	25 mm	65.347 g
FBK03A2P14060	M14	60 mm	2 mm	7 mm	25 mm	70.397 g
FBK03A2P14070	M14	70 mm	2 mm	7 mm	25 mm	80.497 g
FBK03A2P14080	M14	80 mm	2 mm	7 mm	25 mm	90.597 g
FBK03A2P14090	M14	90 mm	2 mm	7 mm	25 mm	100.697 g
FBK03A2P14100	M14	100 mm	2 mm	7 mm	25 mm	110.797 g
FBK03A2P14110	M14	110 mm	2 mm	7 mm	25 mm	120.897 g
FBK03A2P14120	M14	120 mm	2 mm	7 mm	25 mm	130.997 g
FBK03A2P14130	M14	130 mm	2 mm	7 mm	25 mm	141.097 g
FBK03A2P14140	M14	140 mm	2 mm	7 mm	25 mm	151.197 g
FBK03A2P14150	M14	150 mm	2 mm	7 mm	25 mm	161.297 g
FBK03A2P16020	M16	20 mm	2 mm	8 mm	29 mm	41.44 g
FBK03A2P16025	M16	25 mm	2 mm	8 mm	29 mm	48.177 g
FBK03A2P16030	M16	30 mm	2 mm	8 mm	29 mm	54.944 g
FBK03A2P16035	M16	35 mm	2 mm	8 mm	29 mm	61.711 g
FBK03A2P16040	M16	40 mm	2 mm	8 mm	29 mm	68.478 g
FBK03A2P16045	M16	45 mm	2 mm	8 mm	29 mm	75.245 g
FBK03A2P16050	M16	50 mm	2 mm	8 mm	29 mm	81.911 g
FBK03A2P16055	M16	55 mm	2 mm	8 mm	29 mm	88.678 g



Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Weight
FBK03A2P16060	M16	60 mm	2 mm	8 mm	29 mm	95.344 g
FBK03A2P16070	M16	70 mm	2 mm	8 mm	29 mm	109.08 g
FBK03A2P16080	M16	80 mm	2 mm	8 mm	29 mm	122.21 g
FBK03A2P16090	M16	90 mm	2 mm	8 mm	29 mm	135.34 g
FBK03A2P16100	M16	100 mm	2 mm	8 mm	29 mm	149.48 g
FBK03A2P16110	M16	110 mm	2 mm	8 mm	29 mm	163.62 g
FBK03A2P16120	M16	120 mm	2 mm	8 mm	29 mm	177.76 g
FBK03A2P16130	M16	130 mm	2 mm	8 mm	29 mm	191.9 g
FBK03A2P16140	M16	140 mm	2 mm	8 mm	29 mm	206.04 g
FBK03A2P16150	M16	150 mm	2 mm	8 mm	29 mm	220.18 g
FBK03A2P18050	M18	50 mm	2.5 mm	9 mm	33 mm	106.05 g
FBK03A2P18055	M18	55 mm	2.5 mm	9 mm	33 mm	115.14 g
FBK03A2P18060	M18	60 mm	2.5 mm	9 mm	33 mm	123.22 g
FBK03A2P18070	M18	70 mm	2.5 mm	9 mm	33 mm	139.38 g
FBK03A2P18080	M18	80 mm	2.5 mm	9 mm	33 mm	156.55 g
FBK03A2P18090	M18	90 mm	2.5 mm	9 mm	33 mm	172.71 g
FBK03A2P18100	M18	100 mm	2.5 mm	9 mm	33 mm	189.88 g
FBK03A2P18110	M18	110 mm	2.5 mm	9 mm	33 mm	207.05 g
FBK03A2P18120	M18	120 mm	2.5 mm	9 mm	33 mm	224.22 g
FBK03A2P18130	M18	130 mm	2.5 mm	9 mm	33 mm	241.39 g
FBK03A2P18140	M18	140 mm	2.5 mm	9 mm	33 mm	258.56 g
FBK03A2P18150	M18	150 mm	2.5 mm	9 mm	33 mm	275.73 g
FBK03A2P20050	M20	50 mm	2.5 mm	10 mm	36 mm	133.32 g
FBK03A2P20055	M20	55 mm	2.5 mm	10 mm	36 mm	144.43 g
FBK03A2P20060	M20	60 mm	2.5 mm	10 mm	36 mm	154.53 g
FBK03A2P20070	M20	70 mm	2.5 mm	10 mm	36 mm	175.74 g
FBK03A2P20080	M20	80 mm	2.5 mm	10 mm	36 mm	196.95 g
FBK03A2P20090	M20	90 mm	2.5 mm	10 mm	36 mm	218.16 g
FBK03A2P20100	M20	100 mm	2.5 mm	10 mm	36 mm	239.37 g
FBK03A2P20110	M20	110 mm	2.5 mm	10 mm	36 mm	260.58 g
FBK03A2P20120	M20	120 mm	2.5 mm	10 mm	36 mm	281.79 g
FBK03A2P20130	M20	130 mm	2.5 mm	10 mm	36 mm	303 g
FBK03A2P20140	M20	140 mm	2.5 mm	10 mm	36 mm	324.21 g
FBK03A2P20150	M20	150 mm	2.5 mm	10 mm	36 mm	345.42 g
FBK03A2P24050	M24	50 mm	3 mm	—	—	—

Part numbers: 337





STANDARDS & CERTIFICATES

Standards

DIN 963 – Slotted Countersunk Head Screw

ISO 2009 – Slotted Countersunk Head Screw

