


Hex Nut DIN 934 / ISO 4032 - Stainless steel A2-70, Plain

Hex Nut to DIN 934 / ISO 4032, in the sizes, grades and finishes listed.

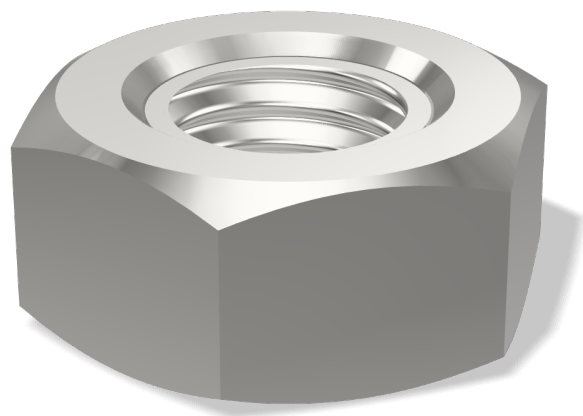

TECHNICAL DATA



Materials & Finish

Property class / grade	A2-70
Material	Stainless steel

Surface finish

Plain

DIMENSIONS



s Width across flats (WAF)

e Width across corners

m Nut height

Hex Nut DIN 934 / ISO 4032 - dimensions

AVAILABLE PART NUMBERS

Part number	Size	Thread pitch	Width across flats (s)	Width across corners (e)	Nut height (m)	Weight
FNH01S2P01000	M1	0.25 mm	2.5 mm	2.71 mm	0.8 mm	0.0303 g
FNH01S2PB2000	M1.2	0.25 mm	3 mm	3.28 mm	1 mm	0.0545 g
FNH01S2PB4000	M1.4	0.3 mm	3 mm	3.28 mm	1.2 mm	0.0636 g
FNH02S2PB6000	M1.6	0.35 mm	3.2 mm	3.41 mm	1.3 mm	0.0768 g
FNH01S2PB7000	M1.7	0.35 mm	3.5 mm	3.82 mm	1.4 mm	0.101 g
FNH02S2P02000	M2	0.4 mm	4 mm	4.32 mm	1.6 mm	0.1434 g
FNH01S2PC3000	M2.3	0.4 mm	4.5 mm	4.88 mm	1.8 mm	0.202 g
FNH02S2PC5000	M2.5	0.45 mm	5 mm	5.45 mm	2 mm	0.2828 g



Part number	Size	Thread pitch	Width across flats (s)	Width across corners (e)	Nut height (m)	Weight
FNH01S2PC6000	M2.6	0.45 mm	5 mm	5.45 mm	2 mm	0.2586 g
FNH02S2P03000	M3	0.5 mm	5.5 mm	6.01 mm	2.4 mm	0.3878 g
FNH02S2PD5000	M3.5	0.6 mm	6 mm	6.58 mm	2.8 mm	0.5191 g
FNH02S2P04000	M4	0.7 mm	7 mm	7.66 mm	3.2 mm	0.8181 g
FNH01S2P05000	M5	0.8 mm	8 mm	8.79 mm	4 mm	1.242 g
FNH08S2P05000	M5	0.8 mm	8 mm	8.79 mm	4.7 mm	1.242 g
FNH01S2P06000	M6	1 mm	10 mm	11.05 mm	5 mm	2.525 g
FNH08S2P06000	M6	1 mm	10 mm	11.05 mm	5.2 mm	2.525 g
FNH01S2PL3000	M6x0.75	0.75 mm	10 mm	11.05 mm	5 mm	2.525 g
FNH01S2P07000	M7	1 mm	11 mm	12.12 mm	5.5 mm	3.151 g
FNH01S2P08000	M8	1.25 mm	13 mm	14.38 mm	6.5 mm	5.252 g
FNH08S2P08000	M8	1.25 mm	13 mm	14.38 mm	6.8 mm	5.252 g
FNH01S2PL5000	M8x0.75	0.75 mm	13 mm	14.38 mm	6.5 mm	5.252 g
FNH01S2PL6000	M8x1	1 mm	13 mm	14.38 mm	6.5 mm	5.252 g
FNH01S2P10000	M10	1.5 mm	17 mm	18.9 mm	8 mm	11.716 g
FNH08S2P10000	M10	1.5 mm	16 mm	17.77 mm	8.4 mm	11.716 g
FNH01S2PL7000	M10x1	1 mm	17 mm	18.9 mm	8 mm	11.716 g
FNH01S2PL8000	M10x1.25	1.25 mm	17 mm	18.9 mm	8 mm	11.716 g
FNH01S2P12000	M12	1.75 mm	19 mm	21.1 mm	10 mm	17.473 g
FNH08S2P12000	M12	1.75 mm	18 mm	20.03 mm	10.8 mm	17.473 g
FNH01S2PL9000	M12x1	1 mm	19 mm	21.1 mm	10 mm	17.473 g
FNH01S2PN0000	M12x1.25	1.25 mm	19 mm	21.1 mm	10 mm	17.473 g
FNH01S2PN1000	M12x1.5	1.5 mm	19 mm	21.1 mm	10 mm	17.473 g
FNH01S2P14000	M14	2 mm	22 mm	24.49 mm	11 mm	25.25 g
FNH08S2P14000	M14	2 mm	21 mm	23.36 mm	12.8 mm	25.25 g
FNH01S2PN3000	M14x1.5	1.5 mm	22 mm	24.49 mm	11 mm	25.25 g
FNH01S2P16000	M16	2 mm	24 mm	26.75 mm	13 mm	33.633 g
FNH08S2P16000	M16	2 mm	24 mm	26.75 mm	14.8 mm	33.633 g
FNH01S2PN6000	M16x1.5	1.5 mm	24 mm	26.75 mm	13 mm	33.633 g
FNH01S2P18000	M18	2.5 mm	27 mm	29.56 mm	15 mm	49.894 g
FNH08S2P18000	M18	2.5 mm	27 mm	29.56 mm	15.8 mm	49.894 g
FNH01S2PN8000	M18x1.5	1.5 mm	27 mm	29.56 mm	15 mm	49.894 g
FNH01S2P20000	M20	2.5 mm	30 mm	32.95 mm	16 mm	65.044 g
FNH08S2P20000	M20	2.5 mm	30 mm	32.95 mm	18 mm	65.044 g
FNH01S2PP1000	M20x1.5	1.5 mm	30 mm	32.95 mm	16 mm	65.044 g
FNH01S2PP2000	M20x2	2 mm	30 mm	32.95 mm	16 mm	65.044 g
FNH01S2P22000	M22	2.5 mm	32 mm	35.03 mm	18 mm	79.79 g



Part number	Size	Thread pitch	Width across flats (s)	Width across corners (e)	Nut height (m)	Weight
FNH08S2P22000	M22	2.5 mm	34 mm	37.29 mm	19.4 mm	79.79 g
FNH01S2PP3000	M22x1.5	1.5 mm	32 mm	35.03 mm	18 mm	79.79 g
FNH01S2P24000	M24	3 mm	36 mm	39.55 mm	19 mm	111.1 g
FNH08S2P24000	M24	3 mm	36 mm	39.55 mm	21.5 mm	111.1 g
FNH01S2PP5000	M24x1.5	1.5 mm	36 mm	39.55 mm	19 mm	111.1 g
FNH01S2PP6000	M24x2	2 mm	36 mm	39.55 mm	19 mm	111.1 g

Part numbers: 51

STANDARDS & CERTIFICATES

Standards

DIN 934 – Hex Nut

ISO 4032 – Hex Nut

