


Slotted Capstan Screw DIN 404 - Stainless steel A1, Plain

Slotted Capstan Screw to DIN 404, in the sizes, grades and finishes listed.

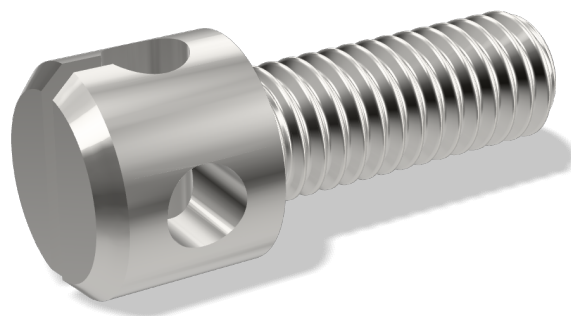

TECHNICAL DATA

General

Standard	DIN 404
----------	---------



Dimensions

Thread form	Metric ISO thread
-------------	-------------------

Materials & Finish

Drive type	Slotted
Property class / grade	A1 stainless
Material	Stainless steel
Surface finish	Plain

DIMENSIONS

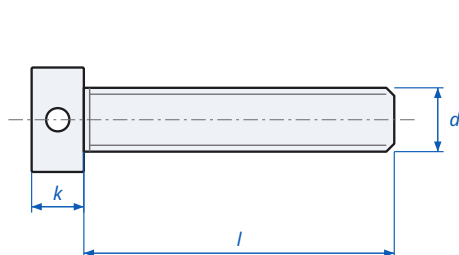

d	Thread diameter
l	Length
k	Head height
dk	Head diameter

Slotted Capstan Screw DIN 404 - dimensions

AVAILABLE PART NUMBERS

Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Weight
FBA01A1P03004	M3	4 mm	0.5 mm	4 mm	5.5 mm	0.6303 g
FBA01A1P03005	M3	5 mm	0.5 mm	4 mm	5.5 mm	0.6749 g
FBA01A1P03006	M3	6 mm	0.5 mm	4 mm	5.5 mm	0.7194 g
FBA01A1P03008	M3	8 mm	0.5 mm	4 mm	5.5 mm	0.8085 g
FBA01A1P03010	M3	10 mm	0.5 mm	4 mm	5.5 mm	0.8977 g
FBA01A1P03012	M3	12 mm	0.5 mm	4 mm	5.5 mm	0.9868 g
FBA01A1P03016	M3	16 mm	0.5 mm	4 mm	5.5 mm	1.165 g
FBA01A1P03020	M3	20 mm	0.5 mm	4 mm	5.5 mm	1.343 g



Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Weight
FBA01A1P04005	M4	5 mm	0.7 mm	5 mm	7 mm	1.307 g
FBA01A1P04006	M4	6 mm	0.7 mm	5 mm	7 mm	1.385 g
FBA01A1P04008	M4	8 mm	0.7 mm	5 mm	7 mm	1.541 g
FBA01A1P04010	M4	10 mm	0.7 mm	5 mm	7 mm	1.698 g
FBA01A1P04012	M4	12 mm	0.7 mm	5 mm	7 mm	1.854 g
FBA01A1P04016	M4	16 mm	0.7 mm	5 mm	7 mm	2.167 g
FBA01A1P04020	M4	20 mm	0.7 mm	5 mm	7 mm	2.481 g
FBA01A1P04025	M4	25 mm	0.7 mm	5 mm	7 mm	2.871 g
FBA01A1P04030	M4	30 mm	0.7 mm	5 mm	7 mm	3.263 g
FBA01A1P05008	M5	8 mm	0.8 mm	6.5 mm	8.5 mm	2.754 g
FBA01A1P05010	M5	10 mm	0.8 mm	6.5 mm	8.5 mm	3.005 g
FBA01A1P05012	M5	12 mm	0.8 mm	6.5 mm	8.5 mm	3.254 g
FBA01A1P05016	M5	16 mm	0.8 mm	6.5 mm	8.5 mm	3.754 g
FBA01A1P05020	M5	20 mm	0.8 mm	6.5 mm	8.5 mm	4.254 g
FBA01A1P05025	M5	25 mm	0.8 mm	6.5 mm	8.5 mm	4.879 g
FBA01A1P05030	M5	30 mm	0.8 mm	6.5 mm	8.5 mm	5.503 g
FBA01A1P06010	M6	10 mm	1 mm	8 mm	10 mm	4.771 g
FBA01A1P06012	M6	12 mm	1 mm	8 mm	10 mm	5.128 g
FBA01A1P06016	M6	16 mm	1 mm	8 mm	10 mm	5.841 g
FBA01A1P06020	M6	20 mm	1 mm	8 mm	10 mm	6.554 g
FBA01A1P06025	M6	25 mm	1 mm	8 mm	10 mm	7.445 g
FBA01A1P06030	M6	30 mm	1 mm	8 mm	10 mm	8.336 g

Part numbers: 30

STANDARDS & CERTIFICATES

Standards

DIN 404 – Slotted Capstan Screw

