


Slotted Pan Head Screw DIN 85 - Stainless steel A4, Plain

Slotted Pan Head Screw to DIN 85, in the sizes, grades and finishes listed.

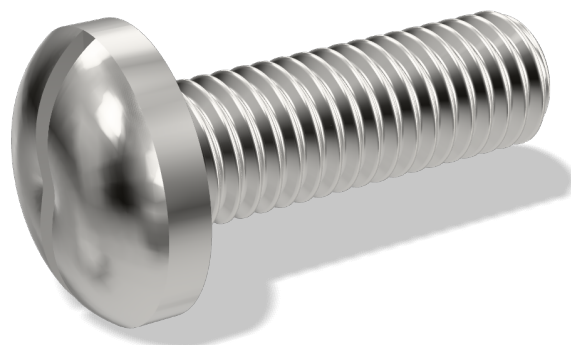

TECHNICAL DATA

General

Standard	DIN 85
----------	--------

Dimensions


Thread form	Metric ISO thread
-------------	-------------------

Materials & Finish

Head type	Pan
-----------	-----

Drive type	Slotted
Property class / grade	A4 stainless
Material	Stainless steel
Surface finish	Plain

DIMENSIONS

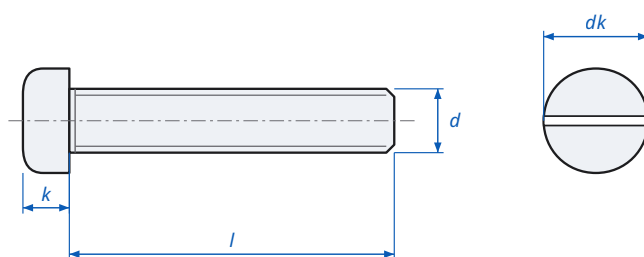

d	Thread diameter
l	Length
k	Head height
dk	Head diameter

Slotted Pan Head Screw DIN 85 - dimensions

AVAILABLE PART NUMBERS

Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Weight
FBP01A4PB6005	M1.6	5 mm	0.35 mm	–	–	0.106 g
FBP01A4PB6006	M1.6	6 mm	0.35 mm	–	–	0.1182 g
FBP01A4PB6008	M1.6	8 mm	0.35 mm	–	–	0.1414 g
FBP01A4PB6010	M1.6	10 mm	0.35 mm	–	–	0.1646 g
FBP01A4P02003	M2	3 mm	0.4 mm	–	–	0.1616 g
FBP01A4P02004	M2	4 mm	0.4 mm	–	–	0.1808 g



Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Weight
FBP01A4P02005	M2	5 mm	0.4 mm	–	–	0.2 g
FBP01A4P02006	M2	6 mm	0.4 mm	–	–	0.2192 g
FBP01A4P02008	M2	8 mm	0.4 mm	–	–	0.2565 g
FBP01A4P02010	M2	10 mm	0.4 mm	–	–	0.2939 g
FBP01A4P02012	M2	12 mm	0.4 mm	–	–	0.3323 g
FBP01A4P02014	M2	14 mm	0.4 mm	–	–	0.3686 g
FBP01A4P02016	M2	16 mm	0.4 mm	–	–	0.406 g
FBP01A4P02018	M2	18 mm	0.4 mm	–	–	0.4444 g
FBP01A4P02020	M2	20 mm	0.4 mm	–	–	0.4828 g
FBP01A4P02025	M2	25 mm	0.4 mm	–	–	0.5787 g
FBP01A4P02030	M2	30 mm	0.4 mm	–	–	0.6747 g
FBP01A4PC5003	M2.5	3 mm	0.45 mm	–	–	0.2747 g
FBP01A4PC5004	M2.5	4 mm	0.45 mm	–	–	0.305 g
FBP01A4PC5005	M2.5	5 mm	0.45 mm	–	–	0.3353 g
FBP01A4PC5006	M2.5	6 mm	0.45 mm	–	–	0.3656 g
FBP01A4PC5008	M2.5	8 mm	0.45 mm	–	–	0.4262 g
FBP01A4PC5010	M2.5	10 mm	0.45 mm	–	–	0.4868 g
FBP01A4PC5012	M2.5	12 mm	0.45 mm	–	–	0.5474 g
FBP01A4PC5014	M2.5	14 mm	0.45 mm	–	–	0.608 g
FBP01A4PC5016	M2.5	16 mm	0.45 mm	–	–	0.6686 g
FBP01A4PC5018	M2.5	18 mm	0.45 mm	–	–	0.7292 g
FBP01A4PC5020	M2.5	20 mm	0.45 mm	–	–	0.7898 g
FBP01A4PC5022	M2.5	22 mm	0.45 mm	–	–	0.8504 g
FBP01A4PC5025	M2.5	25 mm	0.45 mm	–	–	0.9413 g
FBP01A4PC5030	M2.5	30 mm	0.45 mm	–	–	1.093 g
FBP01A4P03003	M3	3 mm	0.5 mm	1.8 mm	6 mm	0.4757 g
FBP01A4P03004	M3	4 mm	0.5 mm	1.8 mm	6 mm	0.5202 g
FBP01A4P03005	M3	5 mm	0.5 mm	1.8 mm	6 mm	0.5656 g
FBP01A4P03006	M3	6 mm	0.5 mm	1.8 mm	6 mm	0.61 g
FBP01A4P03008	M3	8 mm	0.5 mm	1.8 mm	6 mm	0.6989 g
FBP01A4P03010	M3	10 mm	0.5 mm	1.8 mm	6 mm	0.7878 g
FBP01A4P03012	M3	12 mm	0.5 mm	1.8 mm	6 mm	0.8767 g
FBP01A4P03014	M3	14 mm	0.5 mm	1.8 mm	6 mm	0.9656 g
FBP01A4P03016	M3	16 mm	0.5 mm	1.8 mm	6 mm	1.05 g
FBP01A4P03018	M3	18 mm	0.5 mm	1.8 mm	6 mm	1.141 g
FBP01A4P03020	M3	20 mm	0.5 mm	1.8 mm	6 mm	1.232 g
FBP01A4P03022	M3	22 mm	0.5 mm	1.8 mm	6 mm	1.323 g



Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Weight
FBP01A4P03025	M3	25 mm	0.5 mm	1.8 mm	6 mm	1.454 g
FBP01A4P03030	M3	30 mm	0.5 mm	1.8 mm	6 mm	1.677 g
FBP01A4P03035	M3	35 mm	0.5 mm	1.8 mm	6 mm	1.899 g
FBP01A4P03040	M3	40 mm	0.5 mm	1.8 mm	6 mm	2.121 g
FBP01A4P03045	M3	45 mm	0.5 mm	1.8 mm	6 mm	2.343 g
FBP01A4P03050	M3	50 mm	0.5 mm	1.8 mm	6 mm	2.565 g
FBP01A4PD5005	M3.5	5 mm	0.6 mm	2.1 mm	7 mm	0.7939 g
FBP01A4PD5006	M3.5	6 mm	0.6 mm	2.1 mm	7 mm	0.8534 g
FBP01A4PD5008	M3.5	8 mm	0.6 mm	2.1 mm	7 mm	0.9757 g
FBP01A4PD5010	M3.5	10 mm	0.6 mm	2.1 mm	7 mm	1.091 g
FBP01A4PD5012	M3.5	12 mm	0.6 mm	2.1 mm	7 mm	1.212 g
FBP01A4PD5014	M3.5	14 mm	0.6 mm	2.1 mm	7 mm	1.333 g
FBP01A4PD5016	M3.5	16 mm	0.6 mm	2.1 mm	7 mm	1.454 g
FBP01A4PD5018	M3.5	18 mm	0.6 mm	2.1 mm	7 mm	1.576 g
FBP01A4PD5020	M3.5	20 mm	0.6 mm	2.1 mm	7 mm	1.697 g
FBP01A4PD5022	M3.5	22 mm	0.6 mm	2.1 mm	7 mm	1.818 g
FBP01A4PD5025	M3.5	25 mm	0.6 mm	2.1 mm	7 mm	2 g
FBP01A4PD5030	M3.5	30 mm	0.6 mm	2.1 mm	7 mm	2.303 g
FBP01A4PD5035	M3.5	35 mm	0.6 mm	2.1 mm	7 mm	2.596 g
FBP01A4PD5040	M3.5	40 mm	0.6 mm	2.1 mm	7 mm	2.899 g
FBP01A4PD5045	M3.5	45 mm	0.6 mm	2.1 mm	7 mm	3.202 g
FBP01A4PD5050	M3.5	50 mm	0.6 mm	2.1 mm	7 mm	3.505 g
FBP01A4P04005	M4	5 mm	0.7 mm	2.4 mm	8 mm	1.101 g
FBP01A4P04006	M4	6 mm	0.7 mm	2.4 mm	8 mm	1.182 g
FBP01A4P04008	M4	8 mm	0.7 mm	2.4 mm	8 mm	1.343 g
FBP01A4P04010	M4	10 mm	0.7 mm	2.4 mm	8 mm	1.485 g
FBP01A4P04012	M4	12 mm	0.7 mm	2.4 mm	8 mm	1.646 g
FBP01A4P04014	M4	14 mm	0.7 mm	2.4 mm	8 mm	1.808 g
FBP01A4P04016	M4	16 mm	0.7 mm	2.4 mm	8 mm	1.97 g
FBP01A4P04018	M4	18 mm	0.7 mm	2.4 mm	8 mm	2.121 g
FBP01A4P04020	M4	20 mm	0.7 mm	2.4 mm	8 mm	2.272 g
FBP01A4P04022	M4	22 mm	0.7 mm	2.4 mm	8 mm	2.424 g
FBP01A4P04025	M4	25 mm	0.7 mm	2.4 mm	8 mm	2.666 g
FBP01A4P04030	M4	30 mm	0.7 mm	2.4 mm	8 mm	3.05 g
FBP01A4P04035	M4	35 mm	0.7 mm	2.4 mm	8 mm	3.444 g
FBP01A4P04040	M4	40 mm	0.7 mm	2.4 mm	8 mm	3.838 g
FBP01A4P04045	M4	45 mm	0.7 mm	2.4 mm	8 mm	4.212 g



Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Weight
FBP01A4P04050	M4	50 mm	0.7 mm	2.4 mm	8 mm	4.616 g
FBP01A4P04055	M4	55 mm	0.7 mm	2.4 mm	8 mm	5.02 g
FBP01A4P04060	M4	60 mm	0.7 mm	2.4 mm	8 mm	5.424 g
FBP01A4P05006	M5	6 mm	0.8 mm	3 mm	10 mm	2.081 g
FBP01A4P05008	M5	8 mm	0.8 mm	3 mm	10 mm	2.222 g
FBP01A4P05010	M5	10 mm	0.8 mm	3 mm	10 mm	2.575 g
FBP01A4P05012	M5	12 mm	0.8 mm	3 mm	10 mm	2.828 g
FBP01A4P05014	M5	14 mm	0.8 mm	3 mm	10 mm	3.08 g
FBP01A4P05016	M5	16 mm	0.8 mm	3 mm	10 mm	3.333 g
FBP01A4P05018	M5	18 mm	0.8 mm	3 mm	10 mm	3.575 g
FBP01A4P05020	M5	20 mm	0.8 mm	3 mm	10 mm	3.818 g
FBP01A4P05022	M5	22 mm	0.8 mm	3 mm	10 mm	4.06 g
FBP01A4P05025	M5	25 mm	0.8 mm	3 mm	10 mm	4.444 g
FBP01A4P05030	M5	30 mm	0.8 mm	3 mm	10 mm	5.07 g
FBP01A4P05035	M5	35 mm	0.8 mm	3 mm	10 mm	5.676 g
FBP01A4P05040	M5	40 mm	0.8 mm	3 mm	10 mm	6.312 g
FBP01A4P05045	M5	45 mm	0.8 mm	3 mm	10 mm	6.949 g
FBP01A4P05050	M5	50 mm	0.8 mm	3 mm	10 mm	7.575 g
FBP01A4P05055	M5	55 mm	0.8 mm	3 mm	10 mm	8.201 g
FBP01A4P05060	M5	60 mm	0.8 mm	3 mm	10 mm	8.827 g
FBP01A4P05065	M5	65 mm	0.8 mm	3 mm	10 mm	9.454 g
FBP01A4P05070	M5	70 mm	0.8 mm	3 mm	10 mm	10.08 g
FBP01A4P05075	M5	75 mm	0.8 mm	3 mm	10 mm	10.706 g
FBP01A4P05080	M5	80 mm	0.8 mm	3 mm	10 mm	11.332 g
FBP01A4P05090	M5	90 mm	0.8 mm	3 mm	10 mm	12.585 g
FBP01A4P05100	M5	100 mm	0.8 mm	3 mm	10 mm	13.837 g
FBP01A4P06006	M6	6 mm	1 mm	3.6 mm	12 mm	3.232 g
FBP01A4P06008	M6	8 mm	1 mm	3.6 mm	12 mm	3.596 g
FBP01A4P06010	M6	10 mm	1 mm	3.6 mm	12 mm	3.959 g
FBP01A4P06012	M6	12 mm	1 mm	3.6 mm	12 mm	4.313 g
FBP01A4P06014	M6	14 mm	1 mm	3.6 mm	12 mm	4.666 g
FBP01A4P06016	M6	16 mm	1 mm	3.6 mm	12 mm	5.03 g
FBP01A4P06018	M6	18 mm	1 mm	3.6 mm	12 mm	5.393 g
FBP01A4P06020	M6	20 mm	1 mm	3.6 mm	12 mm	5.747 g
FBP01A4P06022	M6	22 mm	1 mm	3.6 mm	12 mm	6.1 g
FBP01A4P06025	M6	25 mm	1 mm	3.6 mm	12 mm	6.626 g
FBP01A4P06030	M6	30 mm	1 mm	3.6 mm	12 mm	7.525 g



Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Weight
FBP01A4P06035	M6	35 mm	1 mm	3.6 mm	12 mm	8.332 g
FBP01A4P06040	M6	40 mm	1 mm	3.6 mm	12 mm	9.292 g
FBP01A4P06045	M6	45 mm	1 mm	3.6 mm	12 mm	10.1 g
FBP01A4P06050	M6	50 mm	1 mm	3.6 mm	12 mm	11.009 g
FBP01A4P06055	M6	55 mm	1 mm	3.6 mm	12 mm	11.918 g
FBP01A4P06060	M6	60 mm	1 mm	3.6 mm	12 mm	12.827 g
FBP01A4P06065	M6	65 mm	1 mm	3.6 mm	12 mm	13.736 g
FBP01A4P06070	M6	70 mm	1 mm	3.6 mm	12 mm	14.645 g
FBP01A4P06075	M6	75 mm	1 mm	3.6 mm	12 mm	15.554 g
FBP01A4P06080	M6	80 mm	1 mm	3.6 mm	12 mm	16.463 g
FBP01A4P06090	M6	90 mm	1 mm	3.6 mm	12 mm	18.281 g
FBP01A4P06100	M6	100 mm	1 mm	3.6 mm	12 mm	20.099 g
FBP01A4P08010	M8	10 mm	1.25 mm	4.8 mm	16 mm	7.928 g
FBP01A4P08012	M8	12 mm	1.25 mm	4.8 mm	16 mm	8.575 g
FBP01A4P08016	M8	16 mm	1.25 mm	4.8 mm	16 mm	9.868 g
FBP01A4P08020	M8	20 mm	1.25 mm	4.8 mm	16 mm	11.11 g
FBP01A4P08025	M8	25 mm	1.25 mm	4.8 mm	16 mm	12.726 g
FBP01A4P08030	M8	30 mm	1.25 mm	4.8 mm	16 mm	14.342 g
FBP01A4P08035	M8	35 mm	1.25 mm	4.8 mm	16 mm	15.958 g
FBP01A4P08040	M8	40 mm	1.25 mm	4.8 mm	16 mm	17.574 g
FBP01A4P08050	M8	50 mm	1.25 mm	4.8 mm	16 mm	20.806 g
FBP01A4P08055	M8	55 mm	1.25 mm	4.8 mm	16 mm	22.321 g
FBP01A4P08065	M8	65 mm	1.25 mm	4.8 mm	16 mm	25.351 g

Part numbers: 140

STANDARDS & CERTIFICATES

Standards

DIN 85 – Slotted Pan Head Screw

