


Hex Socket Countersunk Head Screw DIN 7991 / ISO 10642 - Steel 10.9, Zinc plated yellow

Hex Socket Countersunk Head Screw to DIN 7991 / ISO 10642, in the sizes, grades and finishes listed.

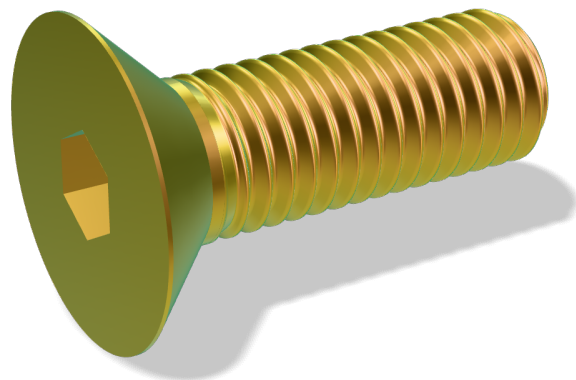

TECHNICAL DATA

General

Standard	DIN 7991
----------	----------

Dimensions


Thread form	Metric ISO thread
-------------	-------------------

Materials & Finish

Head type	Countersunk
-----------	-------------

Drive type	Hexagon socket
Property class / grade	10.9
Material	Steel
Surface finish	Zinc plated yellow

DIMENSIONS

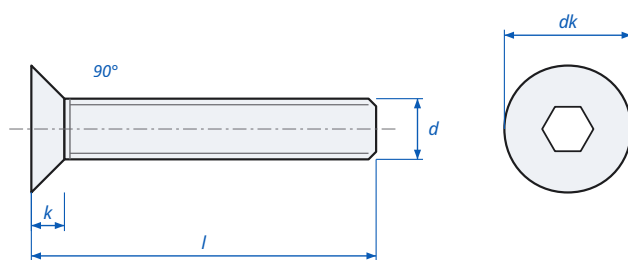

d	Thread diameter
l	Length
k	Head height
dk	Head diameter

Hex Socket Countersunk Head Screw DIN 7991 / ISO 10642 - dimensions

AVAILABLE PART NUMBERS

Part number	Size (d)	Length (l)	Thread pitch	Hex key size	Head height (k)	Head diameter (dk)	Weight
FBK02G1Y04012	M4	12 mm	0.7 mm	2.5 mm	2.3 mm	8 mm	1.23 g
FBK02G1Y06040	M6	40 mm	1 mm	4 mm	3.3 mm	12 mm	8.83 g
FBK02G1Y06045	M6	45 mm	1 mm	4 mm	3.3 mm	12 mm	9.915 g
FBK02G1Y08030	M8	30 mm	1.25 mm	5 mm	4.4 mm	16 mm	11.7 g





Part number	Size (d)	Length (l)	Thread pitch	Hex key size	Head height (k)	Head diameter (dk)	Weight
FBK02G1Y12030	M12	30 mm	1.75 mm	8 mm	6.5 mm	24 mm	28.5 g
FBK02G1Y16030	M16	30 mm	2 mm	10 mm	7.5 mm	30 mm	51.8 g

Part numbers: 6

STANDARDS & CERTIFICATES

Standards

DIN 7991 – Hex Socket Countersunk Head Screw

ISO 10642 – Hex Socket Countersunk Head Screw

