


Nylon Insert Lock Nut Thin Type DIN 985 - Stainless steel A4, Plain

Nylon Insert Lock Nut Thin Type to DIN 985, in the sizes, grades and finishes listed.

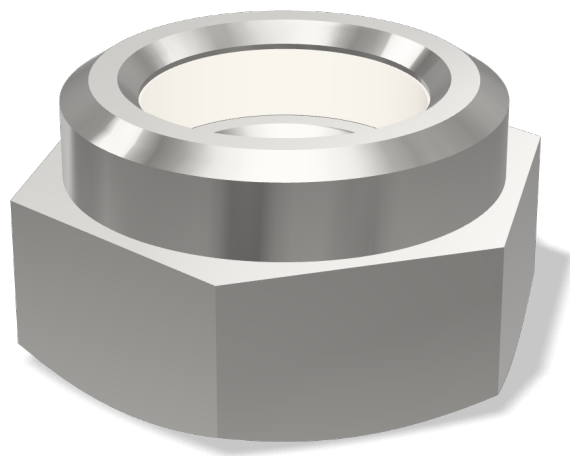

TECHNICAL DATA

General



Standard	DIN 985
----------	---------

Materials & Finish

Property class / grade	A4 stainless
------------------------	--------------

Material	Stainless steel
Surface finish	Plain

DIMENSIONS



- s** Width across flats (WAF)
- e** Width across corners
- m** Hex height
- h** Overall height

Nylon Insert Lock Nut Thin Type DIN 985 - dimensions

AVAILABLE PART NUMBERS

Part number	Size	Thread pitch	Width across flats (s)	Width across corners (e)	Nut height (m)	Overall height (h)	Weight
FNL01A4P02000	M2	0.4 mm	—	—	—	—	—
FNL01A4PC5000	M2.5	0.45 mm	—	—	—	—	—
FNL01A4P03000	M3	0.5 mm	5.5 mm	6.01 mm	2.4 mm	4 mm	0.505 g
FNL01A4P04000	M4	0.7 mm	7 mm	7.66 mm	2.9 mm	5 mm	1.01 g
FNL01A4P05000	M5	0.8 mm	8 mm	8.79 mm	3.2 mm	5 mm	1.414 g
FNL01A4P06000	M6	1 mm	10 mm	11.05 mm	4 mm	6 mm	2.424 g



Part number	Size	Thread pitch	Width across flats (s)	Width across corners (e)	Nut height (m)	Overall height (h)	Weight
FNL01A4P08000	M8	1.25 mm	13 mm	14.38 mm	5.5 mm	8 mm	5.151 g
FNL01A4PL6000	M8x1	1 mm	13 mm	14.38 mm	5.5 mm	8 mm	5.151 g
FNL01A4P10000	M10	1.5 mm	17 mm	18.9 mm	6.5 mm	10 mm	10.706 g
FNL01A4PL7000	M10x1	1 mm	17 mm	18.9 mm	6.5 mm	10 mm	10.706 g
FNL01A4P12000	M12	1.75 mm	19 mm	21.1 mm	8 mm	12 mm	17.372 g
FNL01A4PN1000	M12x1.5	1.5 mm	19 mm	21.1 mm	8 mm	12 mm	17.372 g
FNL01A4P14000	M14	2 mm	22 mm	24.49 mm	9.5 mm	14 mm	26.26 g
FNL01A4PN3000	M14x1.5	1.5 mm	22 mm	24.49 mm	9.5 mm	14 mm	26.26 g
FNL01A4P16000	M16	2 mm	24 mm	26.75 mm	10.5 mm	16 mm	34.34 g
FNL01A4PN6000	M16x1.5	1.5 mm	24 mm	26.75 mm	10.5 mm	16 mm	34.34 g
FNL01A4P18000	M18	2.5 mm	27 mm	29.56 mm	13 mm	18.5 mm	45.45 g
FNL01A4PN8000	M18x1.5	1.5 mm	27 mm	29.56 mm	13 mm	18.5 mm	45.45 g
FNL01A4P20000	M20	2.5 mm	30 mm	32.95 mm	14 mm	20 mm	65.65 g
FNL01A4PP1000	M20x1.5	1.5 mm	30 mm	32.95 mm	14 mm	20 mm	65.65 g
FNL01A4P22000	M22	2.5 mm	32 mm	35.03 mm	15 mm	22 mm	75.75 g
FNL01A4PP3000	M22x1.5	1.5 mm	32 mm	35.03 mm	15 mm	22 mm	75.75 g
FNL01A4P24000	M24	3 mm	36 mm	39.55 mm	15 mm	24 mm	101 g
FNL01A4PP6000	M24x2	2 mm	36 mm	39.55 mm	15 mm	24 mm	101 g
FNL01A4P27000	M27	3 mm	41 mm	45.2 mm	17 mm	27 mm	163.62 g
FNL01A4P30000	M30	3.5 mm	46 mm	50.85 mm	19 mm	30 mm	214.12 g
FNL01A4P33000	M33	3.5 mm	50 mm	55.37 mm	22 mm	33 mm	320.17 g
FNL01A4P36000	M36	4 mm	55 mm	60.79 mm	25 mm	36 mm	419.15 g

Part numbers: 28

STANDARDS & CERTIFICATES

Standards

DIN 985 – Nylon Insert Lock Nut Thin Type

