


Flat Countersunk Square Neck Bolt DIN 605 - Steel, Zinc plated

Flat Countersunk Square Neck Bolt to DIN 605, in the sizes, grades and finishes listed.

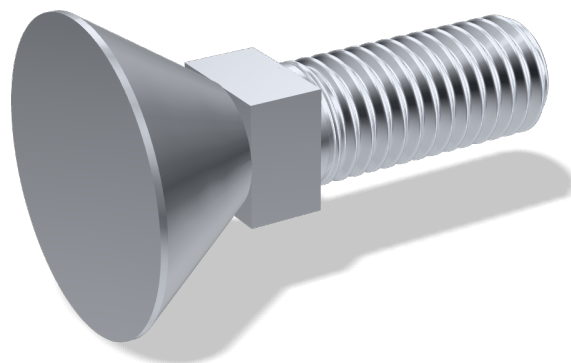

TECHNICAL DATA

General

Standard	DIN 605
----------	---------

Dimensions


Thread form	Metric ISO thread
-------------	-------------------

Materials & Finish

Head type	Countersunk
-----------	-------------

Drive type	No drive
Property class / grade	Steel
Material	Steel
Surface finish	Zinc plated

DIMENSIONS

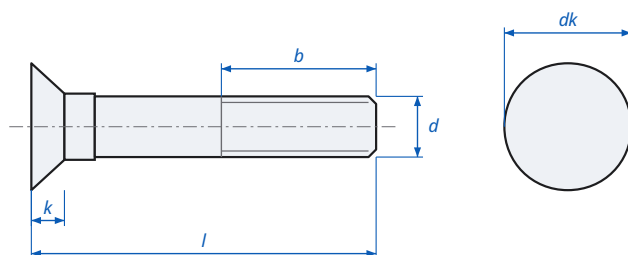

d	Thread diameter
l	Length
b	Thread length
k	Head height
dk	Head diameter

Flat Countersunk Square Neck Bolt DIN 605 - dimensions

AVAILABLE PART NUMBERS

Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Thread length (b)	Weight
FBK09STZ06030	M6	30 mm	1 mm	7.45 mm	16.55 mm	18 mm	10.24 g
FBK09STZ06035	M6	35 mm	1 mm	7.45 mm	16.55 mm	18 mm	11.13 g
FBK09STZ06040	M6	40 mm	1 mm	7.45 mm	16.55 mm	18 mm	12.01 g
FBK09STZ06050	M6	50 mm	1 mm	7.45 mm	16.55 mm	18 mm	13.77 g
FBK09STZ08030	M8	30 mm	1.25 mm	9.45 mm	20.65 mm	22 mm	19.28 g
FBK09STZ08035	M8	35 mm	1.25 mm	9.45 mm	20.65 mm	22 mm	20.87 g



Part number	Size (d)	Length (l)	Thread pitch	Head height (k)	Head diameter (dk)	Thread length (b)	Weight
FBK09STZ08040	M8	40 mm	1.25 mm	9.45 mm	20.65 mm	22 mm	22.46 g
FBK09STZ08050	M8	50 mm	1.25 mm	9.45 mm	20.65 mm	22 mm	25.65 g
FBK09STZ08060	M8	60 mm	1.25 mm	9.45 mm	20.65 mm	22 mm	28.83 g
FBK09STZ10040	M10	40 mm	1.5 mm	11.55 mm	24.65 mm	26 mm	36.93 g
FBK09STZ10050	M10	50 mm	1.5 mm	11.55 mm	24.65 mm	26 mm	41.96 g
FBK09STZ10060	M10	60 mm	1.5 mm	11.55 mm	24.65 mm	26 mm	46.98 g

Part numbers: 12

STANDARDS & CERTIFICATES

Standards

DIN 605 – Flat Countersunk Square Neck Bolt

