


Hex Flange Nut with Nylon Insert DIN 6926 - Steel 8 (nut), Zinc plated

Hex Flange Nut with Nylon Insert to DIN 6926, in the sizes, grades and finishes listed.

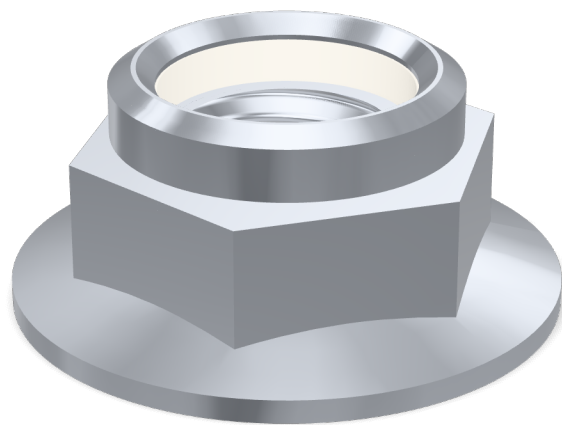

TECHNICAL DATA

General

Standard	DIN 6926
----------	----------



Dimensions

Thread form	Metric ISO thread
-------------	-------------------

Materials & Finish

Property class / grade	8 (nut)
Material	Steel
Surface finish	Zinc plated

DIMENSIONS



- s Width across flats (WAF)
- e Width across corners
- m Nut height
- dc Flange diameter

Hex Flange Nut with Nylon Insert DIN 6926 - dimensions

AVAILABLE PART NUMBERS

Part number	Variant	Size	Thread pitch	Width across flats (s)	Width across corners (e)	Nut height (m)	Flange diameter (dc)	Weight
FNF02C8Z04000	M4 Class 8 Zinc plated	M4	0.7 mm	—	—	—	—	—
FNF02C8Z05000	M5 Class 8 Zinc plated	M5	0.8 mm	8 mm	8.79 mm	4.7 mm	11.8 mm	0.2922 g
FNF02C8Z06000	M6 Class 8 Zinc plated	M6	1 mm	10 mm	11.05 mm	5.7 mm	14.2 mm	0.53 g
FNF02C8Z08000	M8 Class 8 Zinc plated	M8	1.25 mm	13 mm	14.38 mm	7.6 mm	17.9 mm	1.069 g



Part number	Variant	Size	Thread pitch	Width across flats (s)	Width across corners (e)	Nut height (m)	Flange diameter (dc)	Weight
FNF02C8Z10000	M10 Class 8 Zinc plated	M10	1.5 mm	15 mm	16.64 mm	9.6 mm	21.8 mm	1.749 g
FNF02C8Z12000	M12 Class 8 Zinc plated	M12	1.75 mm	18 mm	20.03 mm	11.6 mm	26 mm	3.013 g
FNF02C8Z14000	M14 Class 8 Zinc plated	M14	2 mm	21 mm	23.36 mm	13.3 mm	29.9 mm	4.675 g
FNF02C8Z16000	M16 Class 8 Zinc plated	M16	2 mm	24 mm	26.75 mm	15.3 mm	34.5 mm	6.982 g
FNF02C8Z20000	M20 Class 8 Zinc plated	M20	2.5 mm	30 mm	32.95 mm	18.9 mm	42.8 mm	13.46 g

Part numbers: 9

STANDARDS & CERTIFICATES

Standards

DIN 6926 – Hex Flange Nut with Nylon Insert

